

## RF 19 - Signal indicator, 1 x 1-module

### 3.14.002.052/0000

For more information, see LEDs.



Suitable for RK 90 system design, illuminated for 2-module keycap.

#### General information

|                      |         |
|----------------------|---------|
| Color of lens        | green   |
| Recommended key grid | 23/x mm |

#### Dimensions


|                |          |
|----------------|----------|
| Length         | 19.05 mm |
| Width          | 19.05 mm |
| Overall height | 9.15 mm  |


#### Mechanical design

|              |                         |
|--------------|-------------------------|
| Mounting     | THT soldering in PCB    |
| Illumination | fully illuminated 2 LED |
| LED color    | green                   |
| LED type     | 2 mm                    |


#### Other specifications

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| Ambient temp. operating min.           | -25 °C                                   |
| Ambient temp. operating max.           | +70 °C                                   |
| Environmental resistance               | acc. to IEC 60068-2-14, -30, -33 and -78 |
| Solderability / solder heat resistance | according to DIN EN 60068-2-20           |
| Wave soldering                         | 260 °C max.                              |
| Manual soldering                       | 350 °C / 5 sec. max.                     |
| ROHS compliant                         | yes                                      |
| REACH compliant                        | yes                                      |

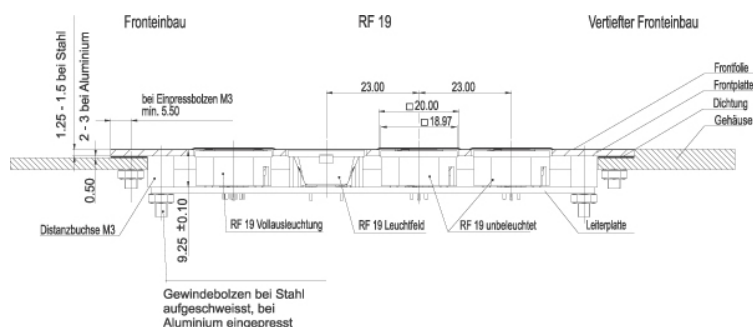

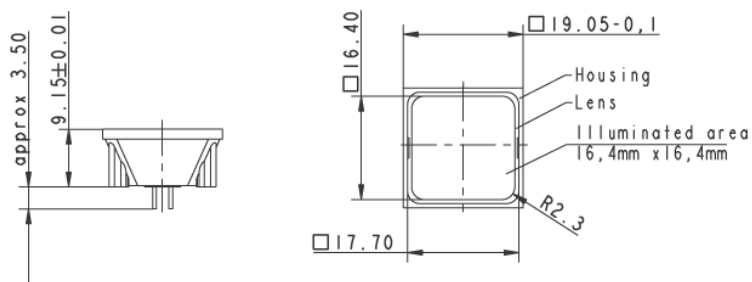

0,5 x 2-module, yellow

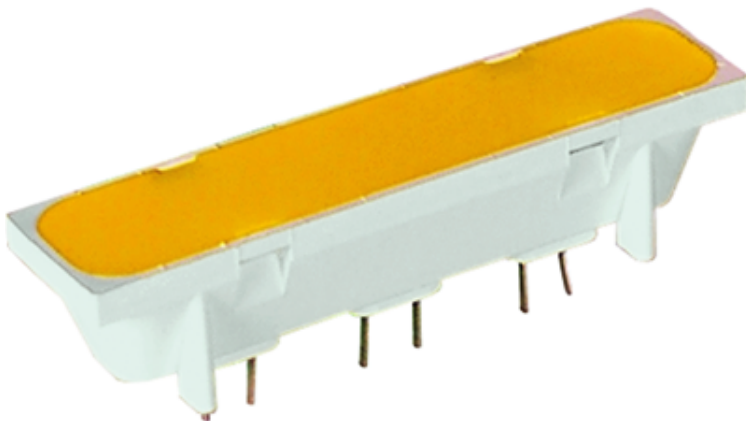

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RAFI:

[3.14.002.052/0000](#)