
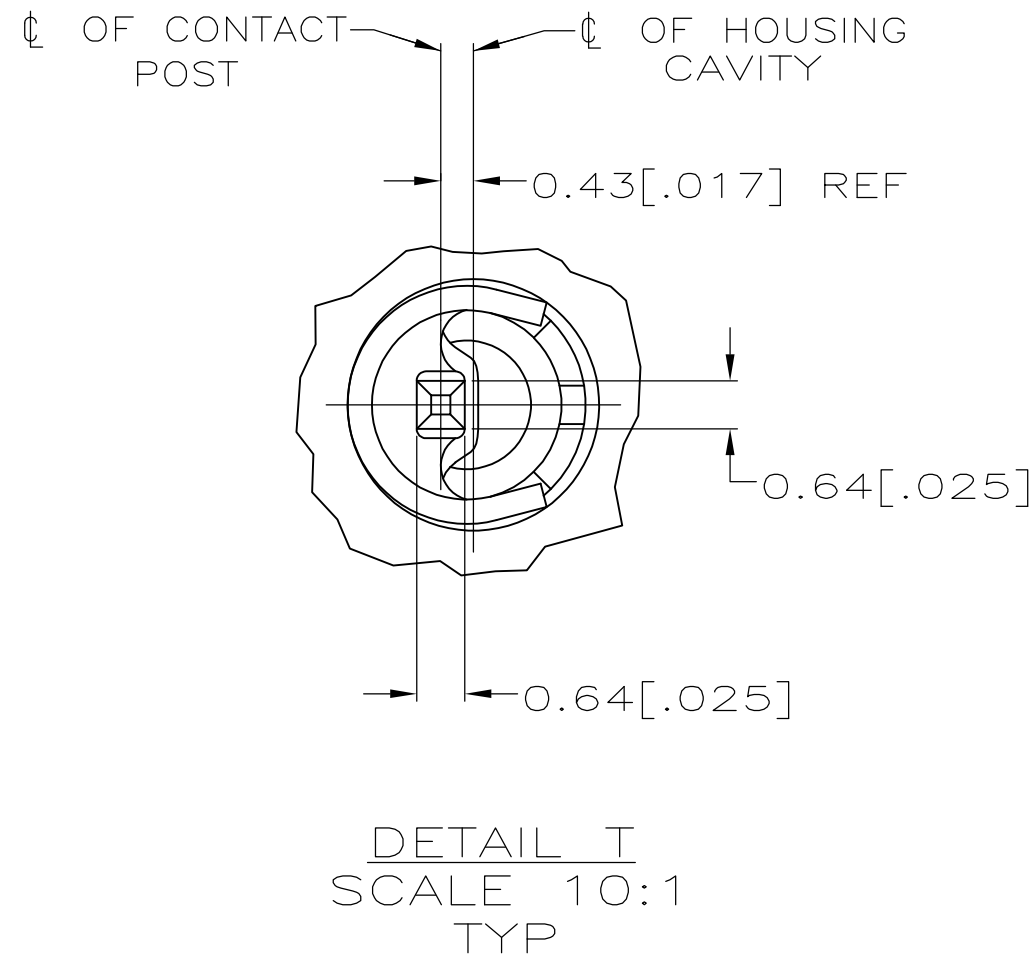
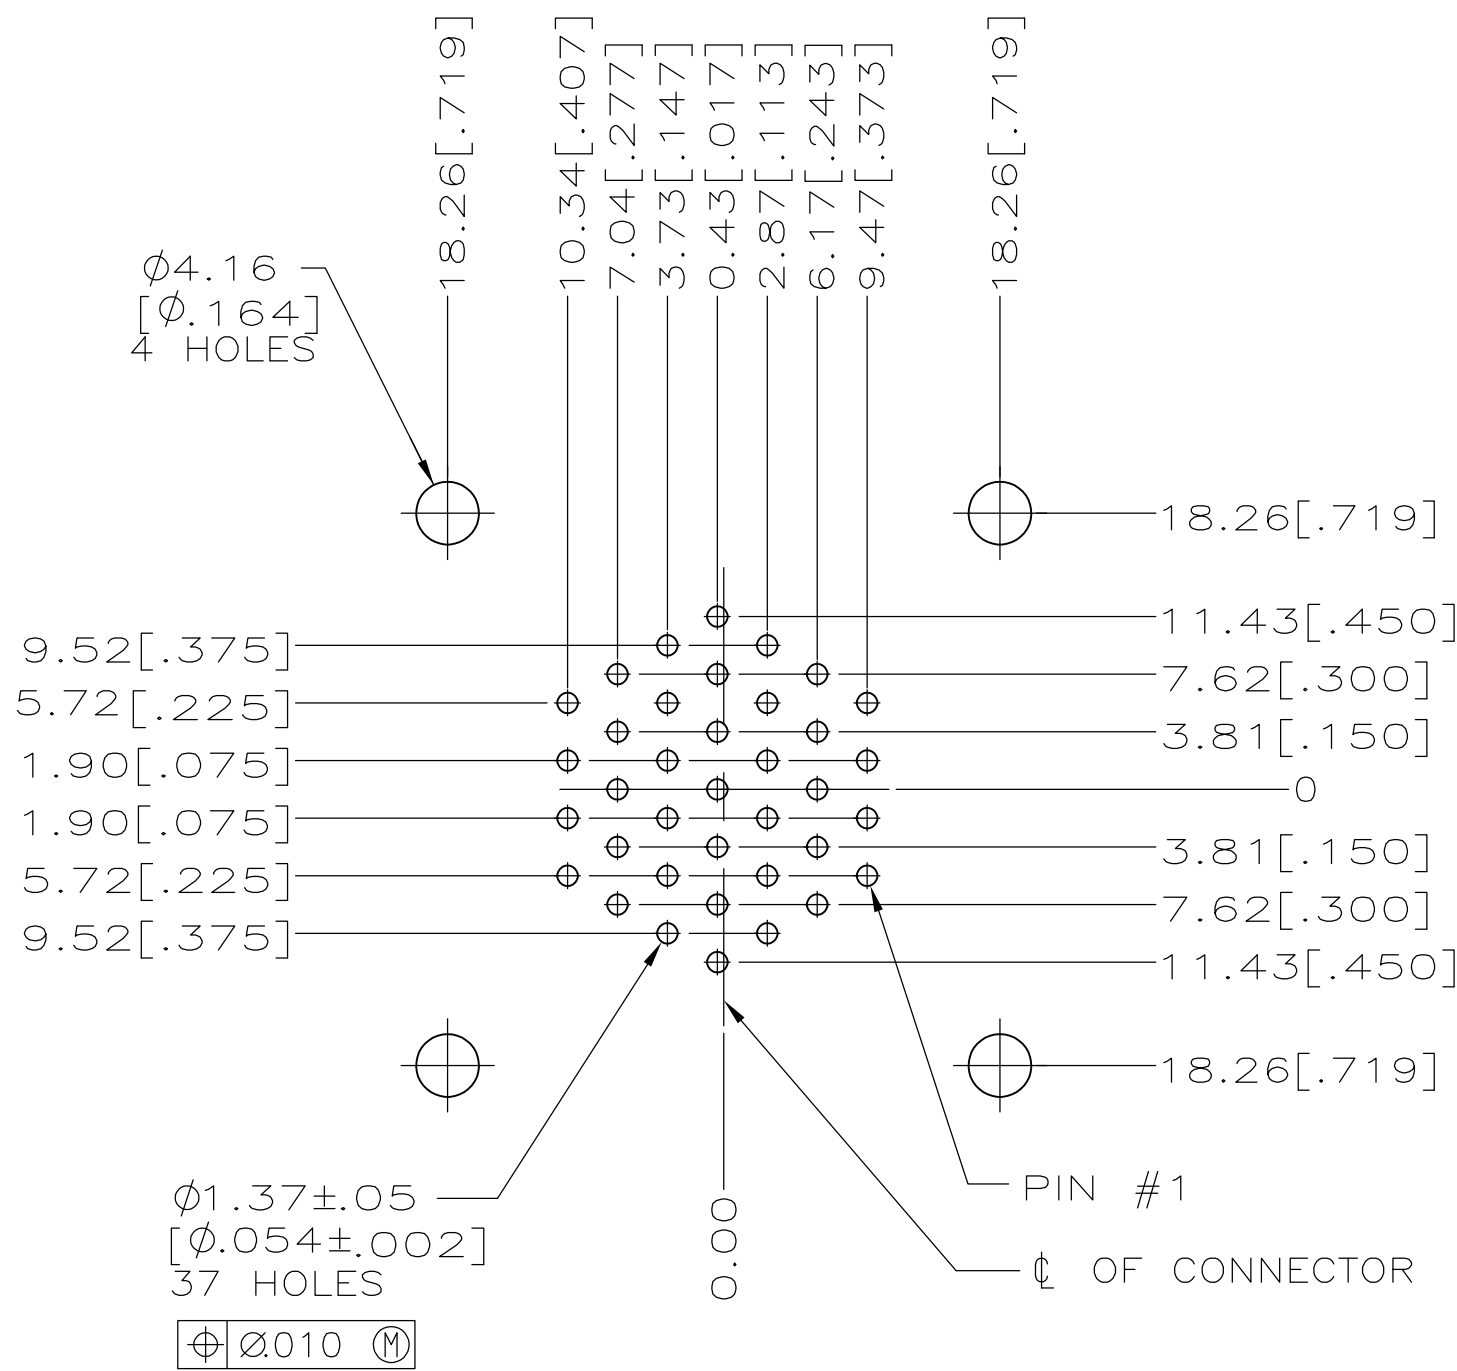
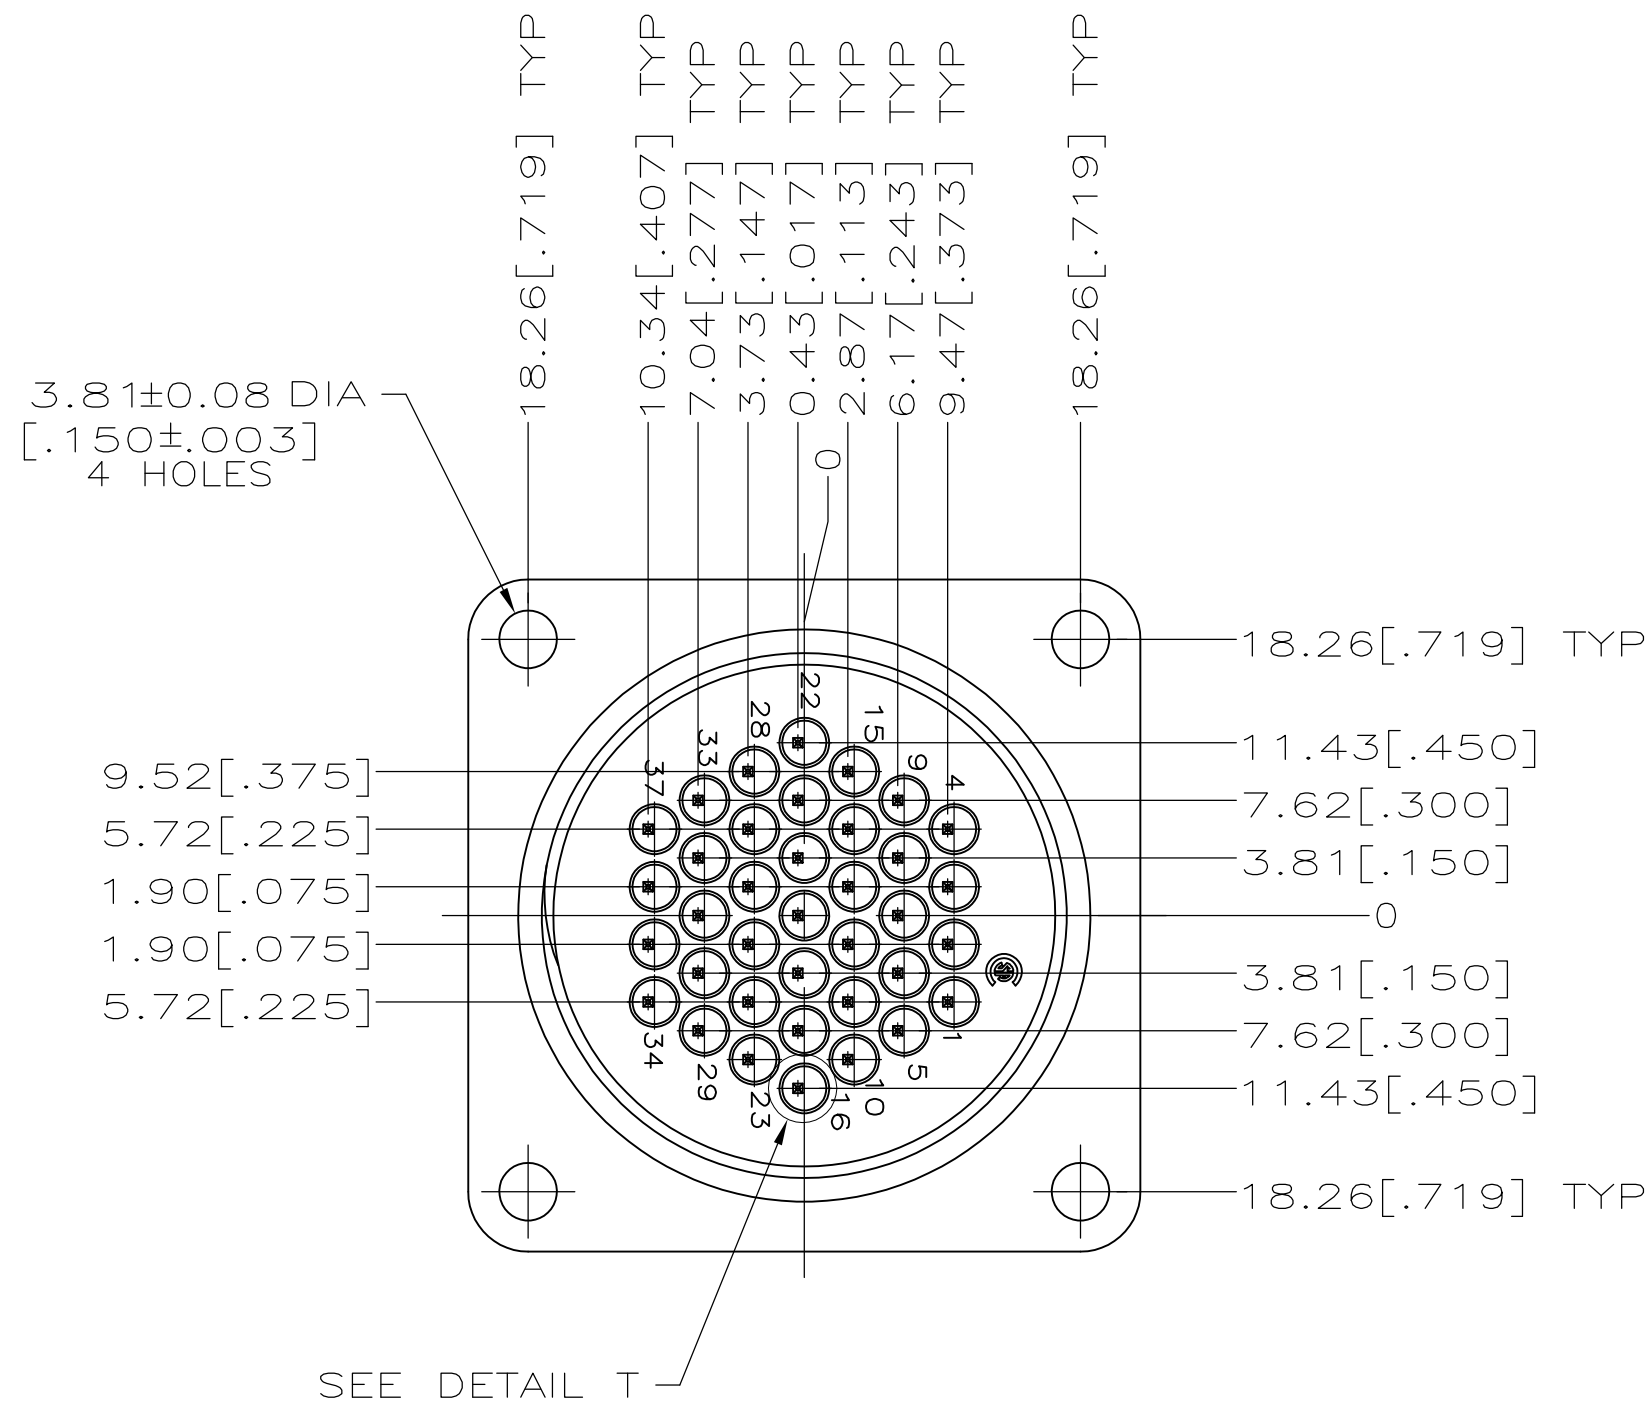
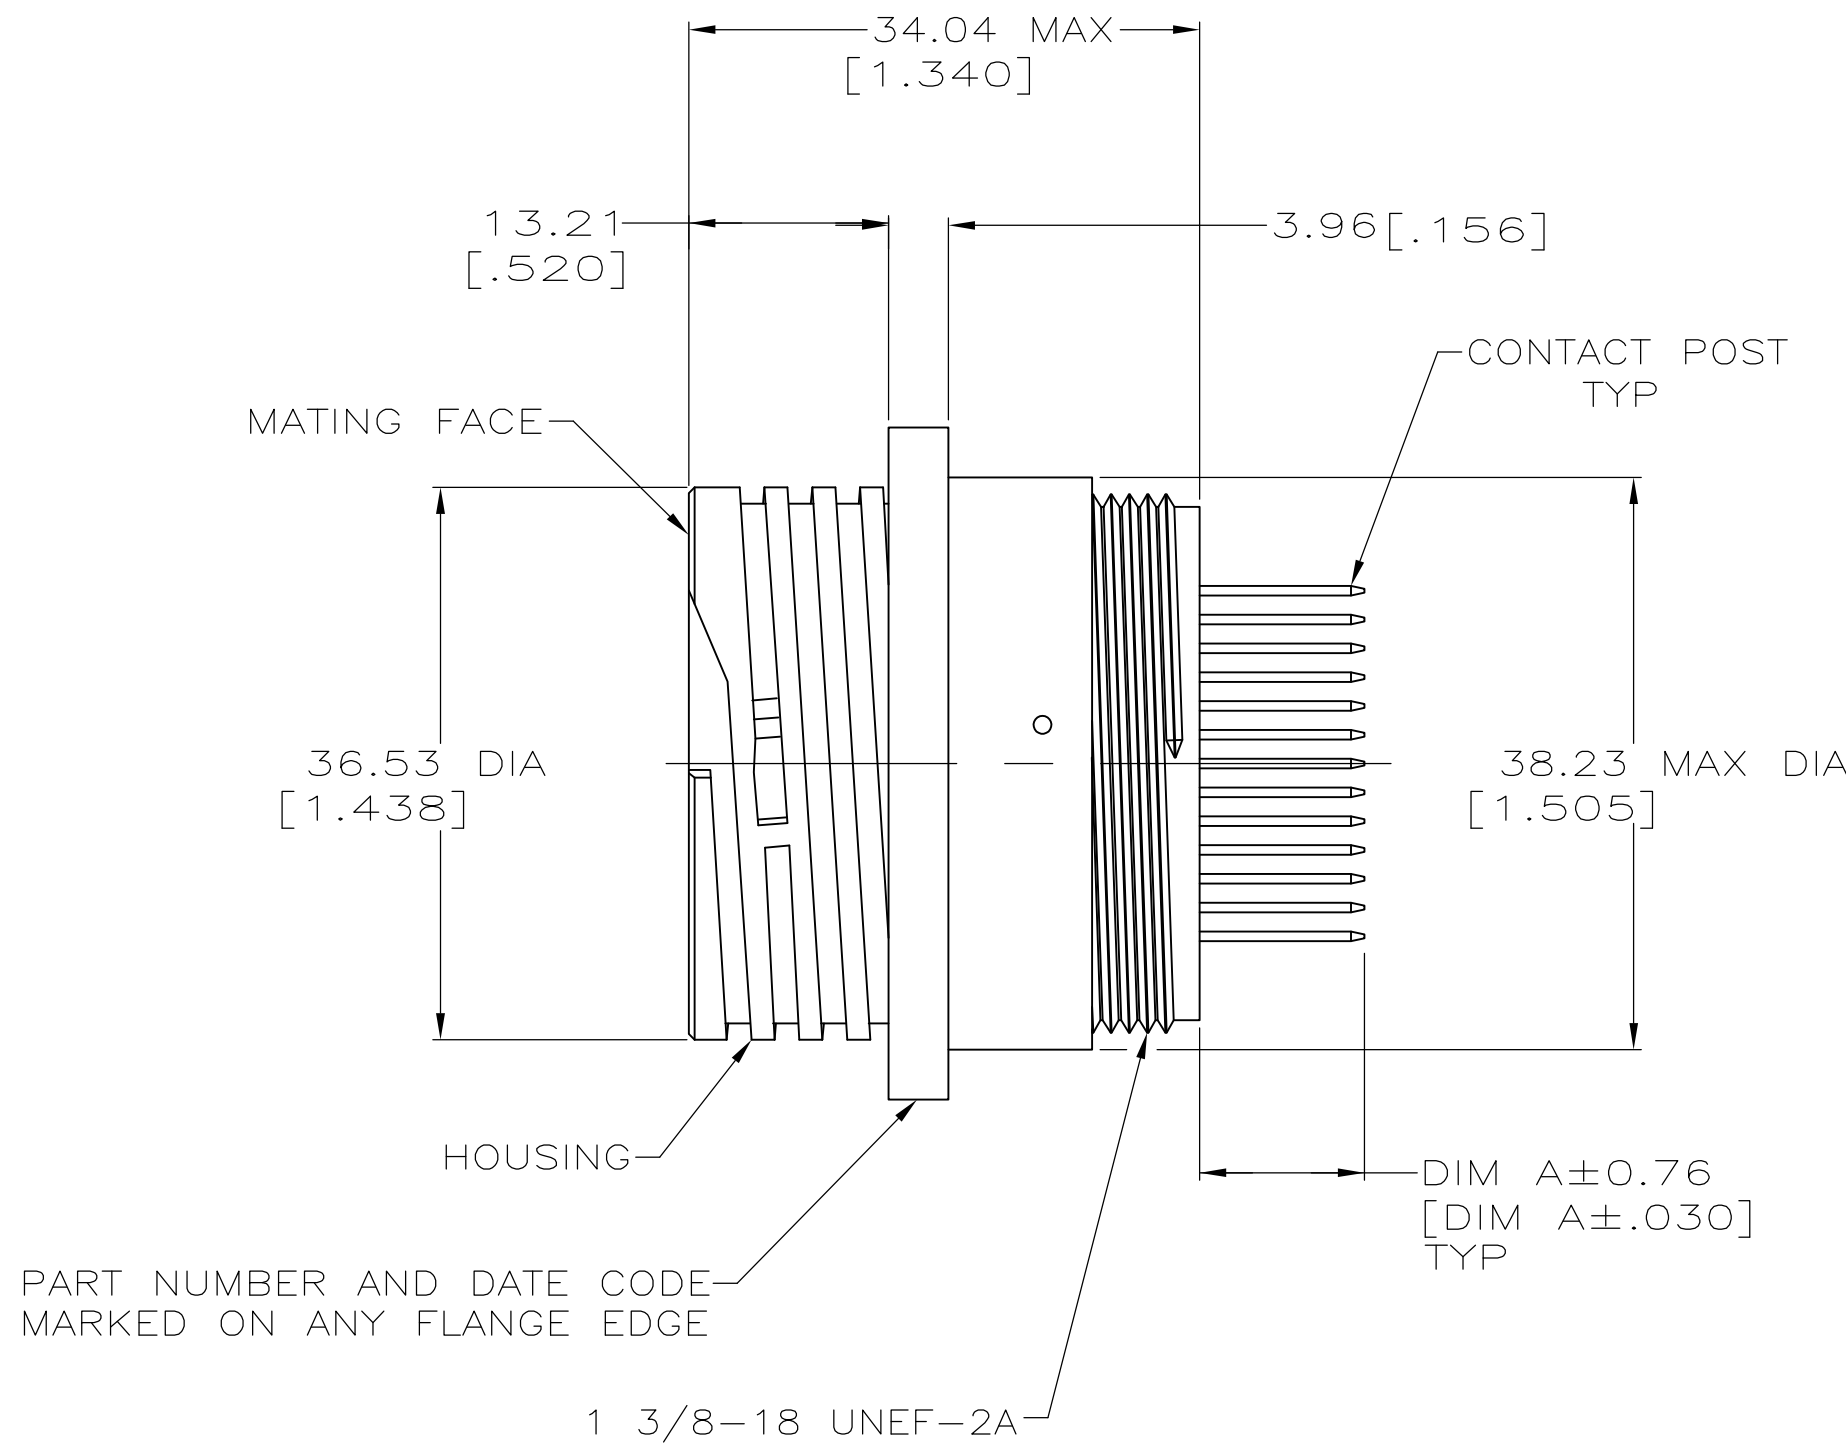


D

C

B

A

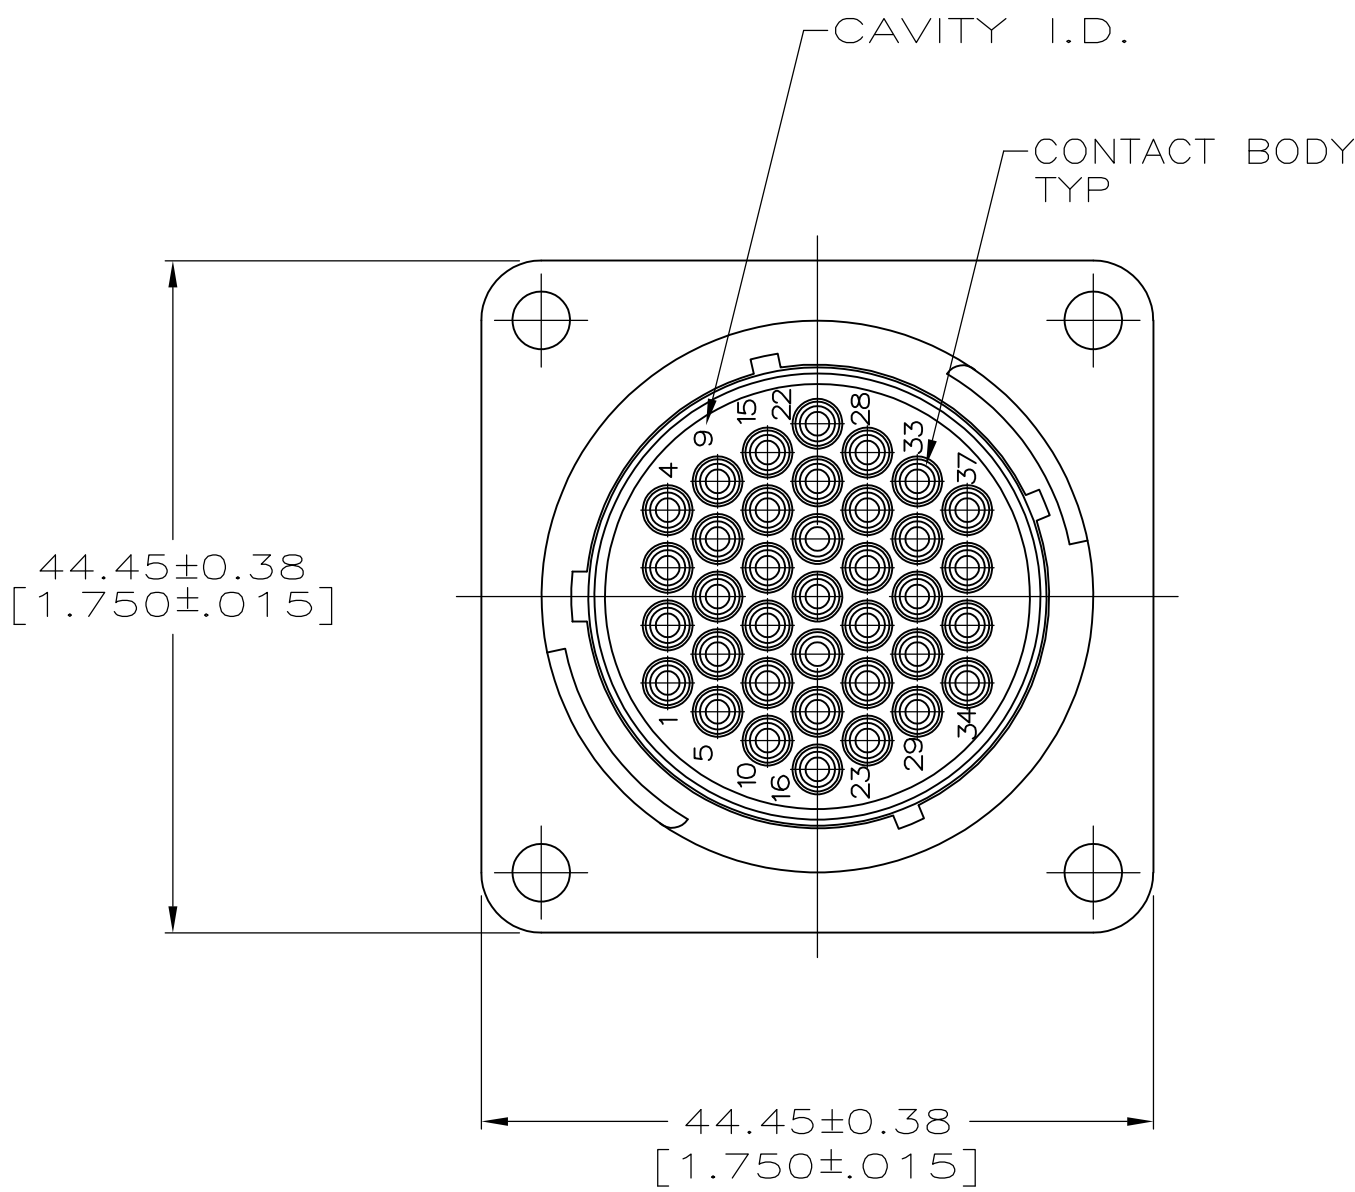

- 1 NYLON, UL 94V-0 RATED, BLACK.
- 2 STAINLESS STEEL.
- 3 BRASS.
- 4 CONTACT BODY: 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END. GOLD FLASH ON REMAINDER, BOTH OVER 1.27um [.000050] MIN NICKEL. CONTACT POST: 2.54um [.000100] MIN TIN-LEAD OVER 1.27um [.000050] MIN NICKEL.
- 5 RECOMMENDED PC BOARD HOLE SIZE FOR CONTACT POST = 1.02±0.08[.040±.003] DIA.
- 6 CONTACT BODY: 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END. GOLD FLASH ON REMAINDER, BOTH OVER 1.27um [.000050] MIN NICKEL. CONTACT POST: 2.54um [.000100] MIN TIN OVER 1.27um [.000050] MIN NICKEL.

6	5.59[.220]	213854-4
6	10.90[.429]	213854-3
4	5.59[.220]	213854-2
4	10.90[.429]	213854-1
FINISH	DIM A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN D.HARDY 01-03-95	TE Connectivity	
DIMENSIONS: mm [INCHES]	CHK R.STONE 01-09-95	NAME T.COULSON 01-10-95	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-10024		
0 PLC ± -	APPLICATION SPEC		
1 PLC ± -	SIZE		
2 PLC ± -	CAGE CODE		
3 PLC ± .005	DRAWING NO		
4 PLC ± -	RESTRICTED TO		
ANGLES ± -	WEIGHT		
MATERIAL: HOUSING: CONTACT SPRING: CONTACT BODY & POST:	A1 00779 213854		
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1 REV G1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[213854-3](#)