

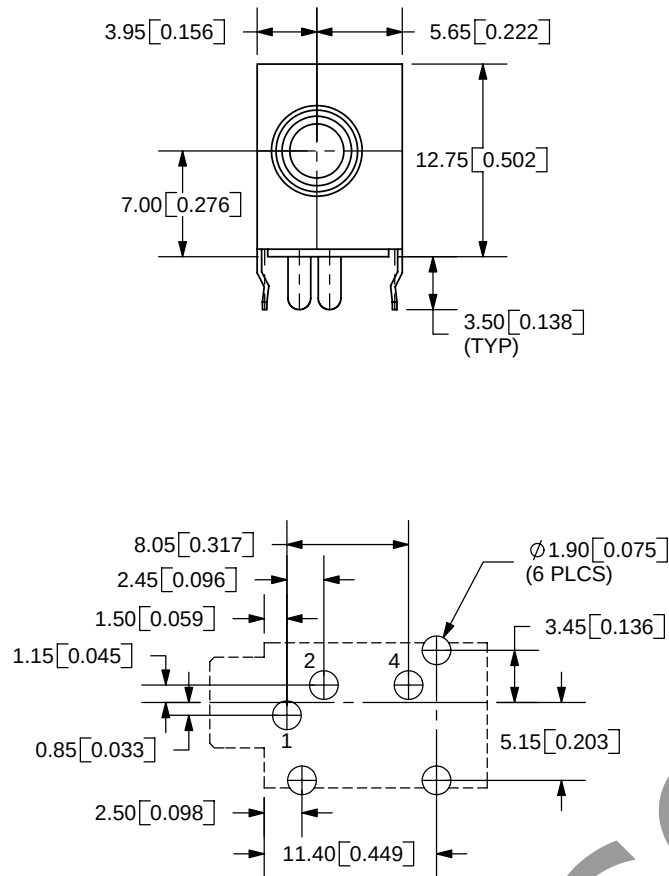



REV.	DESCRIPTION	DATE
A	NEW DRAWING	11/28/2005
B	Correction made to schematic	3/2/2006

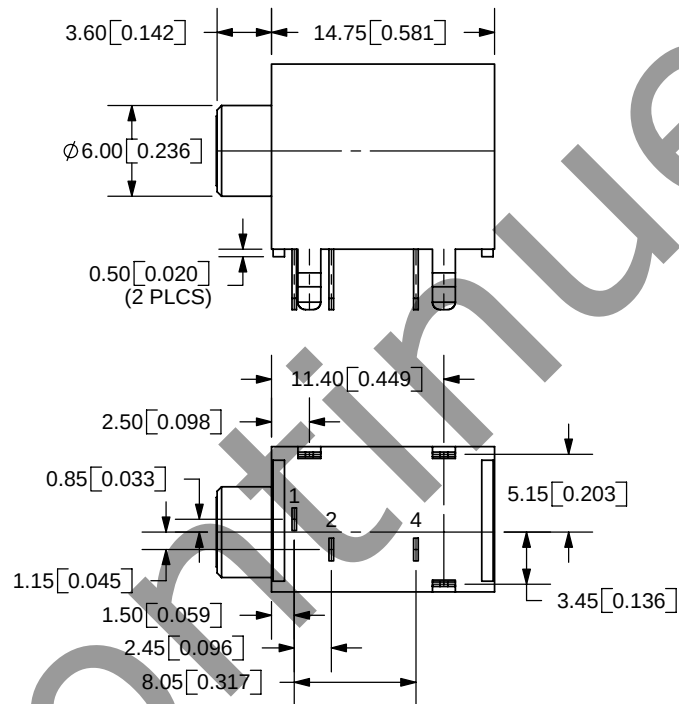

PCB LAYOUT
TOP VIEW

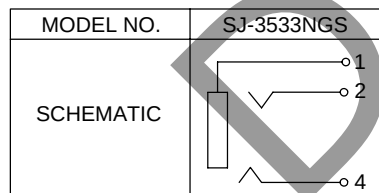

TOLERANCE:
X.X $\pm 0.2\text{mm}$
X.XX $\pm 0.1\text{mm}$
X.XXX $\pm 0.05\text{mm}$






CUI INC

9615 SW Allen Blvd., Ste. 103
Beaverton, OR 97005
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

	MATERIAL	PLATING
TERMINAL 1	Brass	Tin
TERMINAL 2	Brass	Tin
TERMINAL 4	Brass	Tin
BUSHING	Brass	Nickel
RING SPRING	SUS301	Nickel
TIP SPRING	SUS301	Nickel
SHIELD	Iron Plate	Tin
HOUSING	PBT	



 CUI INC	
9615 SW Allen Blvd., Ste. 103 Beaverton, OR 97005 Phone: 503-643-4899 800-275-4899 Fax: 503-372-1266 Website: www.cui.com	
TITLE: 3.5mm 5 PIN RIGHT ANGLE STEREO JACK	REV: B
PART NO. SJ-3533NGS	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 2:1

REV.	DESCRIPTION	DATE
A	NEW DRAWING	11/28/2005
B	Correction made to schematic	3/2/2006

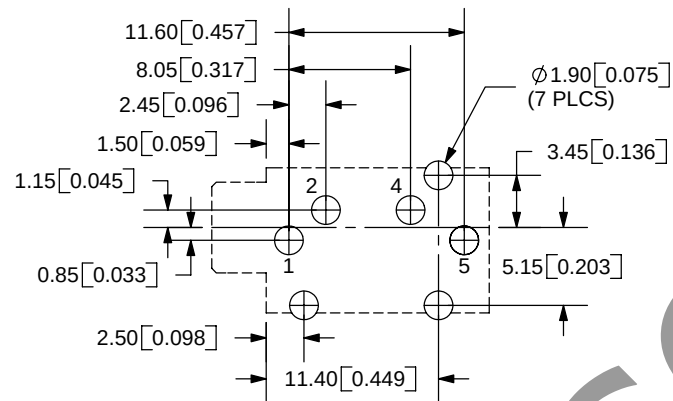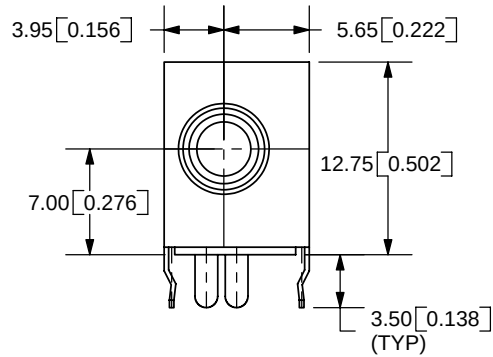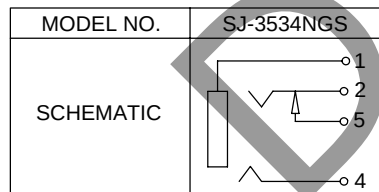PCB LAYOUT
TOP VIEW

PC FILE NAME:
SJ-3534NGS

COPYRIGHT 2005 BY CUI INC.

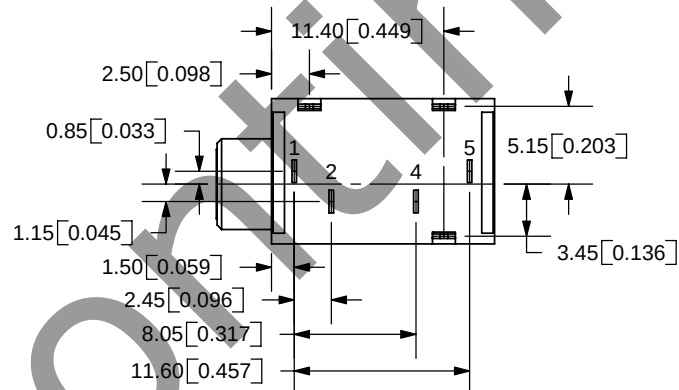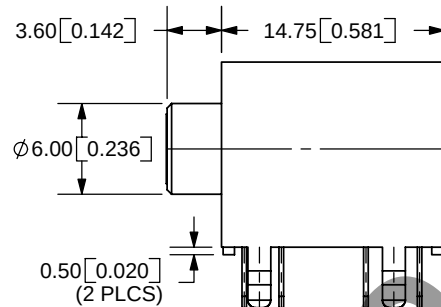

SPECIFICATIONS:

RATING: 16V DC @ 300mA

CONTACT RESISTANCE: 50m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN: 500V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm




**CUI INC**

9615 SW Allen Blvd., Ste. 103
Beaverton, OR 97005
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

	MATERIAL	PLATING
TERMINAL 1	Brass	Tin
TERMINAL 2	Brass	Tin
TERMINAL 4	Brass	Tin
TERMINAL 5	Brass	Tin
BUSHING	Brass	Nickel
RING SPRING	SUS301	Nickel
TIP SPRING	SUS301	Nickel
SHIELD	Iron Plate	Tin
HOUSING	PBT	



TITLE:	3.5mm 5 PIN RIGHT ANGLE STEREO JACK	REV:	B
PART NO.	SJ-3534NGS	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
		SCALE:	2:1

REV.	DESCRIPTION	DATE
A	NEW DRAWING	11/28/2005
B	Correction made to schematic	3/2/2006

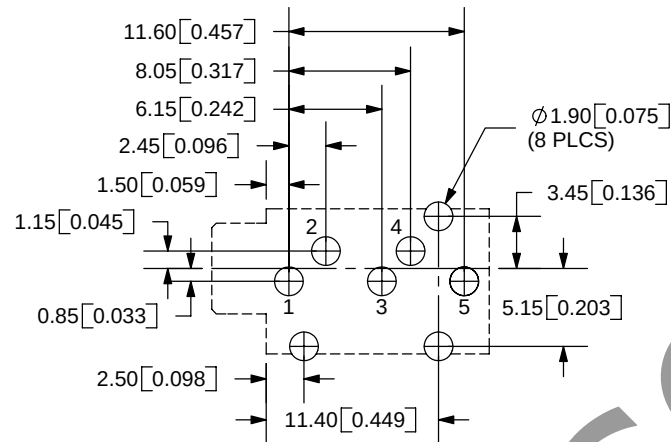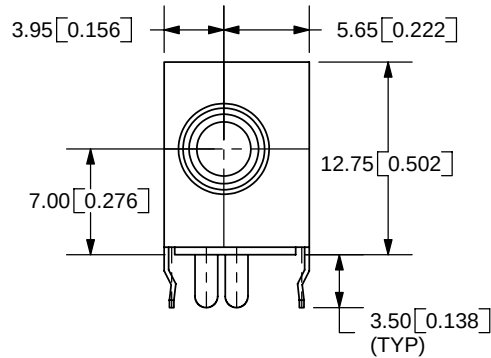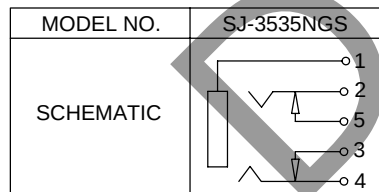PCB LAYOUT
TOP VIEW

PC FILE NAME:
SJ-3535NGS

COPYRIGHT 2005 BY CUI INC.

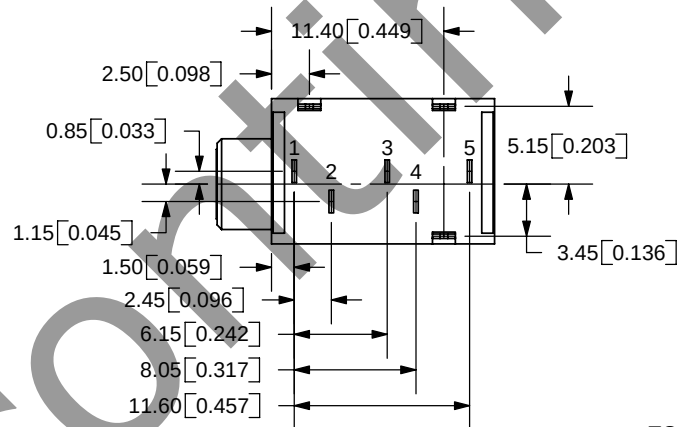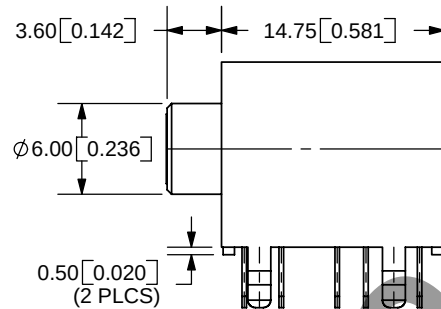

SPECIFICATIONS:


RATING: 16V DC @ 300mA

CONTACT RESISTANCE: 50m OHMS MAX

INSULATION RESISTANCE: 100M OHMS MIN: 500V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES



TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

**CUI INC**

9615 SW Allen Blvd., Ste. 103
Beaverton, OR 97005
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

	MATERIAL	PLATING
TERMINAL 1	Brass	Tin
TERMINAL 2	Brass	Tin
TERMINAL 3	Brass	Tin
TERMINAL 4	Brass	Tin
TERMINAL 5	Brass	Tin
BUSHING	Brass	Nickel
RING SPRING	SUS301	Nickel
TIP SPRING	SUS301	Nickel
SHIELD	Iron Plate	Tin
HOUSING	PBT	

TITLE:	3.5mm 5 PIN RIGHT ANGLE STEREO JACK	REV:	B
PART NO.	SJ-3535NGS	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
		SCALE:	2:1