




DASH NO	CONN TYPE
-1	BJ48GF
-2	UBJ48GF

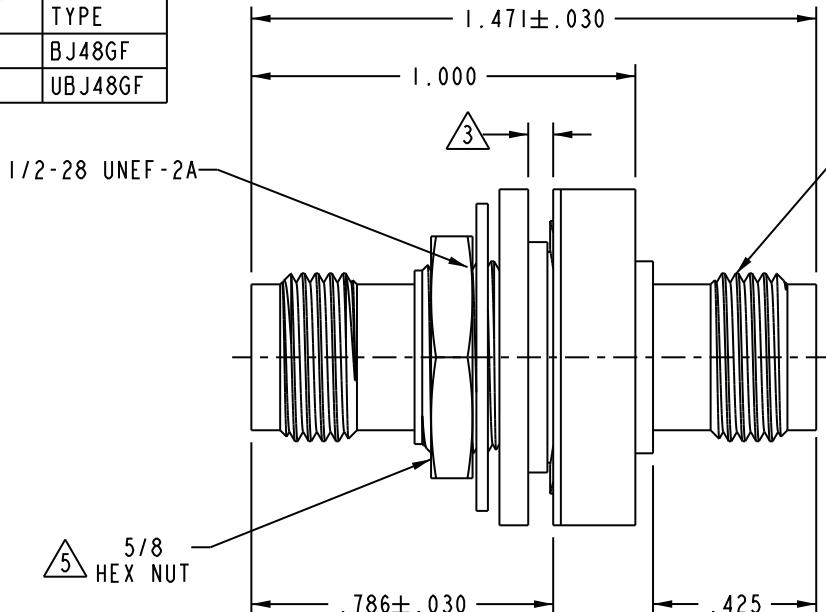

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EMERSON CONNECTIVITY SOLUTIONS AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION

REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
E	ECO 53753	10/19/11	CAA

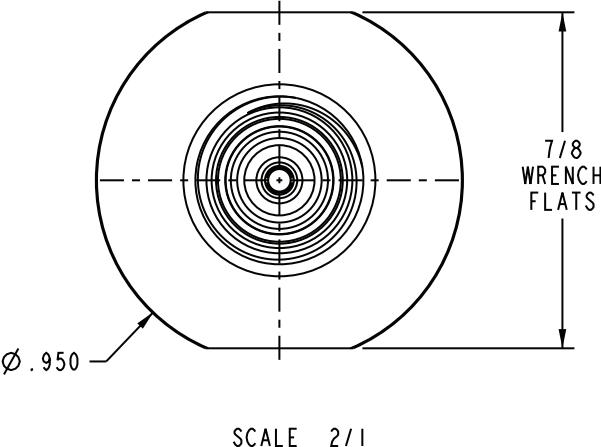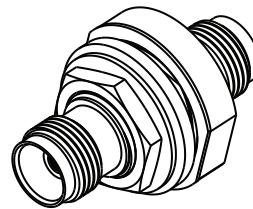

5 TIGHTEN TO 25 INCH-POUNDS MAXIMUM INSTALLATION TORQUE

4. FILTER FUNCTION BETWEEN SHIELD AND CHASSIS:

- (A) VOLTAGE RATING: 200 VDC AT SEA LEVEL AND 25° C
- (B) CAPACITANCE: 4nFD MINIMUM 10nFD MAXIMUM AT 1KHz AND 25° C
- (C) DISSIPATION FACTOR: 5% MAXIMUM AT 1 KHz AND 25° C
- (D) DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC AT SEA LEVEL AND 25° C FOR 1 MINUTE
- (E) INSULATION RESISTANCE: 1 G- OHM MINIMUM AT 200 VDC AND 25° C
- (F) RF INSERTION LOSS (FILTER PERFORMANCE) : WHEN MEASURED PER MIL-STD-220 ON A SWEEP FREQUENCY RESPONSE BASIS (WITH 1/2 AMP DRIVEN CURRENT IN 50 OR 75 OHM) INSERTION LOSS SHALL BE AS FOLLOWS:

FREQUENCY (MHZ)	(ATTENUATION MINIMUM dB AT 25° C)
1	1
3	2
10	8
30	16
100	30
300	30
1000	30

3 MAXIMUM PANEL THICKNESS .094

2. FINISH: TFS-1A (NICKEL)

1. 50 & 75 OHM BNC COAXIAL BULKHEAD MOUNT FEED THRU RECEPTACLE WITH GROUND FILTERING CAPACITOR


NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.

DRW	BPK	10/24/11	MATERIAL:	TITLE:	
N/A	CHK	10/19/11			
	CAA				
BLANK LENGTH (REF. ONLY)	QUALITY		FINISH:		
	MANUF				
N/A	APPROVED				
SURFACE AREA	PROBE FILE NO.	1-0485	DO NOT SCALE DWG	SIZE A	CAGE CODE 14949 DRAWING NO. 1-0485 REV. E
			SCALE 2/1	DATE 5/28/86	SHEET 1 OF 2



Cinch Connectivity Solutions
299 Johnson Ave. Ste. 100
Waseca, MN 56093
1-800-247-8256

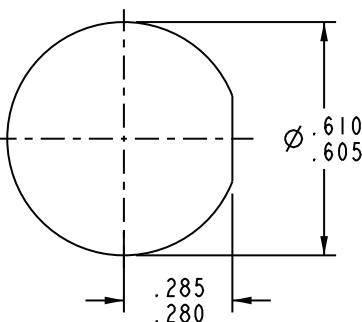

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[UBJ48GF](#)