

UNCONTROLLED DOCUMENT

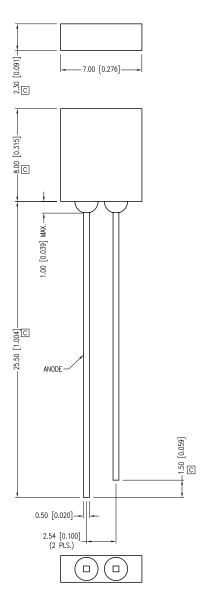



PART NUMBER	SSL-LX25783GD	REV.	О
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
09.23.92	CHG'D PEAK WAVELENGTH.		Α
03.06.95	UPDATED SPECS.		В
01.10.01	E.C.N. #10702.		C
06.01.11	F.C.N. #10BRDR. & REDRAWN.		D

ELECTRO-OPTICAL CHAR	ACTERISTICS TA	=25°C	If= 20mA		
PARAMETER	MIN	TYP.	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		2.0	2.8	Vf	
REVERSE VOLTAGE	5.0			Vr	lr=100μA
axial intensity		9		mcd	If=20mA
VIEWING ANGLE		110		2x theta	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN DIF	FUSED			

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.2	mW/*C
OPERATING TEMP.	-40 TO +85	. C
STORAGE TEMP.	-40 TO +85	•c
SOLDERING TEMP.	+260	.C
2.0mm FROM BODY	3	SEC. MAX.
4.1.40.0		

* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.00}$ PRECISION MAX.= $^{+0.00}_{-0.000}$ MAX.= $^{+0.00}_{-0.000}$ PRECISION ARE: X=±1 (±0.039), X.XX=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.000}$ PRECISION MAX.= $^{+0.000}_{-0.000}$ PRECISION MA DATE: 06.01.11 DRAWN BY:

Creating LED and LCD Solutions Together™

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

WEB: WWW.LUMEX.COM

2.3mm x 8mm RECTANGULAR LED 565nm GREEN GREEN DIFFUSED LENS

THE INFORMATION KEEP ALI

2.5HIH X SHIH RECTARGULAR ELD, SUSHIH GREEN, GREEN DIFFUSED EENS.				
THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.		1 OF 1	CHKD BY:	ВС
CONFIDENTIAL INFORMATION ON CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL		NTS	APRVD BY:	KF
N CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF COMENTING. EXCEPT AS SPECIFICALLY AUTHORIZED IN WINTING BY COMEN INC., THE PICILER OF THIS DOCUMENT SHALL ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.		mm [INCH]	P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX25783GD