


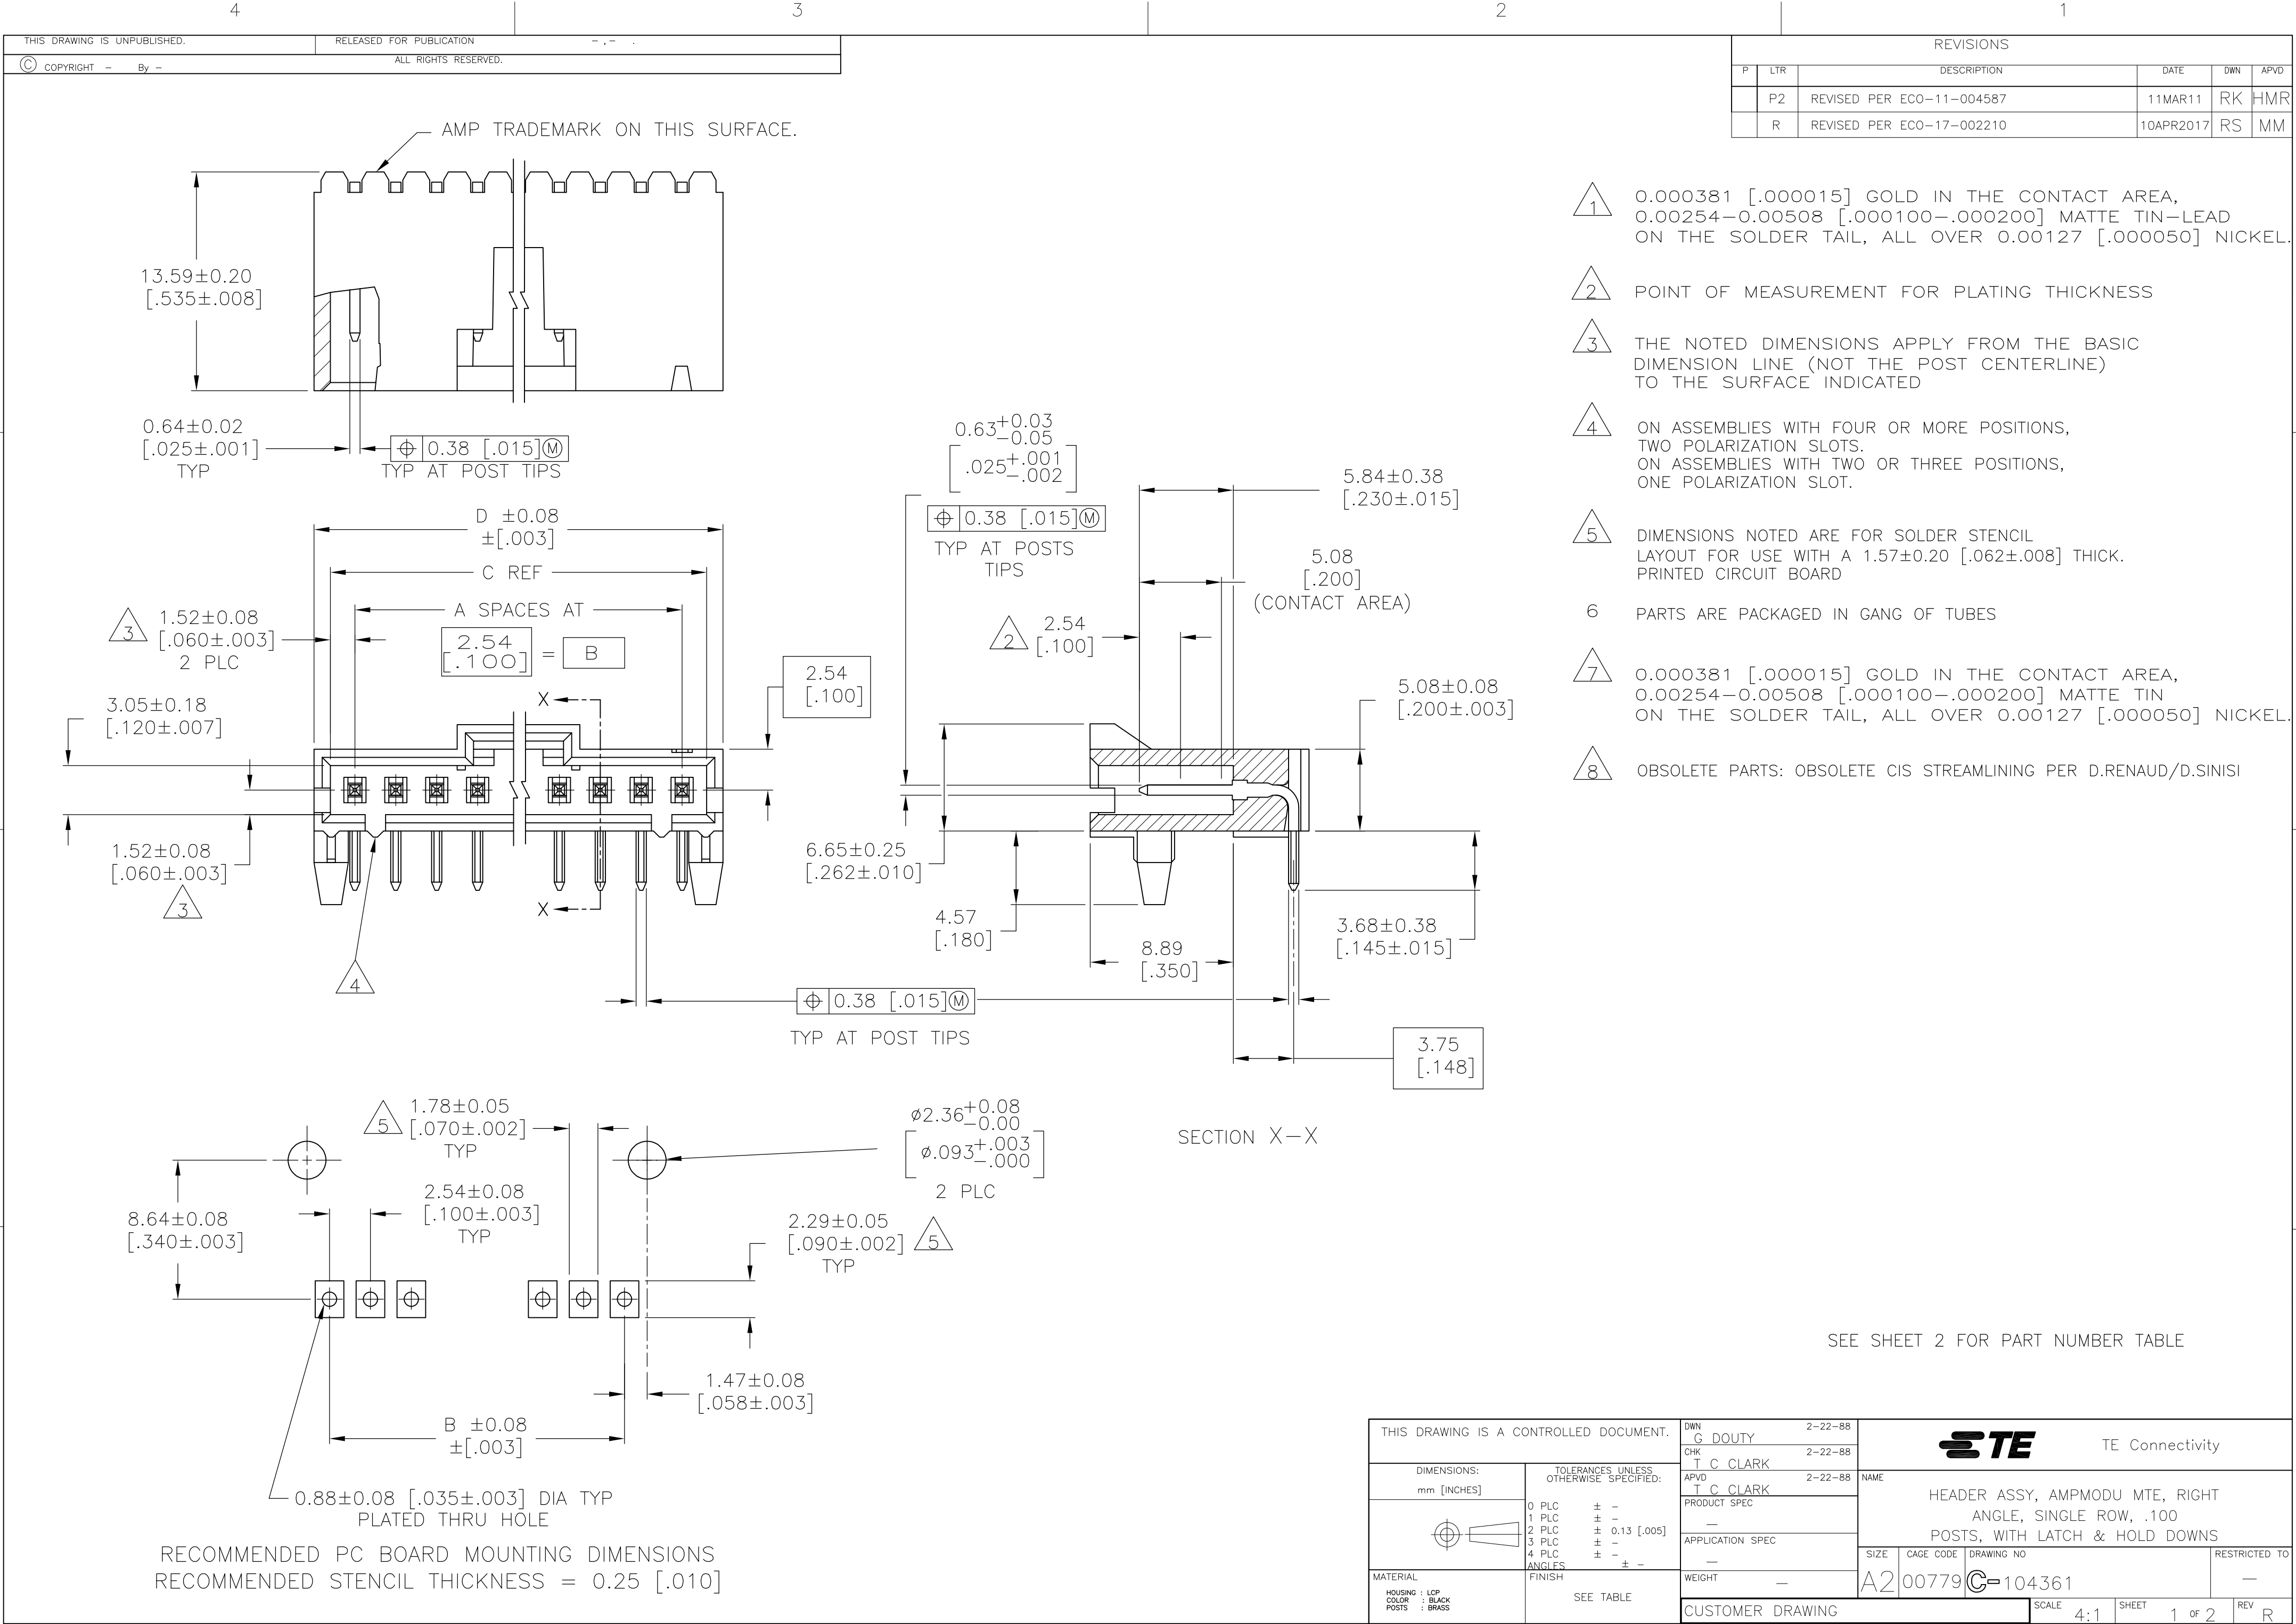

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P2	REVISED PER ECO-11-004587	11MAR11	RK	HMR
	R	REVISED PER ECO-17-002210	10APR2017	RS	MM

- 1 0.000381 [.000015] GOLD IN THE CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3 THE NOTED DIMENSIONS APPLY FROM THE BASIC DIMENSION LINE (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED
- 4 ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS. ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
- 5 DIMENSIONS NOTED ARE FOR SOLDER STENCIL LAYOUT FOR USE WITH A 1.57±0.20 [.062±.008] THICK. PRINTED CIRCUIT BOARD
- 6 PARTS ARE PACKAGED IN GANG OF TUBES
- 7 0.000381 [.000015] GOLD IN THE CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON THE SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SEE SHEET 2 FOR PART NUMBER TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 2-22-88 G DOUTY	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK 2-22-88 T C CLARK			
		APVD 2-22-88 T C CLARK	NAME		
		PRODUCT SPEC	HEADER ASSY, AMPMODU MTE, RIGHT ANGLE, SINGLE ROW, .100 POSTS, WITH LATCH & HOLD DOWNS		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
0 PLC ± -		—	A2	00779	C=104361
1 PLC ± -		—	RESTRICTED TO		
2 PLC ± 0.13 [.005]		—	—		
3 PLC ± -		—	—		
4 PLC ± -		—	—		
ANGLES ± -		—	—		
FINISH		WEIGHT	SCALE	SHEET	REV
SEE TABLE		—	4:1	1 OF 2	R
MATERIAL HOUSING : LCP COLOR : BLACK POSTS : BRASS		CUSTOMER DRAWING			

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

	65.91 [2.595]	64.01 [2.520]	60.96 [2.400]	24	25	7-104361-4
	63.37 [2.495]	61.47 [2.420]	58.42 [2.300]	23	24	7-104361-3
	60.83 [2.395]	58.93 [2.320]	55.88 [2.200]	22	23	7-104361-2
	58.29 [2.295]	56.39 [2.220]	53.34 [2.100]	21	22	7-104361-1
	55.75 [2.195]	53.85 [2.120]	50.8 [2.000]	20	21	7-104361-0
	53.21 [2.095]	51.31 [2.020]	48.26 [1.900]	19	20	6-104361-9
	50.67 [1.995]	48.77 [1.920]	45.72 [1.800]	18	19	6-104361-8
	48.13 [1.895]	46.23 [1.820]	43.18 [1.700]	17	18	6-104361-7
	45.59 [1.795]	43.69 [1.720]	40.64 [1.600]	16	17	6-104361-6
	43.05 [1.695]	41.15 [1.620]	38.1 [1.500]	15	16	6-104361-5
	40.51 [1.595]	38.61 [1.520]	35.56 [1.400]	14	15	6-104361-4
	37.97 [1.495]	36.07 [1.420]	33.02 [1.300]	13	14	6-104361-3
	35.43 [1.395]	33.53 [1.320]	30.48 [1.200]	12	13	6-104361-2
	32.89 [1.295]	30.99 [1.220]	27.94 [1.100]	11	12	6-104361-1
	30.35 [1.195]	28.45 [1.120]	25.4 [1.000]	10	11	6-104361-0
	27.81 [1.095]	25.91 [1.020]	22.86 [.900]	9	10	5-104361-9
	25.27 [.995]	23.37 [.920]	20.32 [.800]	8	9	5-104361-8
	22.73 [.895]	20.83 [.820]	17.78 [.700]	7	8	5-104361-7
	20.19 [.795]	18.29 [.720]	15.24 [.600]	6	7	5-104361-6
	17.65 [.695]	15.75 [.620]	12.7 [.500]	5	6	5-104361-5
	15.11 [.595]	13.21 [.520]	10.16 [.400]	4	5	5-104361-4
	12.57 [.495]	10.67 [.420]	7.62 [.300]	3	4	5-104361-3
	10.03 [.395]	8.13 [.320]	5.08 [.200]	2	3	5-104361-2
	7.49 [.295]	5.59 [.220]	2.54 [.100]	1	2	5-104361-1
	65.91 [2.595]	64.01 [2.520]	60.96 [2.400]	24	25	2-104361-4
	63.37 [2.495]	61.47 [2.420]	58.42 [2.300]	23	24	2-104361-3
	60.83 [2.395]	58.93 [2.320]	55.88 [2.200]	22	23	2-104361-2
	58.29 [2.295]	56.39 [2.220]	53.34 [2.100]	21	22	2-104361-1
	55.75 [2.195]	53.85 [2.120]	50.8 [2.000]	20	21	2-104361-0
	53.21 [2.095]	51.31 [2.020]	48.26 [1.900]	19	20	1-104361-9
	50.67 [1.995]	48.77 [1.920]	45.72 [1.800]	18	19	1-104361-8
	48.13 [1.895]	46.23 [1.820]	43.18 [1.700]	17	18	1-104361-7
	45.59 [1.795]	43.69 [1.720]	40.64 [1.600]	16	17	1-104361-6
	43.05 [1.695]	41.15 [1.620]	38.1 [1.500]	15	16	1-104361-5
	40.51 [1.595]	38.61 [1.520]	35.56 [1.400]	14	15	1-104361-4
	37.97 [1.495]	36.07 [1.420]	33.02 [1.300]	13	14	1-104361-3
	35.43 [1.395]	33.53 [1.320]	30.48 [1.200]	12	13	1-104361-2</

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G DOUTY 2--22--88 CHK T C CLARK 2--22--88 APVD T C CLARK 2--22--88		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HEADER ASSY, AMPMODU MTE, RIGHT ANGLE, SINGLE ROW, .100 POSTS, WITH LATCH & HOLD DOWNS	
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -			
MATERIAL HOUSING : LCP COLOR : BLACK POSTS : BRASS		FINISH SEE TABLE			
		PRODUCT SPEC —		SIZE A2	
		APPLICATION SPEC —		CAGE CODE 00779	
		WEIGHT —		DRAWING NO C-104361	
		CUSTOMER DRAWING		RESTRICTED TO —	
				SCALE 4:1	
				SHEET 2 of 2	
				REV R	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-104361-5](#)