

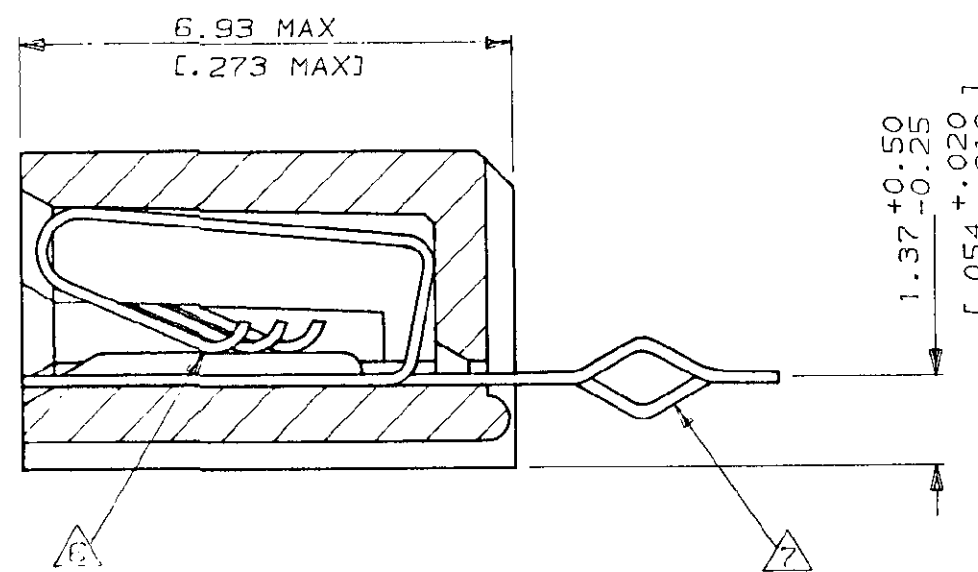


520315
METRIC
30° ANGLE PROJECTION

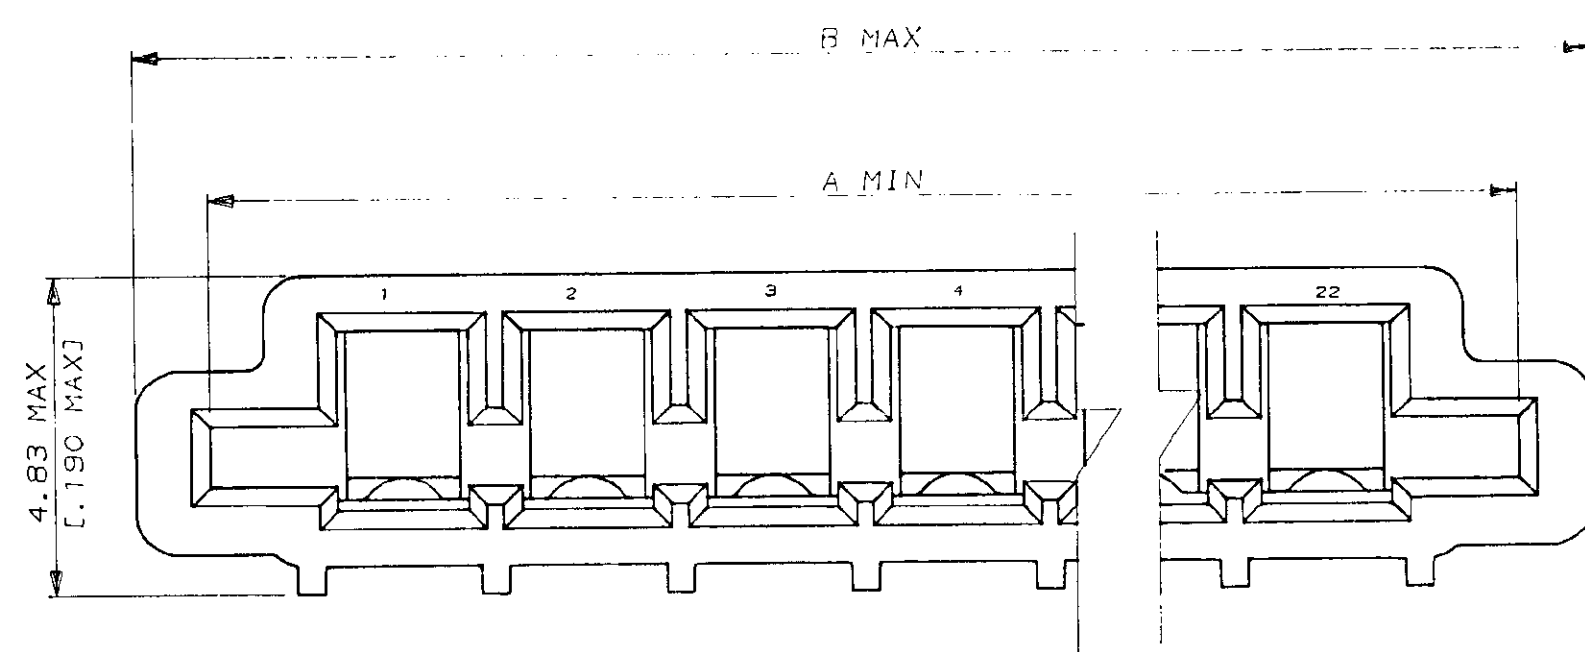

NOTES

- 1 MATERIAL
HOUSING : GLASS REINFORCED POLYESTER
THERMOPLASTIC UL 94 V0 RATED, BLACK
CONTACT : PHOS BRONZE
- 2 CONTACTS, MATTE TIN PLATED
- 3 CONNECTOR WILL ACCEPT FLEXIBLE PRINTED CIRCUIT OR FLAT FLEXIBLE CABLE ON 2.54 [1.00] CENTERS IN A THICKNESS RANGE OF 0.127 TO 0.381 [0.005 TO .015] IN CONTACT AREA
- 4 STAND-OFFS PREVENT SOLVENT ENTRAPMENT
- 5 LEAD-IN ON PINS FOR EASE OF INSERTION INTO BOARD
- 6 SEQUENTIAL CONTACTS REDUCE CABLE INSERTION FORCE
- 7 ALTERNATING CONTACT FORM RETAINS CONNECTOR IN P.C. BOARD DURING SOLDER OPERATION
- 8 ACCEPTS CABLE OR CIRCUITRY WITH EXPOSED CONDUCTORS FACING TOWARD OR AWAY FROM THE BOARD SURFACE
- 9 REFER TO APPLICATION SPEC 114-2062
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

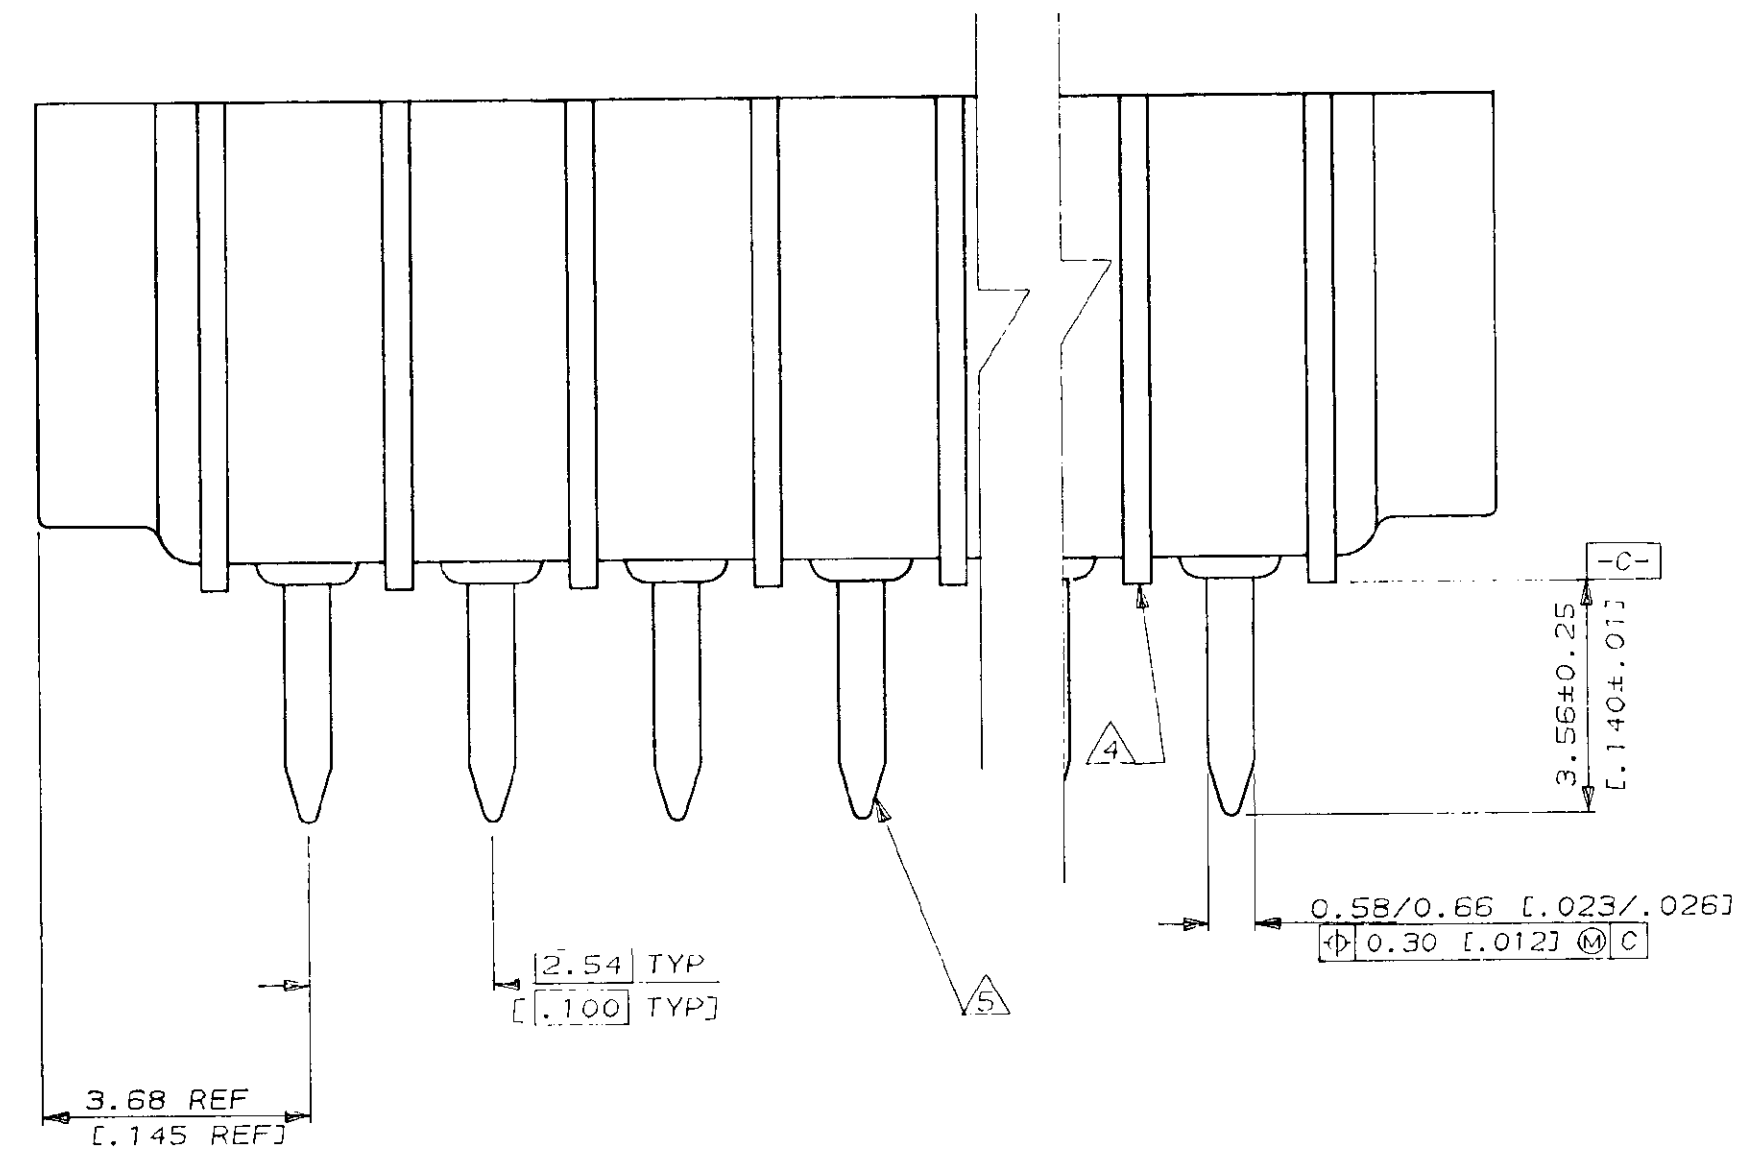

LEAD FREE							SUPERSEDED	
	OBSOLETE	7- 520315-2	60.78 [2.393]	58.62 [2.308]	22		2-520315-2	
10	OBSOLETE	7- 520315-1	58.24 [2.293]	56.08 [2.208]	21		2-520315-1	
		7- 520315-0	55.70 [2.193]	53.54 [2.108]	20		2-520315-0	
		6- 520315-9	53.16 [2.093]	51.00 [2.008]	19		1-520315-9	
10	OBSOLETE	6- 520315-8	50.62 [1.993]	48.46 [1.908]	18		1-520315-8	
	OBSOLETE	6- 520315-7	48.08 [1.893]	45.92 [1.808]	17		1-520315-7	
		6- 520315-6	45.54 [1.793]	43.38 [1.708]	16		1-520315-6	
		6- 520315-5	43.00 [1.693]	40.84 [1.608]	15		1-520315-5	
		6- 520315-4	40.46 [1.593]	38.30 [1.508]	14		1-520315-4	
		6- 520315-3	37.92 [1.493]	35.76 [1.408]	13		1-520315-3	
		6- 520315-2	35.38 [1.393]	33.22 [1.308]	12		1-520315-2	
		6- 520315-1	32.84 [1.293]	30.68 [1.208]	11		1-520315-1	
		6- 520315-0	30.30 [1.193]	28.14 [1.108]	10		1-520315-0	
		5- 520315-9	27.76 [1.093]	25.60 [1.008]	9		520315-9	
		5- 520315-8	25.22 [.993]	23.06 [.908]	8		520315-8	
		5- 520315-7	22.68 [.893]	20.52 [.808]	7		520315-7	
		5- 520315-6	20.14 [.793]	17.98 [.708]	6		520315-6	
		5- 520315-5	17.60 [.693]	15.44 [.608]	5		520315-5	
		5- 520315-4	15.06 [.593]	12.90 [.508]	4		520315-4	
		5- 520315-3	12.52 [.493]	10.36 [.408]	3		520315-3	
		5- 520315-2	9.98 [.393]	7.82 [.308]	2		520315-2	
		PART NO	B	A	POS	PART NO		

U4 ECR-10-022530 KK HMR 07FEB11

U3 REV PER ECO-10-000445 KK AEG 12JAN10

U2 REVISED ECR-06-004332 PM KS 21FEB06

U1 REVISED FR00-0002-05 SD PCH 22DEC04

U REVISED FR00-0011-04 SD PCH 09FEB04

T REVISED DY/EC/ 0799 LWY SL 18.7.99

S REDRAHN DY/EC/0682 RT LHM 12.4.83

LTR (REVISION RECORD) DR CHK DATE

Copyright ©1993 TE MFG (S) PTE LTD. ALL RIGHTS RESERVED.

Copyright ©1993 TE MFG (S) PTE LTD. ALL RIGHTS RESERVED.

(WIRE RANGE) mm² (AWG -)

(INSULATION DIA.) mm

(NAME) TRIO-MATE

(MATERIAL) DR. ROWENA

(FINISH) DE. A. SOH

(GENERAL TOLERANCE) ±.38 [±.015]

SIZE A2 DY

LOC (No.)

VERTICAL CABLE ENTRY FOR 1.57 [.062] THK P.C. BOARD

SCALE 10:1

REV. U4

SHEET 1 OF 1

TE Connectivity

(CUSTOMER DRAWING)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-520315-9](#)