

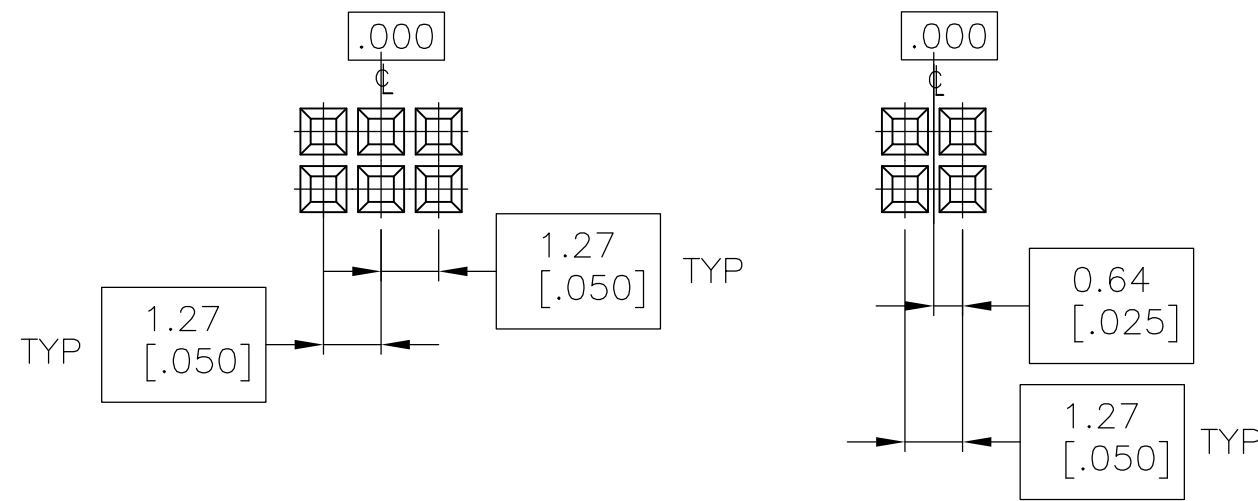


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		M	EC 0G3C 0698 04	30NOV04	BSV	DLS
			M1	REVISED PER ECO-09-020689	31AUG09	KK	AEG

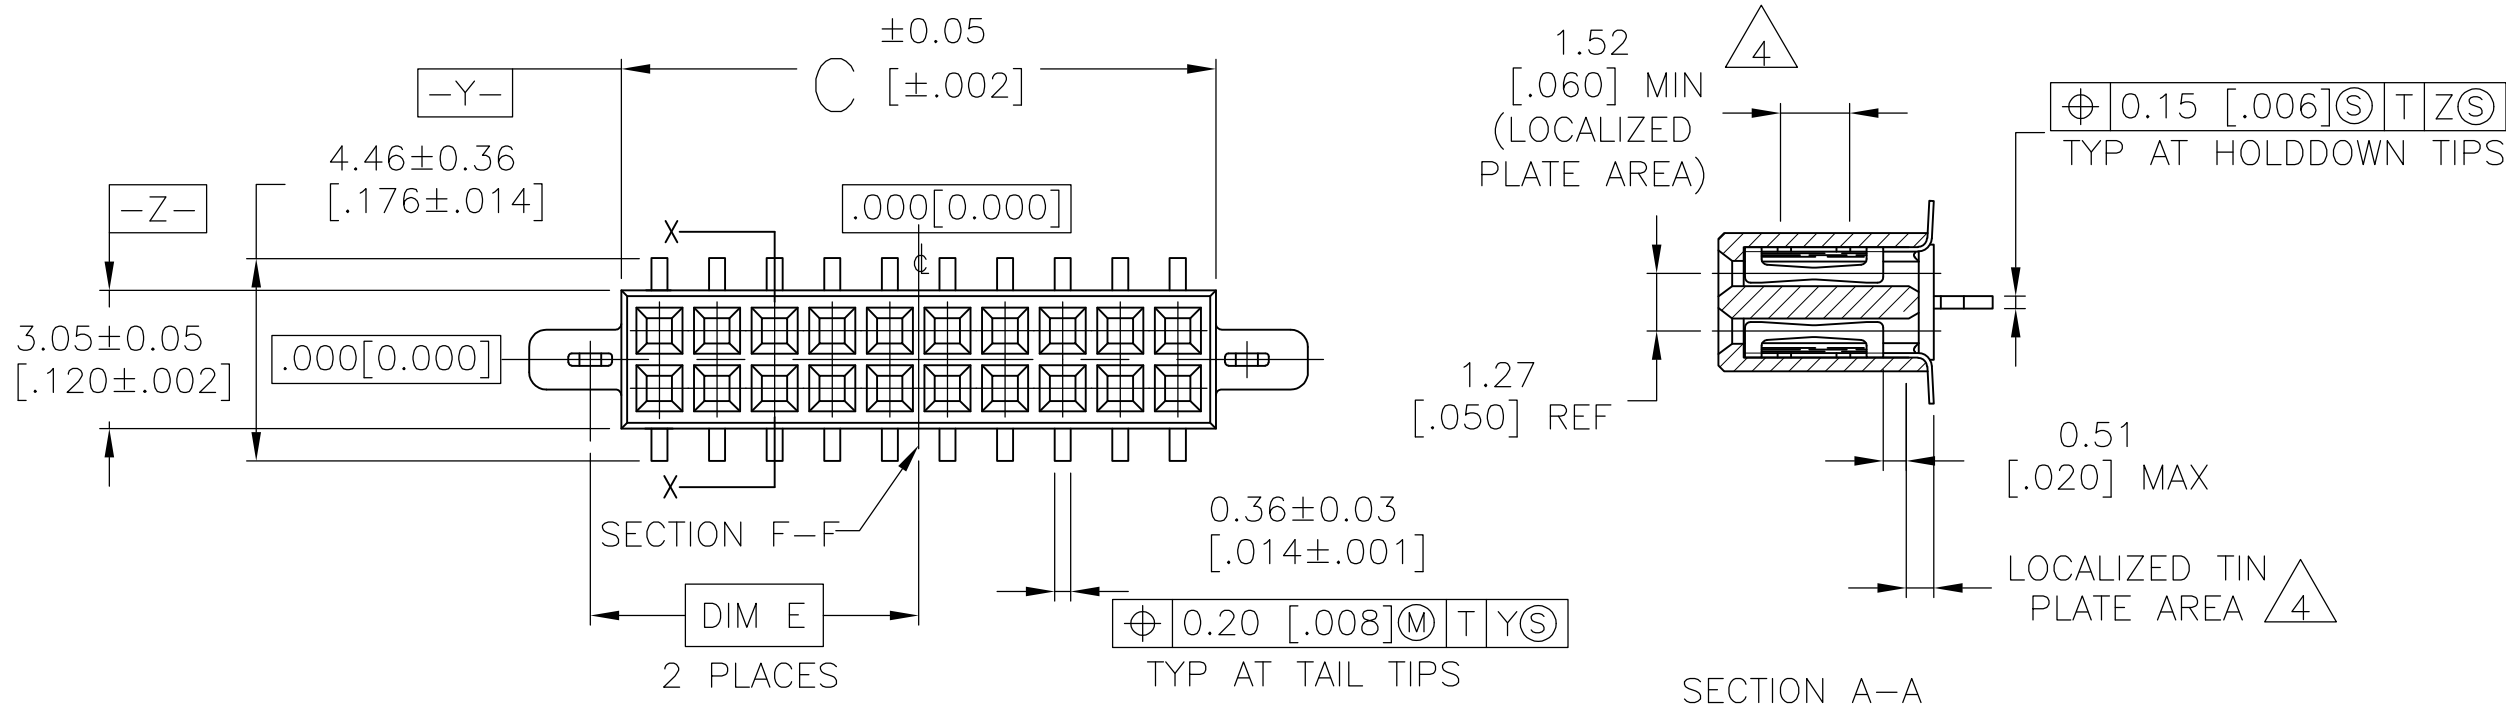


BASIC DIMENSIONS FOR
EVEN NO OF SPACES
(SEE TABLE)

BASIC DIMENSIONS FOR
ODD NO OF SPACES
(SEE TABLE)

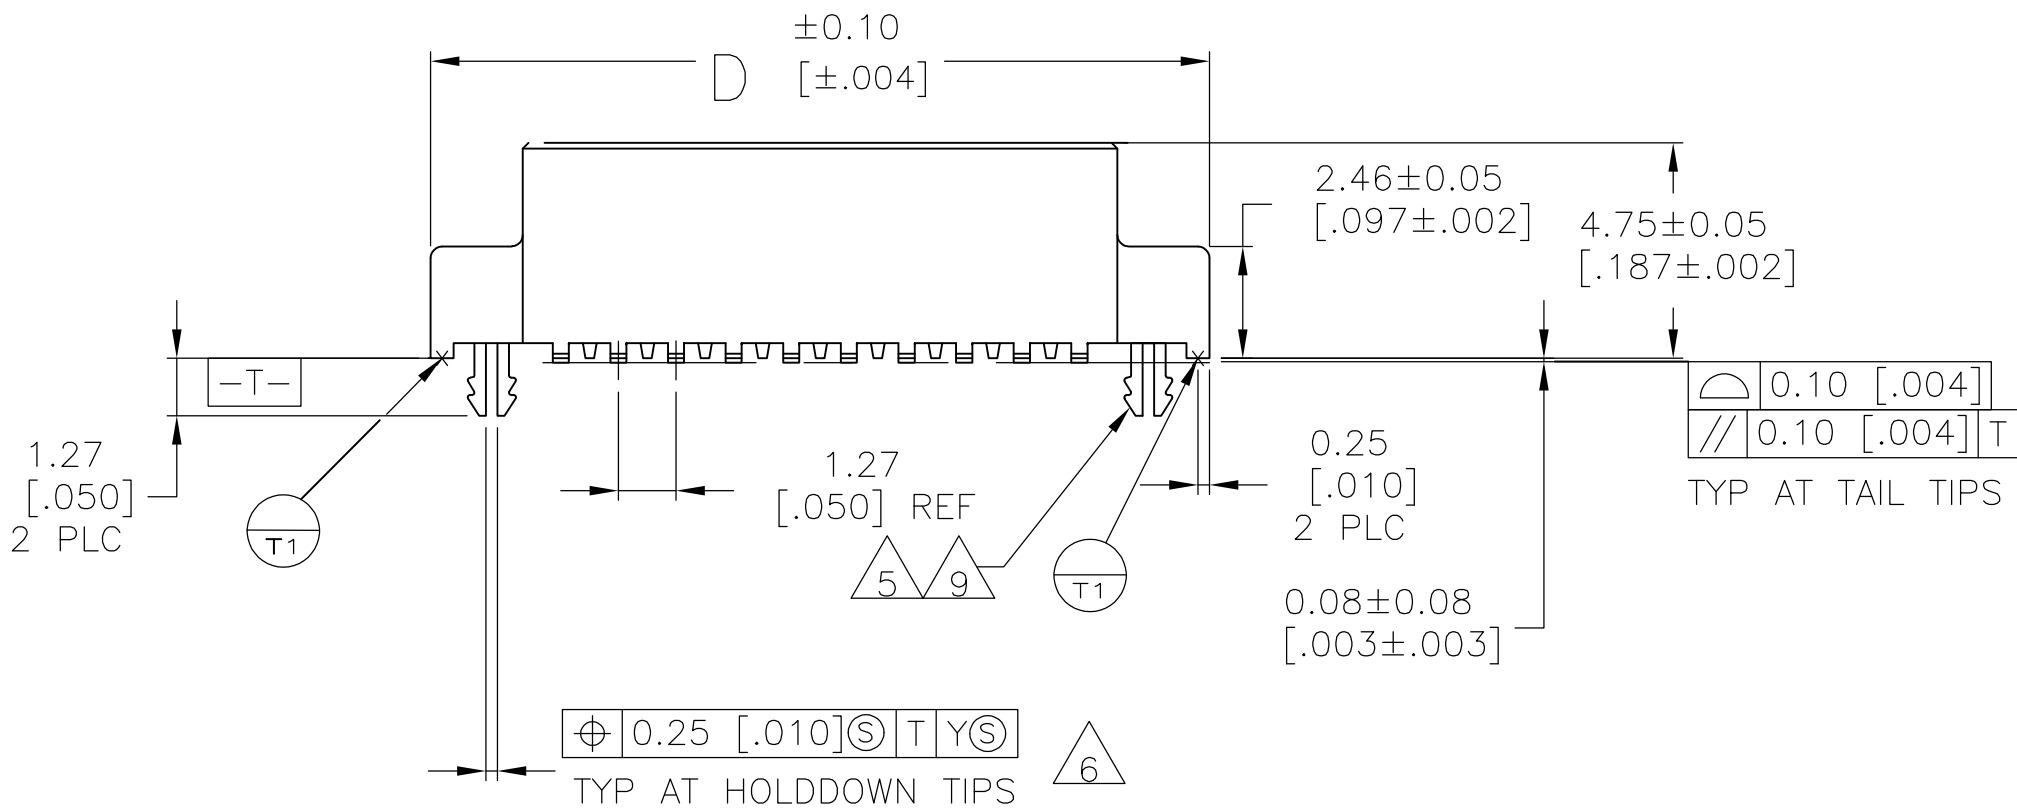

- 1 LCP, COLOR - BLACK
- 2 COPPER ALLOY PER ASTM SPECIFICATION B422.
- 3 COPPER ALLOY PER ASTM SPECIFICATION B194.
- 4 0.00076 (.000030) GOLD IN LOCALIZED PLATE AREA, 0.00381(.000150) TIN-LEAD ON SOLDER TAILS, ALL OVER 0.00127(.000050) NICKEL
- 5 PLATING: 0.00381[.000150] TIN-LEAD OVER 0.00127[.000050] NICKEL
- 6 USE 1.32±0.020(.052±.001) DRILLED HOLE (#55DRILL) WITH 0.0254(.001) MIN COPPER
- 7 IF PLANNING TO USE MORE THAN ONE MATING PAIR OF CONNECTORS TO INTERCONNECT BOARDS, PLEASE REFER TO PARAGRAPH 3.3 IN THE APPLICATION SPEC, 114-7010.
- 8 0.00076 (.000030) GOLD IN LOCALIZED PLATE AREA, 0.00381(.000150) TIN ON SOLDER TAILS, ALL OVER 0.00127(.000050) NICKEL
- 9 PLATING: 0.00381(.000150) TIN OVER 0.00127(.000050) NICKEL
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

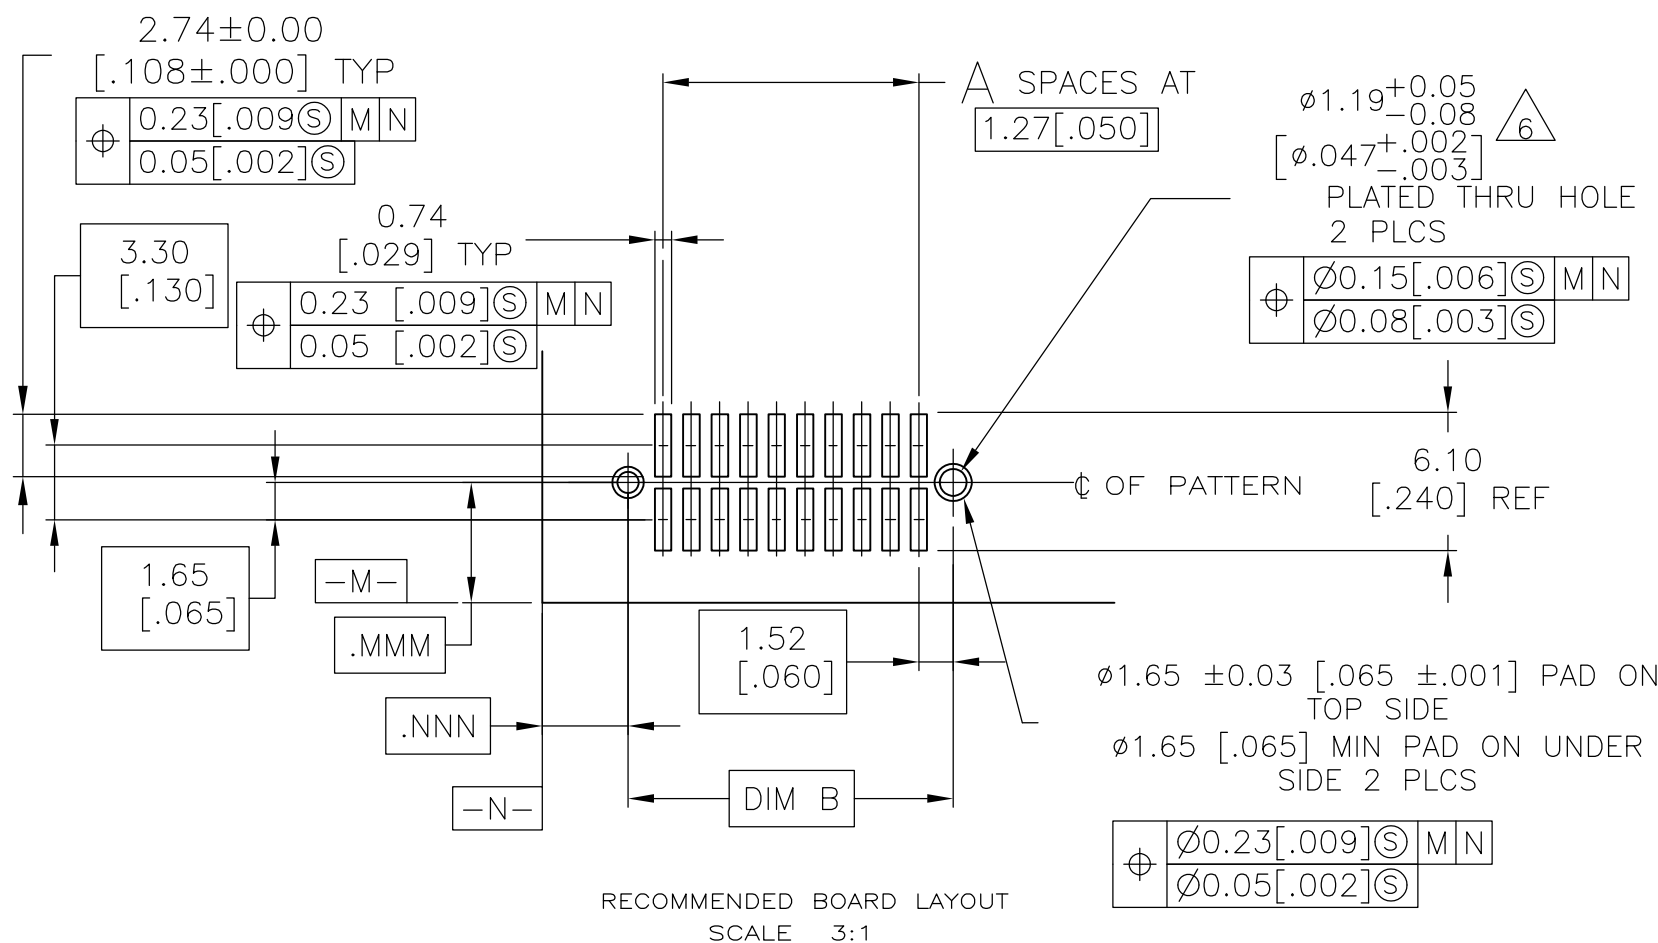

10	OBSOLETE	16.76 [.660]	36.22 [1.426]	32.16 [1.266]	33.53 [1.320]	24	50	8.5-104803-5
	OBSOLETE	13.59 [.535]	29.87 [1.176]	25.81 [1.016]	27.18 [1.070]	19	40	8.5-104803-4
	OBSOLETE	32.640 [1.285]	67.97 [2.676]	63.91 [2.516]	65.28 [2.570]	49	100	8.5-104803-3
		26.290 [1.035]	55.27 [2.176]	51.21 [2.016]	52.58 [2.070]	39	80	8.5-104803-2
	OBSOLETE	19.940 [.785]	42.57 [1.676]	38.51 [1.516]	39.88 [1.570]	29	60	8.5-104803-1
10		16.76 [.660]	36.22 [1.426]	32.16 [1.266]	33.53 [1.320]	24	50	104803-5
	OBSOLETE	13.59 [.535]	29.87 [1.176]	25.81 [1.016]	27.18 [1.070]	19	40	104803-4
	OBSOLETE	32.640 [1.285]	67.97 [2.676]	63.91 [2.516]	65.28 [2.570]	49	100	104803-3
		26.290 [1.035]	55.27 [2.176]	51.21 [2.016]	52.58 [2.070]	39	80	104803-2
10		19.940 [.785]	42.57 [1.676]	38.51 [1.516]	39.88 [1.570]	29	60	104803-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KATE HELM 04/30/91		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608							
DIMENSIONS: mm [INCHES]		CHK DAN GORENC 05/04/91									
		APVD DAN GORENC 05/04/91		NAME RCPT ASSY,VERT,DBL-ROW, SURF-MT,AMPMODU 50/50 GRID CONNECTOR							
		PRODUCT SPEC —									
		APPLICATION SPEC —		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		MATERIAL —		FINISH 		WEIGHT —		A2 00779		C-104803	
CUSTOMER DRAWING				SCALE 6:1		SHEET 1 of 1		REV M1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-104803-2](#)