SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROYED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA 22.2, # 8 VDE APPROVED: EN 133200

OPERATING SPECIFICATIONS

LINE CURRENT/YOLTAGE: 20 AMP/40°C, 120/250YAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

0.40mA @ 120V, 60Hz EACH LINE TO GROUND: 0.70mA@ 250V, 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ic.

60

IN AN AMBIENT, T_0 , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_0 - \sqrt{100 - I_0}$ 100 - T_o $I_0 = I_r - /$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH.
CURRENT DYERLOAD TEST: 6 TIMES I FOR 8 SECONOS

CATALOG # 20VB1

ECO # | APPRVD | DATE

130N□V06

TEST SPECIFICATIONS:

INDUCTANCE: 0.44mH NOMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250YAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0089µF ±20% LINE TO LINE: 0.012µF ±20% DISCHARGE RESISTOR: 1.5M

L/G AND L/L I.R.


6000M ∩ (MIN.) @ 100YDC, 20°C AND 50% RH NO DISCHARGE RESISTOR:

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500YAC OR 2250YDC FOR 1 MINUTE LINE TO LINE: 1450YDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

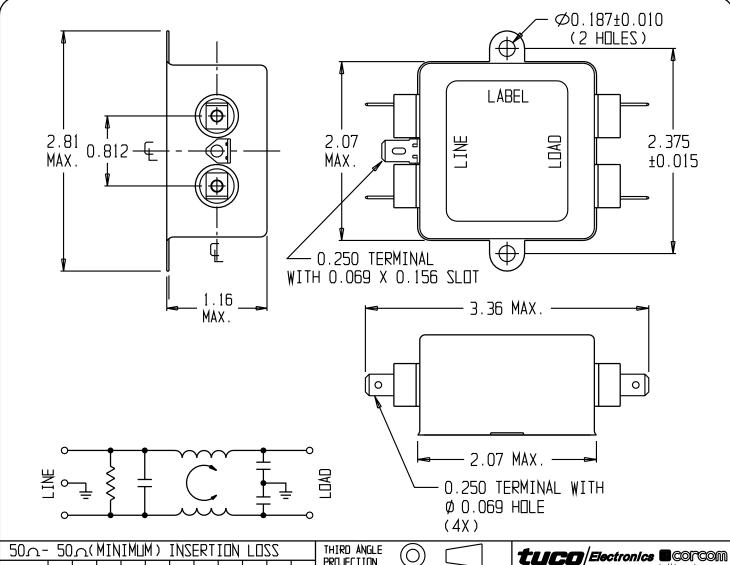

50A- 50A(MINIMUM) INSERTION LOSS										
FREGLIENCY MHz	0.15	0.5	1.0	2.0	5.0	10	20	30		
COMMON dB	7	20	27	34	40	45	45	50		
DIFF. dB										

PROJECTION UNLESS OTHERWISE SPECIFIED, TOLERANCE TO BE ± .025 MATERIAL & FINISH: AS SUPPLIED

This document is proprietory to CORCOM INC and is not to be reproduced nor used for manufacturing purposes except on CORCOM'S prior written consent.



CUSTOMER DRAWING 20VB1

,			
TYCO: 1-1	6609021-1		
	DATE: 12SEP89	CATALOG NO.	REY.
	DRIG: CW	20VB1	B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: