

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

NOV ,2001.

© COPYRIGHT 2001 By --






ALL RIGHTS RESERVED.

LOC
J

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	J3	REVISED PER ECR-16-002212	15FEB16	S.Z	S.L

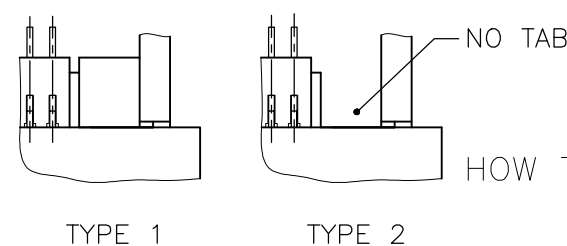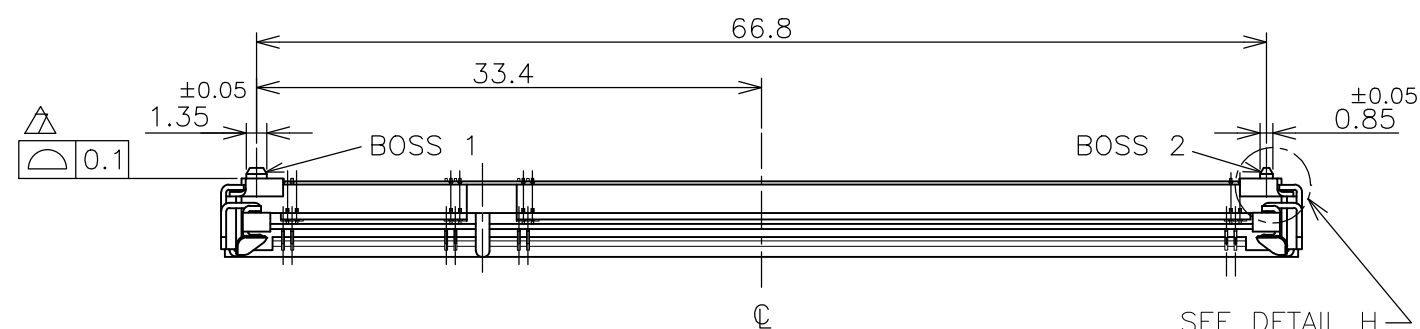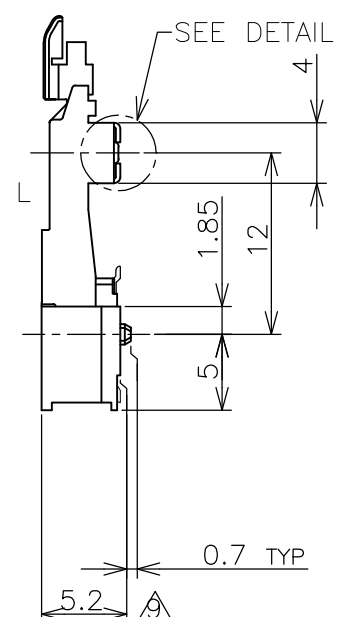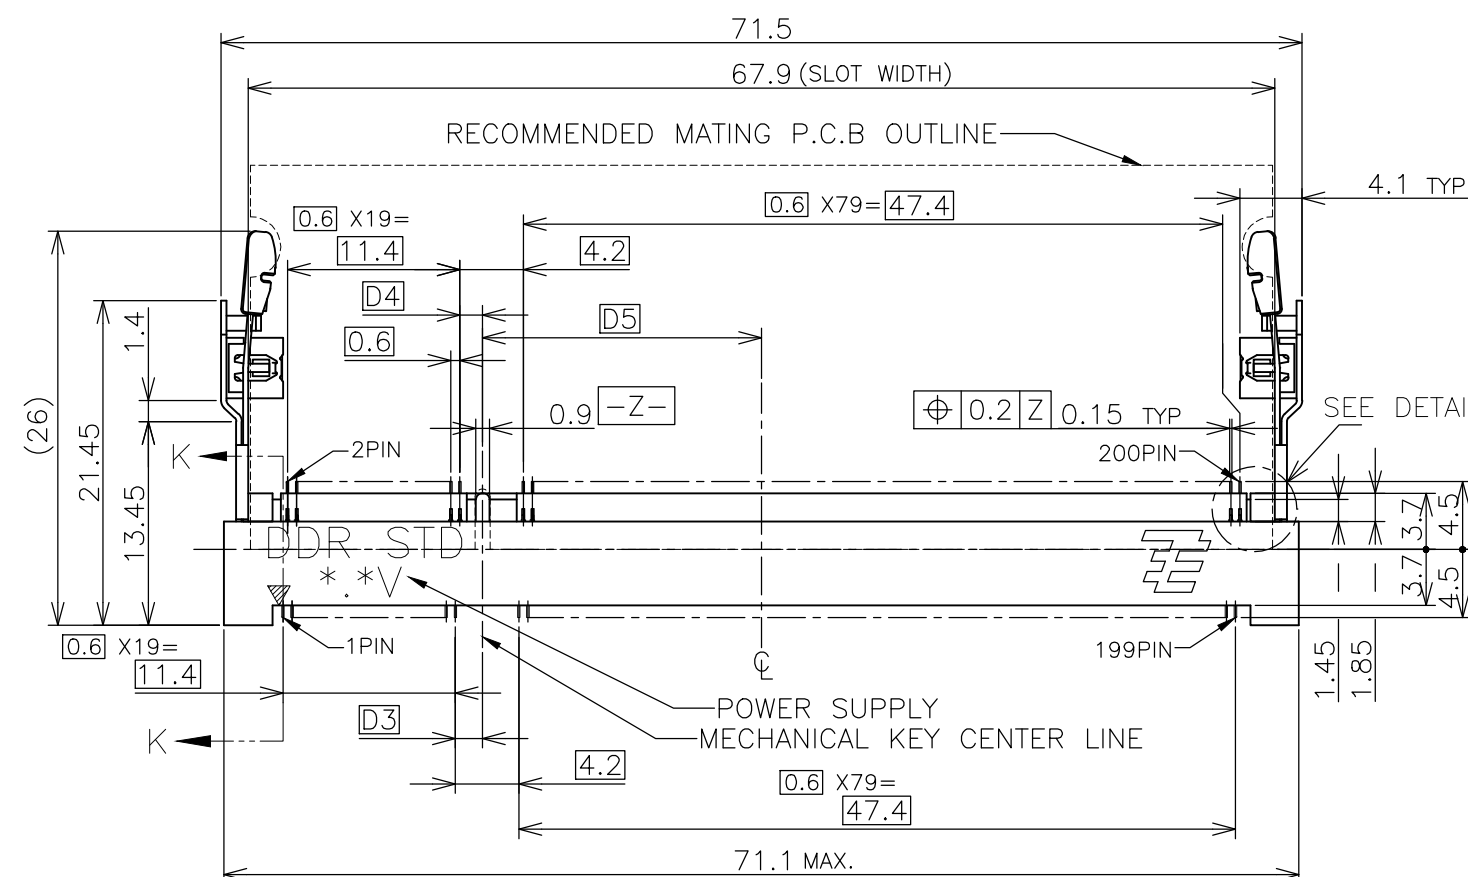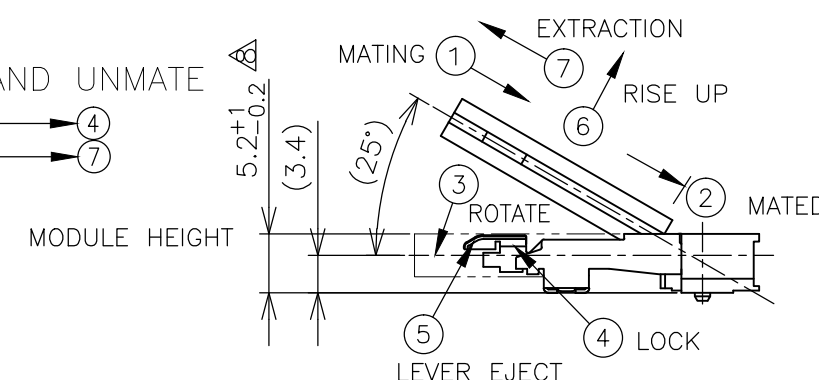DETAIL L
(SCALE 5:1)

(APPLIED TO SHEET 1-2)

1. MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
CONTACT: COPPER ARROY
LOCK LEVER: STAINLESS STEEL
SOLDER PEG: COPPER ARROY

△ FINISH ; CONTACT AREA: GOLD FLASH ON 0.0013MIN ALL OVER NICKEL.
SOLDERING AREA: GOLD FLASH PLT.
SOLDER PEG: TIN PLATING.

△ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.

△ TOLERANCES NON-CUMULATIVE.

△ NOT TO SCALE.

△ INSIDE MUST BE RESIST COAT EXCEPT SOLDER PATTERN.




△ COPLANARITY : 0.1 MAX.

△ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.

△ NOT MATING CONDITION.

△ FINISH ; CONTACT AREA: 0.00076 GOLD ON 0.0013MIN ALL OVER NICKEL.
SOLDERING AREA: 0.00076 GOLD PLT.
SOLDER PEG: TIN PLATING.

11 IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY,
OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE
INSERTED AND LOCKED IN THE LATCH.

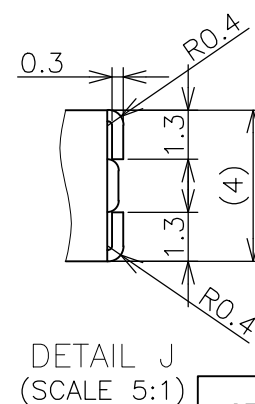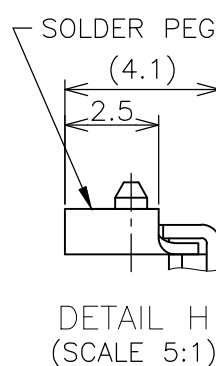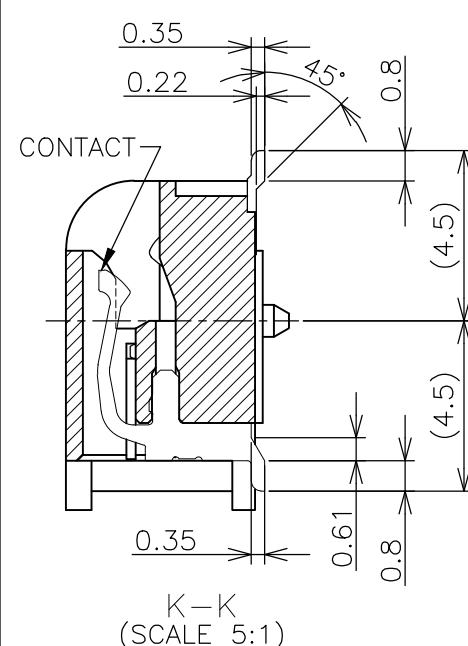

GENERAL TOLERANCE
10 $\geq$: $\pm$ 0.2
30 $\geq$ >10: $\pm$ 0.25
100 $\geq$ >30: $\pm$ 0.3
ANGLES: $\pm$ 3°

TYPE 1	△	AVAILABLE	—H—	2.5V (DDR1)	18.45	1.5	1.8	200	1473005-5
TYPE 2	△	AVAILABLE	BOSSLESS	1.8V (DDR2)	17.55	2.4	2.7	200	1-1473005-4
TYPE 2	△	AVAILABLE	—H—	1.8V (DDR2)	17.55	2.4	2.7	200	1473005-4
TYPE 1	△	AVAILABLE	HOUSING COLOR:GRAY BOSSLESS	2.5V (DDR1)	18.45	1.5	1.8	200	6-1473005-1
TYPE 1	△	AVAILABLE	BOSSLESS	2.5V (DDR1)	18.45	1.5	1.8	200	1-1473005-1
TYPE 1	△	AVAILABLE	—H—	2.5V (DDR1)	18.45	1.5	1.8	200	1473005-1
TAB TYPE	FINISH	TOOLING STATUS	REMARK	POWER SUPPLY (TYPE)	D5	D4	D3	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN B.WONG 15JUL10

CHK C.WANG 15JUL10

APVD S.YAO 15JUL10

PRODUCT SPEC

108-5701

APPLICATION SPEC

WEIGHT 4.7g

CUSTOMER DRAWING


STE TE Connectivity


DDR1 & DDR2 SODIMM SOCKET
0.6mm PITCH 200POS
STANDARD PROFILE STANDARD TYPE

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A300779 C-1473005

SCALE 2:1 SHEET 1 OF 4 REV J3

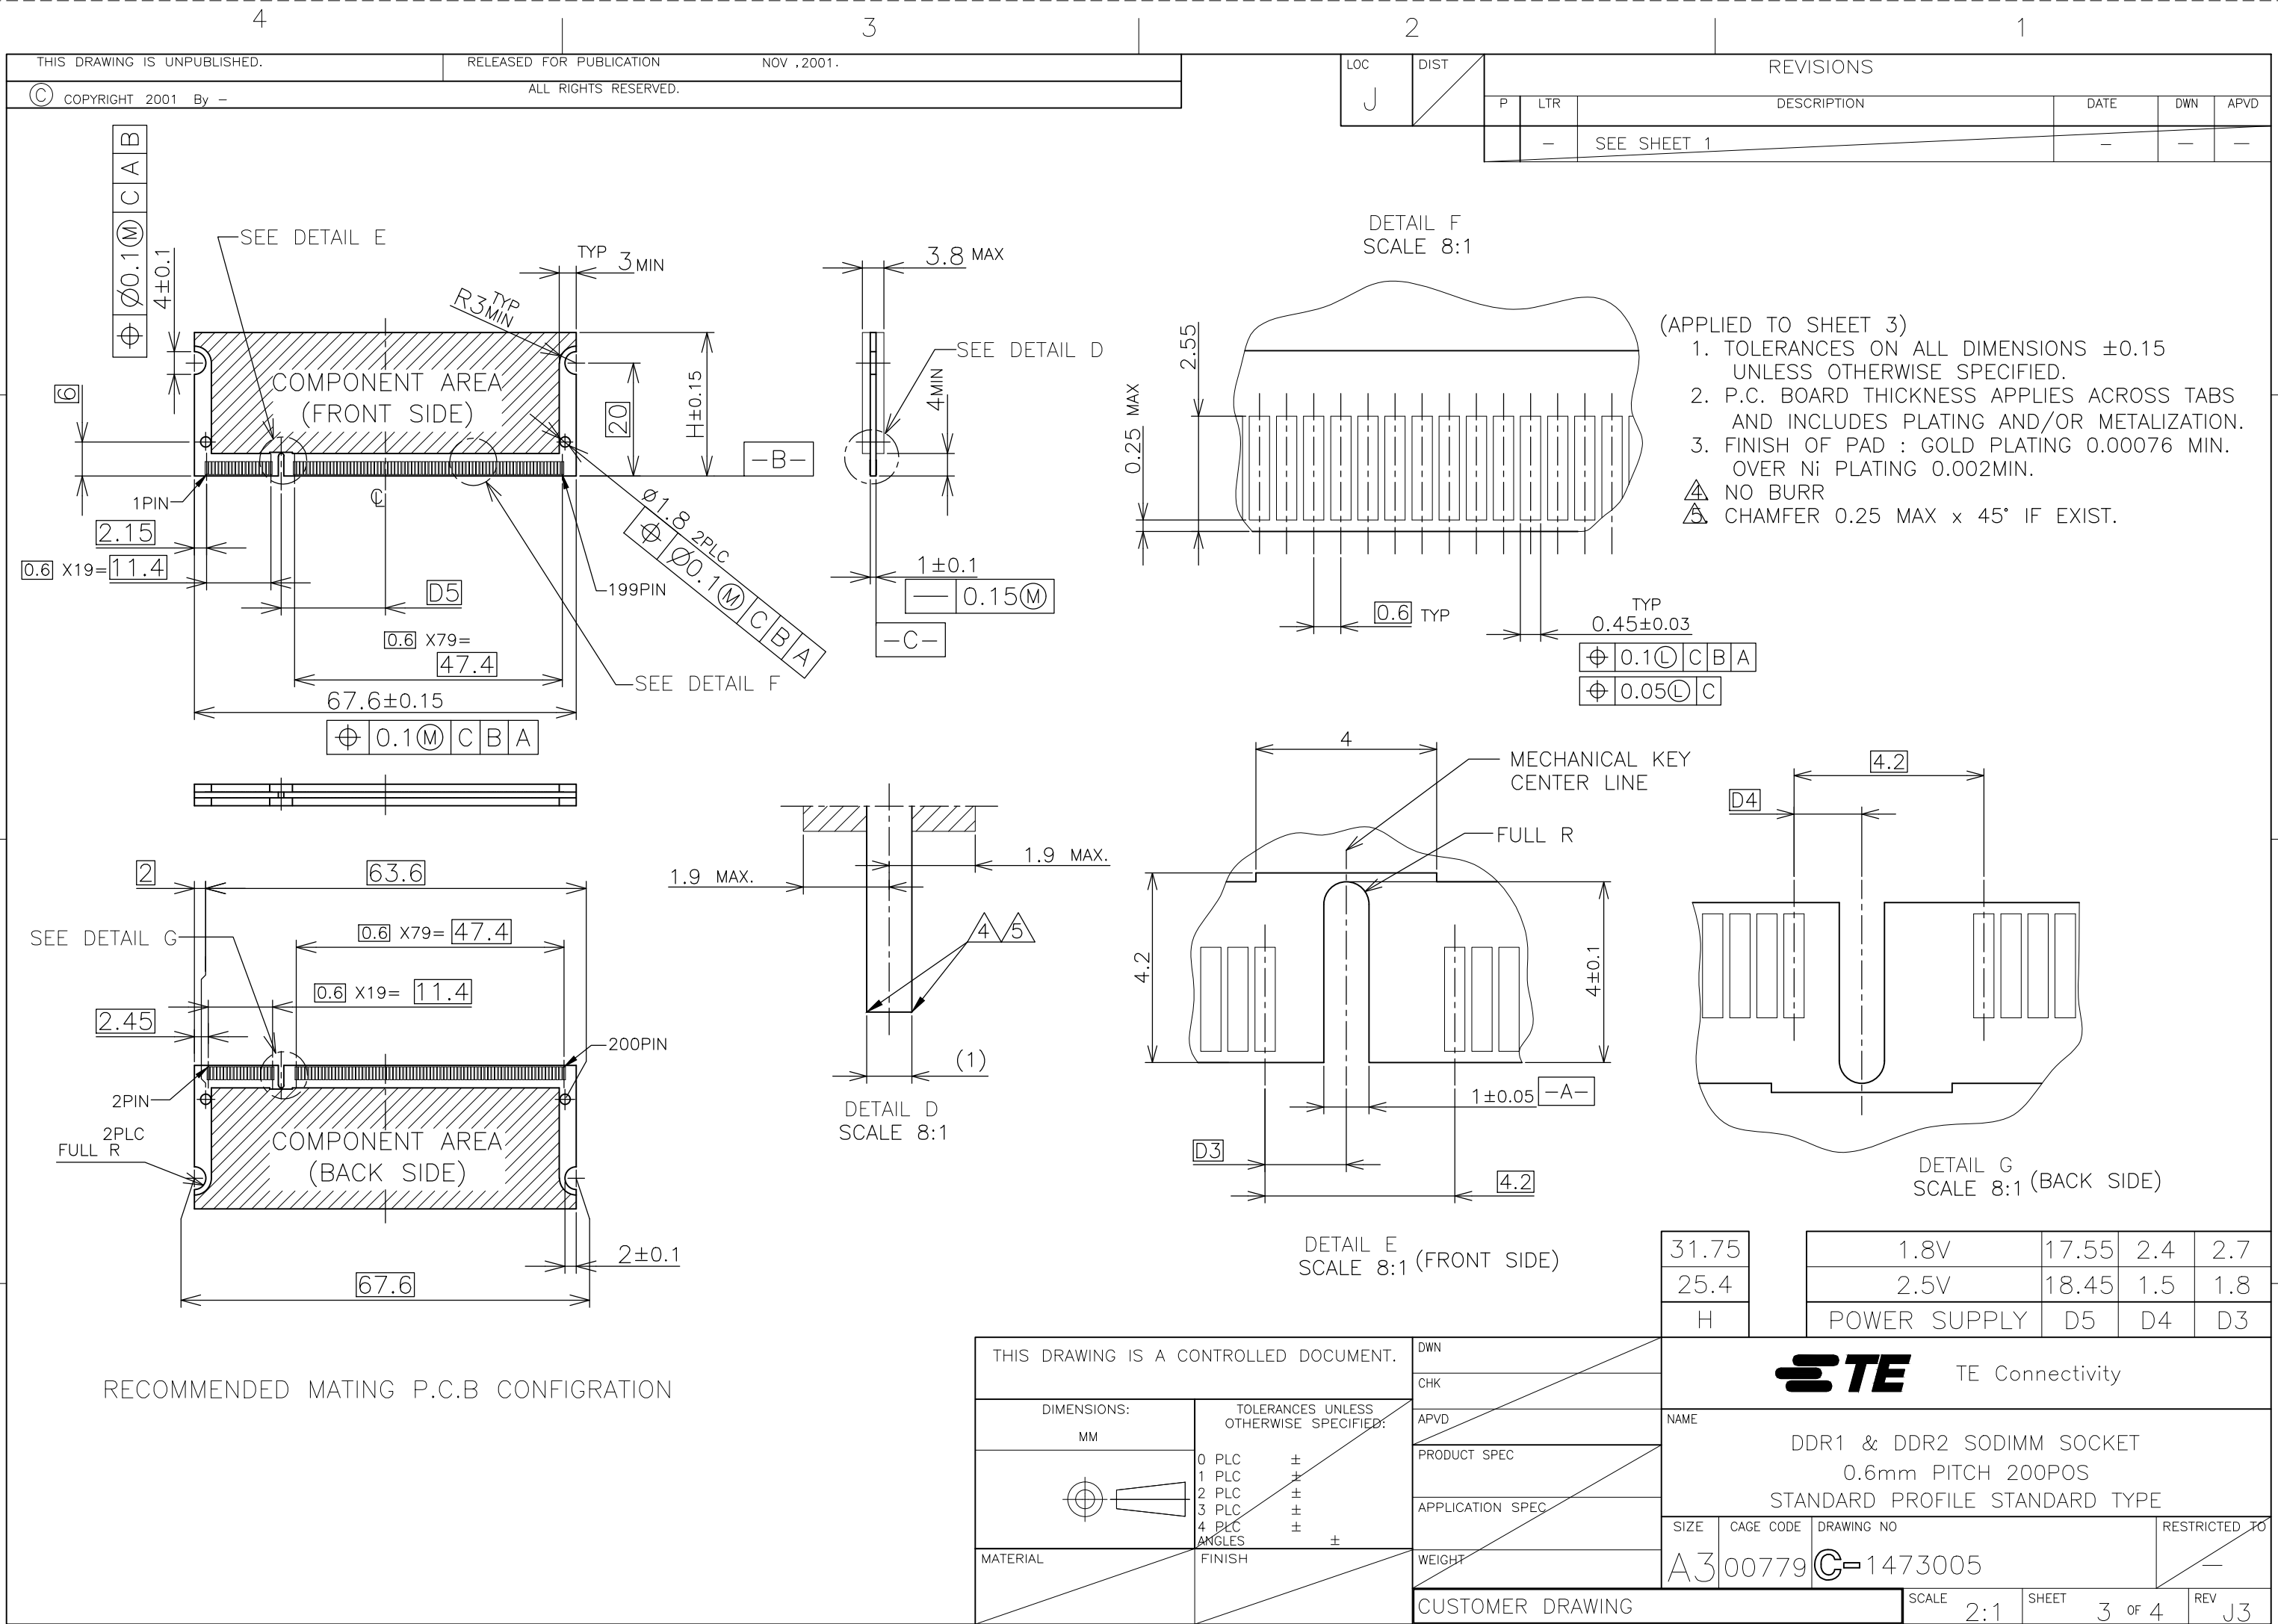

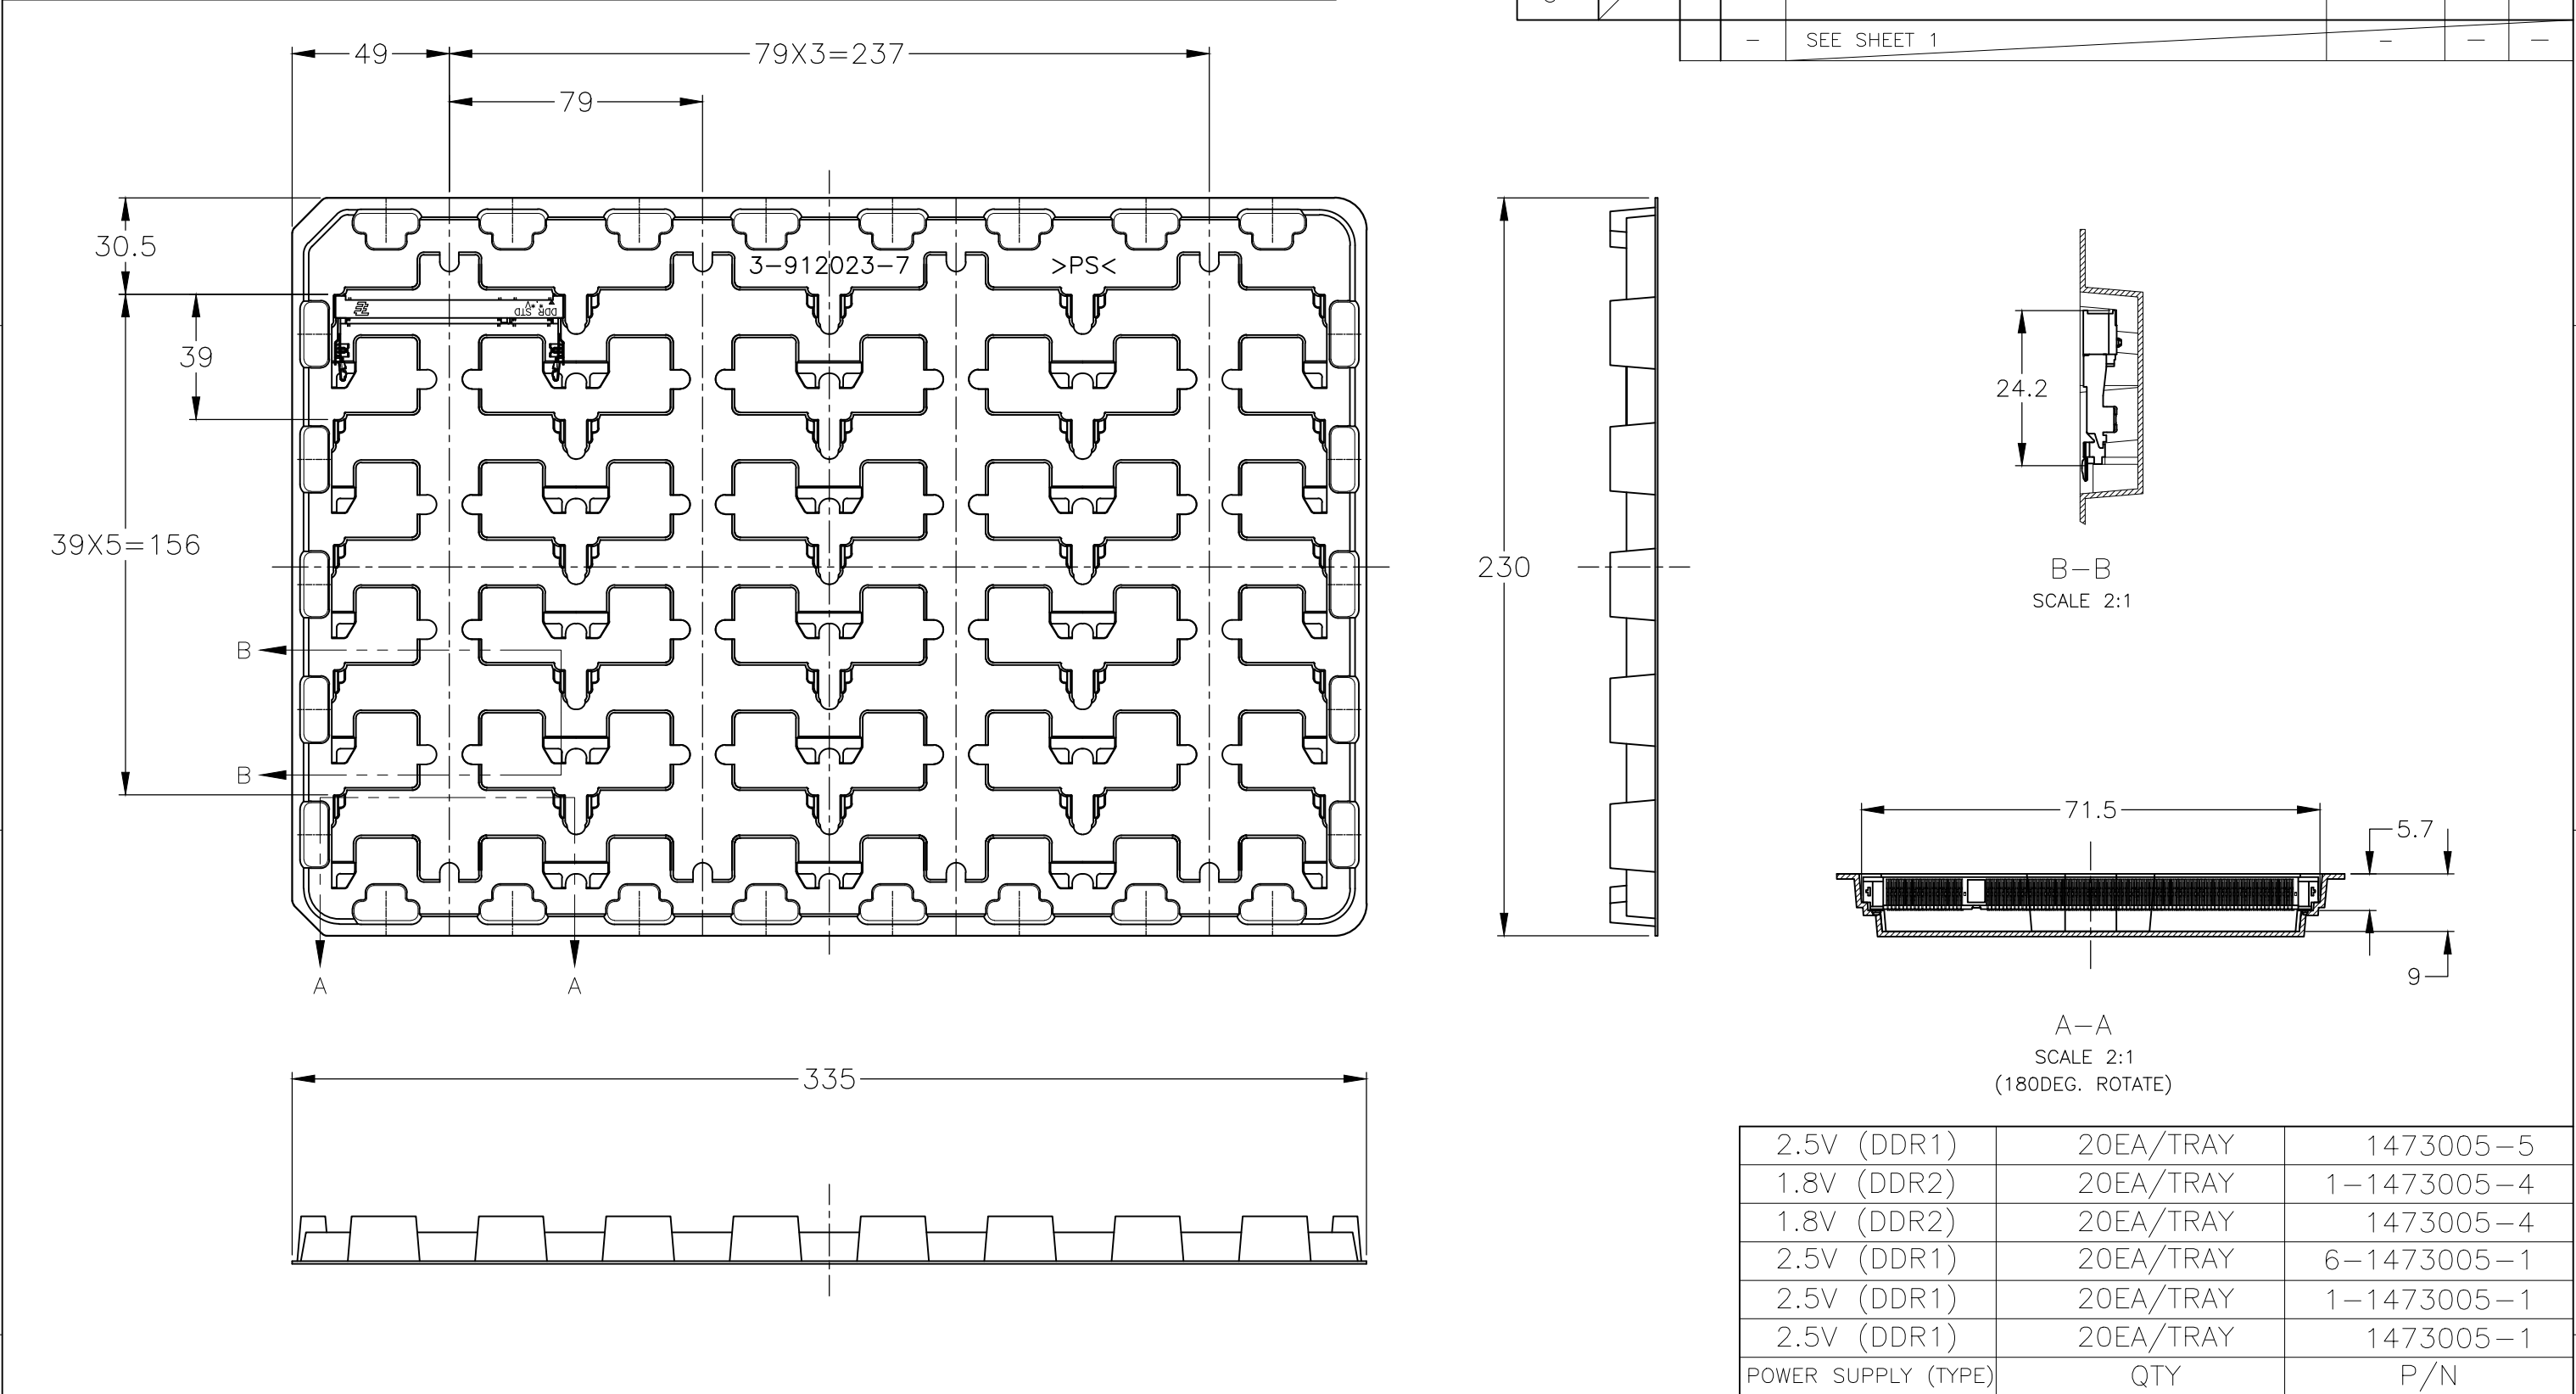

2.5V (DDR1)	20EA/TRAY	1473005-5
1.8V (DDR2)	20EA/TRAY	1-1473005-4
1.8V (DDR2)	20EA/TRAY	1473005-4
2.5V (DDR1)	20EA/TRAY	6-1473005-1
2.5V (DDR1)	20EA/TRAY	1-1473005-1
2.5V (DDR1)	20EA/TRAY	1473005-1
POWER SUPPLY (TYPE)	QTY	P/N

(APPLIED TO SHEET 4)

1. THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.
2. GENERAL TOLERANCE: ± 0.5

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity		
		CHK			
		APVD	NAME		
		PRODUCT SPEC	DDR1 & DDR2 SODIMM SOCKET		
		APPLICATION SPEC	0.6mm PITCH 200POS		
		WEIGHT	STANDARD PROFILE STANDARD TYPE		
		CUSTOMER DRAWING	SIZE	CAGE CODE	DRAWING NO
			A3	00779	C-1473005
			SCALE	1:2	SHEET 4 OF 4
				REV	J3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1473005-4](#)