
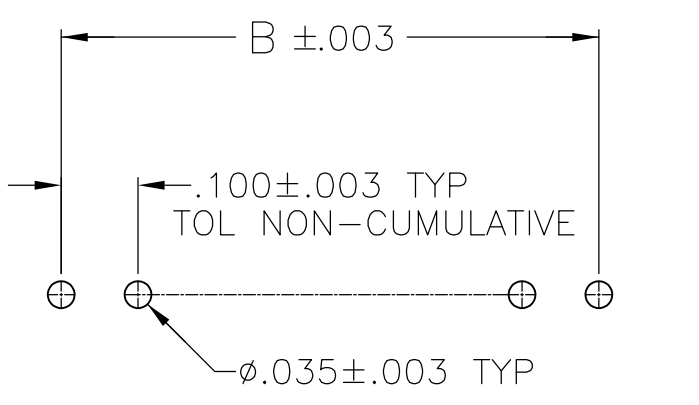
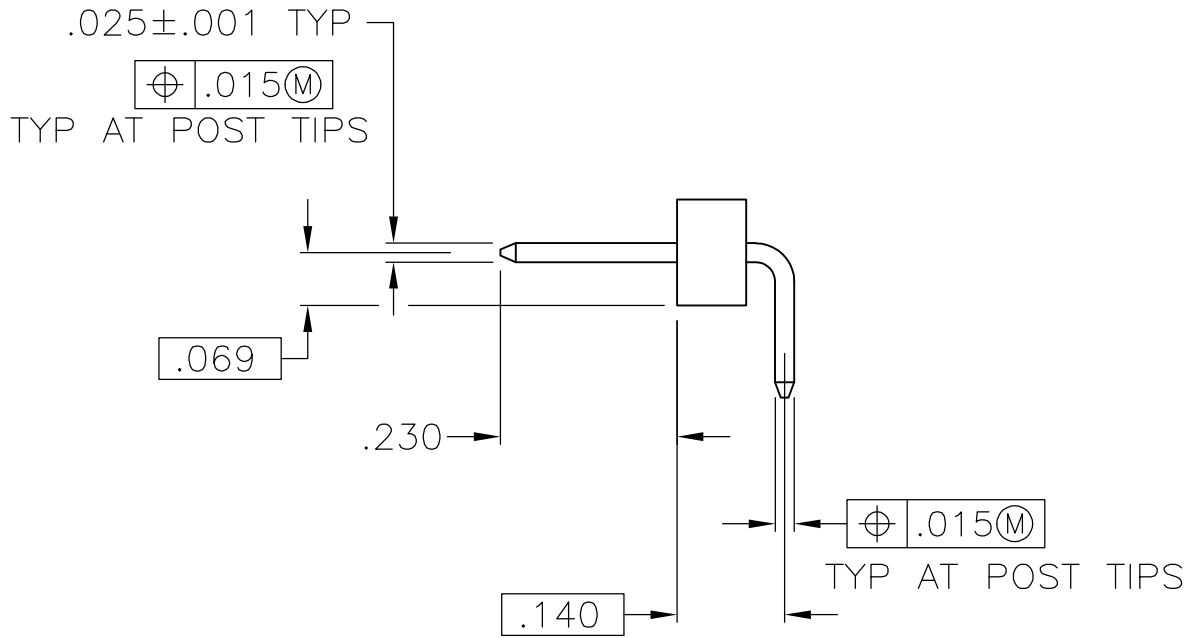
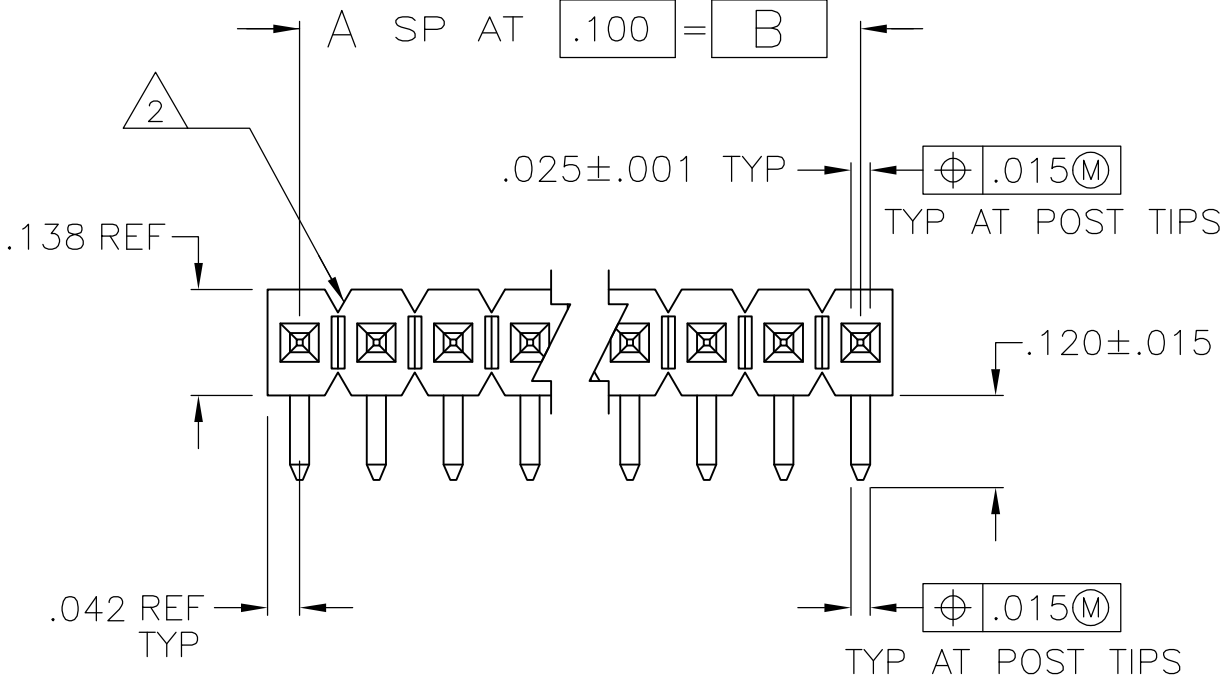


P	LTR	DESCRIPTION	DATE	DWN	APVD
J5	REVISED	PER ECO-16-010261	12JUL2016	NK	MM

- 1 ASSEMBLIES MAY BE BROKEN TO DESIRED NO OF POSITIONS.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT.
- 3 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 4 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
- 7 .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

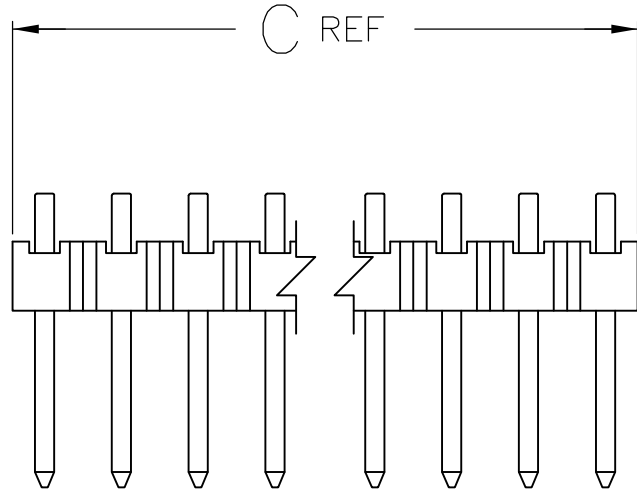

RECOMMENDED HOLE LAYOUT

OBSOLETE	7	7	3.984	3.900	39	40	-9-103329-0	OBSOLETE	4	4	3.984	3.900	39	40	4-103329-2
	7	7	3.884	3.800	38	39	-8-103329-9		3	3	.984	.900	9	10	4-103329-1
	7	7	3.784	3.700	37	38	-8-103329-8		3	3	3.984	3.900	39	40	4-103329-0
	7	7	3.684	3.600	36	37	-8-103329-7		3	3	3.884	3.800	38	39	-3-103329-9
	7	7	3.584	3.500	35	36	-8-103329-6		3	3	3.784	3.700	37	38	-3-103329-8
	7	7	3.484	3.400	34	35	-8-103329-5		3	3	3.684	3.600	36	37	-3-103329-7
	7	7	3.384	3.300	33	34	-8-103329-4		3	3	3.584	3.500	35	36	-3-103329-6
	7	7	3.284	3.200	32	33	-8-103329-3		3	3	3.484	3.400	34	35	-3-103329-5
	7	7	3.184	3.100	31	32	-8-103329-2		3	3	3.384	3.300	33	34	-3-103329-4
	7	7	3.084	3.000	30	31	-8-103329-1		3	3	3.284	3.200	32	33	-3-103329-3
	7	7	2.984	2.900	29	30	-8-103329-0		3	3	3.184	3.100	31	32	-3-103329-2
	7	7	2.884	2.800	28	29	-7-103329-9		3	3	3.084	3.000	30	31	-3-103329-1
	7	7	2.784	2.700	27	28	-7-103329-8		3	3	2.984	2.900	29	30	-3-103329-0
	7	7	2.684	2.600	26	27	-7-103329-7		3	3	2.884	2.800	28	29	-2-103329-9
	7	7	2.584	2.500	25	26	-7-103329-6		3	3	2.784	2.700	27	28	-2-103329-8
	7	7	2.484	2.400	24	25	-7-103329-5		3	3	2.684	2.600	26	27	-2-103329-7
	7	7	2.384	2.300	23	24	-7-103329-4		3	3	2.584	2.500	25	26	-2-103329-6
	7	7	2.284	2.200	22	23	-7-103329-3		3	3	2.484	2.400	24	25	-2-103329-5
	7	7	2.184	2.100	21	22	-7-103329-2		3	3	2.384	2.300	23	24	-2-103329-4
OBSOLETE	7	7	2.084	2.000	20	21	-7-103329-1	OBSOLETE	3	3	2.284	2.200	22	23	-2-103329-3
	7	7	1.984	1.900	19	20	-7-103329-0		3	3	2.184	2.100	21	22	-2-103329-2
	7	7	1.884	1.800	18	19	-6-103329-9		3	3	2.084	2.000	20	21	-2-103329-1
	7	7	1.784	1.700	17	18	-6-103329-8		3	3	1.984	1.900	19	20	-2-103329-0
	7	7	1.684	1.600	16	17	-6-103329-7		3	3	1.884	1.800	18	19	-1-103329-9
	7	7	1.584	1.500	15	16	-6-103329-6		3	3	1.784	1.700	17	18	-1-103329-8
	7	7	1.484	1.400	14	15	-6-103329-5		3	3	1.684	1.600	16	17	-1-103329-7
	7	7	1.384	1.300	13	14	-6-103329-4		3	3	1.584	1.500	15	16	-1-103329-6
	7	7	1.284	1.200	12	13	-6-103329-3		3	3	1.484	1.400	14	15	-1-103329-5
	7	7	1.184	1.100	11	12	-6-103329-2		3	3	1.384	1.300	13	14	-1-103329-4
	7	7	1.084	1.000	10	11	-6-103329-1		3	3	1.284	1.200	12	13	-1-103329-3
	7	7	.984	.900	9	10	-6-103329-0		3	3	1.184	1.100	11	12	-1-103329-2
	7	7	.884	.800	8	9	-5-103329-9		3	3	1.084	1.000	10	11	-1-103329-1
	7	7	.784	.700	7	8	-5-103329-8		3	3	.984	.900	9	10	-1-103329-0
	7	7	.684	.600	6	7	-5-103329-7		3	3	.884	.800	8	9	103329-9
	7	7	.584	.500	5	6	-5-103329-6		3	3	.784	.700	7	8	103329-8
	7	7	.484	.400	4	5	-5-103329-5		3	3	.684	.600	6	7	103329-7
	7	7	.384	.300	3	4	-5-103329-4		3	3	.584	.500	5	6	103329-6
	7	7	.284	.200	2	3	-5-103329-3		3	3	.484	.400	4	5	103329-5
OBSOLETE	7	7	.184	.100	1	2	-5-103329-2	OBSOLETE	3	3	.384	.300	3	4	103329-4
	7	7	.084	-	-	1	-5-103329-1		3	3	.284	.200	2	3	103329-3
PLATING	C	B	A	NO OF POSN	PART NUMBER			PLATING	C	B	A	NO OF POSN	PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

MATERIAL POST: COPPER ALLOY

FINISH SEE TABLE

DWN J.MARTINELLI 16OCT92

CHK JOHN KNITTLE 23NOV92

APVD B.FLINCHBAUGH 23NOV92

NAME

ASSY,HDR,BREAKAWAY, MODII, SINGLE ROW, .100 C/L, RIGHT ANGLE, WITH .025 SQ POSTS

SIZE CAGE CODE DRAWING NO

RESTRICTED TO

WEIGHT -

A100779

103329

CUSTOMER DRAWING

SCALE 4:1

SHEET 1 OF 1

REV J5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103329-2](#)