


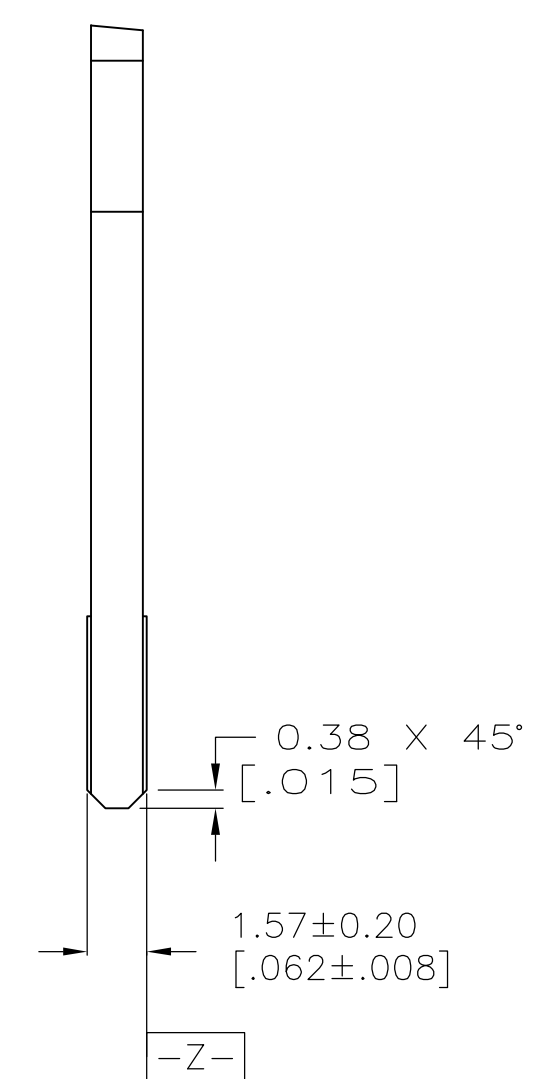

Technical drawing showing a circular feature with a BSC (Best Case) callout. The callout includes the text: $\phi 1.02 \pm 0.00$, $[\phi.040 \pm .000]$, 70, PLC, and a feature control frame: $\oplus \phi 0.15 [.006] \text{S} | \text{X} | \text{Y}$. The drawing also shows a dimension line indicating a distance of 4.85 $[\text{.191}]$ and a note: 34 SPACES @ 2.54 $[\text{.100}] = 86.36 [\text{3.400}]$.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 31MAR2008 MM/LA/MAYER CHK 31MAR2008 A.W.FRANTUM APD 31MAR2008 S.FLOCKINGER		 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.15 [005] 3 PLC ± - 4 PLC ± - ANGLES ± 2°		NAME CONNECTOR ASSEMBLY, STANDARD EDGE II, 2.54[.100] CENTERLINE	
		PRODUCT SPEC 108-9039 APPLICATION SPEC 114-13018		SIZE A1	
MATERIAL SEE NOTE 1		FINISH SEE NOTE 2		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C-5145459	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 2 OF 2 REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5145459-2](#)