

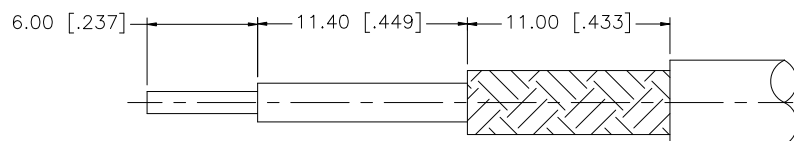
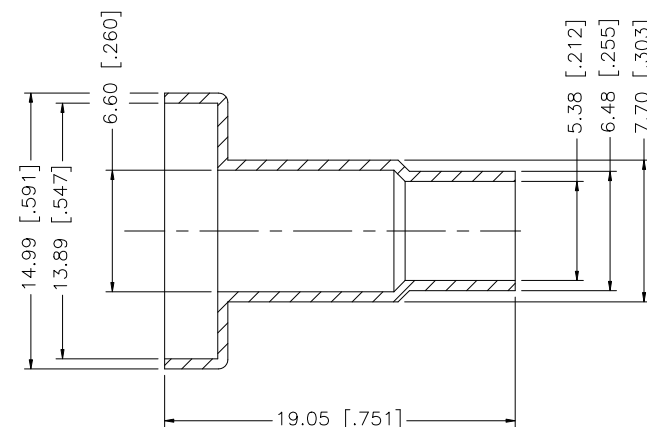


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/20/08	—	INITIAL RELEASE

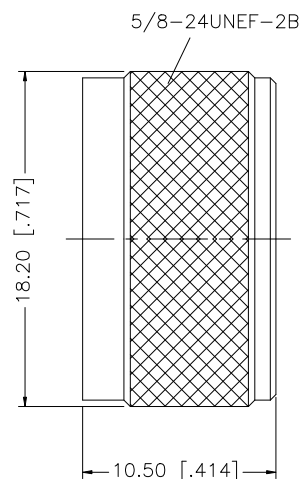

RECOMMENDED CABLE
STRIPPING DIM'S

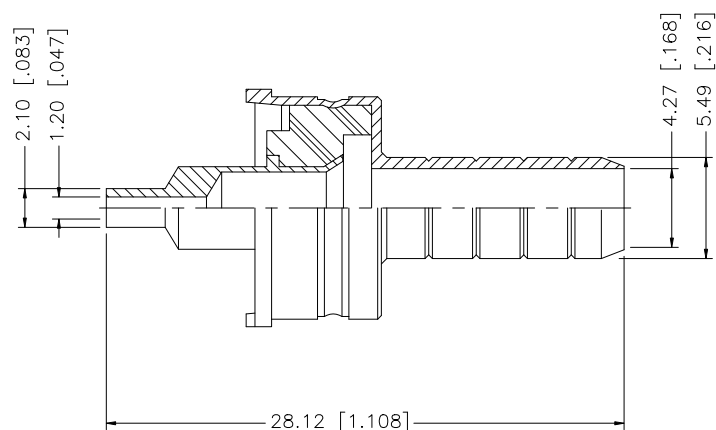

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48].
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73] OR SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	11/20/08						
7						CHECKED								
6						ISSUED				PART DESCRIPTION UHF FCP PLUG (58/U – DCP TYPE)				
5	FERRULE	BRASS	NICKEL	1		SHEET	1 OF 1							
4	CONTACT PIN	BRASS	NICKEL	1						PART NO. 182135				
3	INSULATOR	BAKELITE	BROWN	1										
2	BODY	BRASS	NICKEL	1						DWG. NO. 182135.DWG REV. NC SIZE A SCALE NA				
1	SHELL	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[182135](#)