


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS - in [mm]				
		A ± [0,8]	W ± [0,3]	C ± [0,4]	M ± [0,5]	H ± [0,3]
PV22-4F	#4	.67 [17,02]	.20 [5,08]	.21 [5,33]	.56 [14,22]	.12 [3,05]
PV22-6F	#6	.76 [19,30]	.25 [6,35]	.26 [6,60]	.62 [15,75]	.14 [3,56]

INSTALLATION TOOLS
CT-520
CT-1525 (A POCKET)
CT-2500 (CT-2525CH: A PKT)

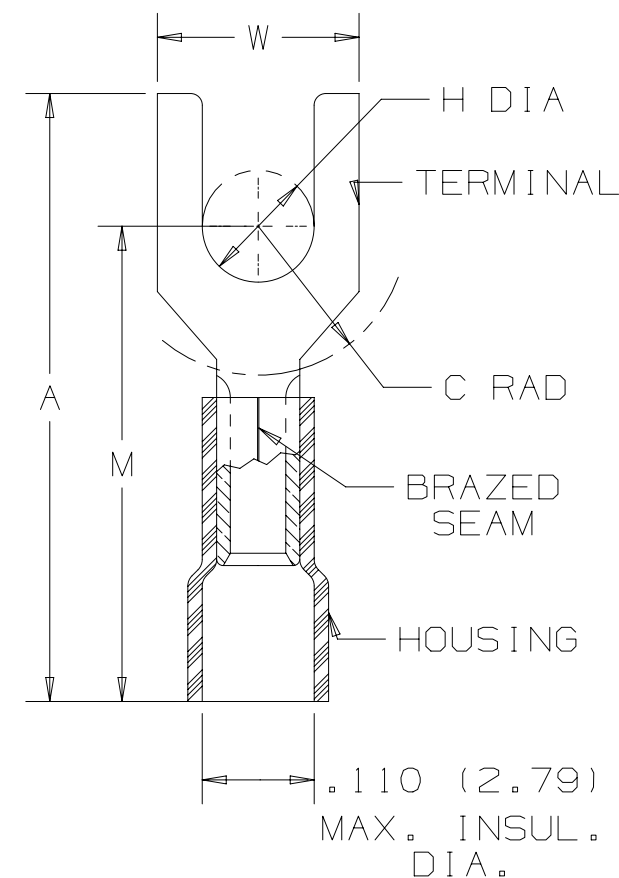

# NOTES:

## 1. RECOMMENDED FOR:

- A. #26-22 AWG SOLID OR STRANDED COPPER WIRE
- B. 221° F (105°C) MAX TEMP. RATING
- C. 600V MAX VOLTAGE RATING

## 2. MATERIAL:

- A. STAMPING - .02" [0,5] THK COPPER, TIN PLATED
- B. HOUSING - VINYL, YELLOW

## 3. SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES

## 4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

## 5. WIRE STRIP LENGTH: 3/16" <sup>+1/32"</sup><sub>-0</sub> [4,8mm <sup>+0,8</sup><sub>-0</sub>]

Panduit part numbers shown on this drawing meet the material requirements of RoHS (European Directive 2002/95/EC on the Restriction of Hazardous Substances) as proposed by the Technical Adaptation Committee.

TITLE		FORK TERMINAL, VINYL INSULATED #26-22 AWG	
ITEM REVISION NAME		CUSTOMER DRAWING	
N41232BA/10		<b>PANDUIT</b>	
DATASET FILE NAME		N41232BA/10	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		MATERIAL:	
.X ± .XX ±		SEE NOTES	
.XXX ± ANGLES ±		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		A41232	
DRAWN BY	DATE	CHK	SCALE
DAW		CH	N/A
SHT 1 OF 1		SIZE	
		A	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PV22-6F-CY](#)