


RELEASED FOR PUBLICATION , 1993.

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

© COPYRIGHT 1993 By -

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J			F	REVISED PER ECR-12-013086	26MAR13	K.M	E.T

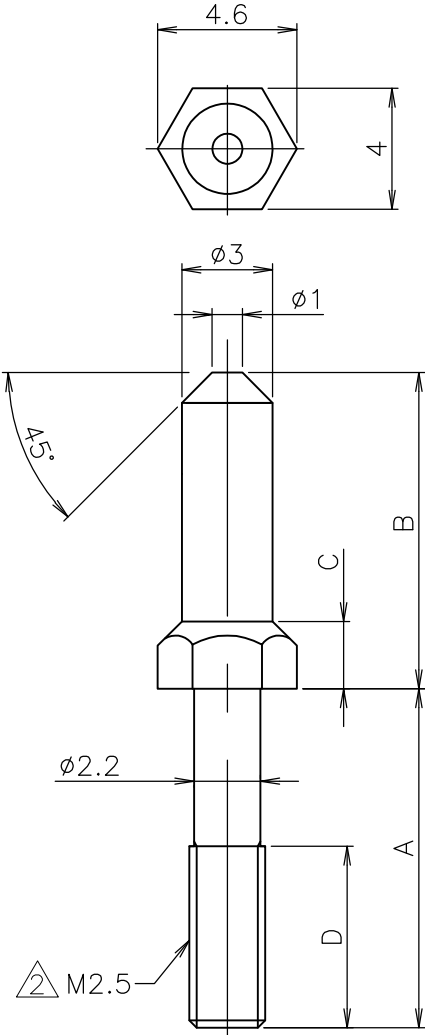

注記


1. 材料及び仕上：黄銅、ニッケルメッキ
② ねじ部先端を除き、ゆるみ止め材料塗布
(ロックタイト DRI-LOC 202, 203 相当)

NOTE

1. MATERIAL AND FINISH BRASS, Ni PLATE
② THREADLOCKING MATERIAL APPLIED,
EXCEPT FOR THREAD TIP AREA.
(EQUIVALENT LOCTITE DRI-LOC 202, 203)

② M2.5

① OBSOLETE	MAKE FROM -1	6	2.22	10.45	11.2	2-177734-1②
		4.6	2.22	10.45	5.6	177734-5
		6	3.02	11.25	10.4	177734-4
		6	3.02	11.25	7	177734-3
		6	2.22	10.45	7.8	177734-2
		6	2.22	10.45	11.2	177734-1
REMARKS		D	C	B	A	P/N

DIMENSIONS:		DWN	16OCT02	MATERIAL		SEE NOTE		FINISH		SEE NOTE	
mm		CHK	16OCT02	TE Connectivity							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	16OCT02								
0 PLC ± 0.25		PRODUCT SPEC		NAME GUIDE PIN FOR AMP DOCKING CONNECTOR							
1 PLC ± 0.25		APPLICATION SPEC									
2 PLC ± 0.25											
3 PLC ±		WEIGHT		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
4 PLC ±				A4		00779		C-177734		—	
ANGLES ± 3°		CUSTOMER DRAWING		SCALE		4:1		SHEET		1 OF 1	
										REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[177734-1](#)