




## TinkerKit Blue Led [5mm]

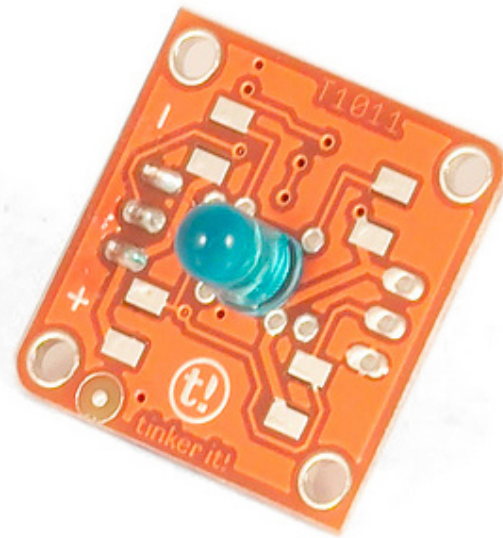

### Overview

The **LED** is possibly the simplest actuator available. It's a low power light source available in many colors. It lights up when powered from an Arduino pin.

**Input:** Arduino provides a maximum of 40 mA per pin; this is enough to light up the LED through the `digitalWrite()` and `analogWrite()` functions.

**Module description:** This module features a 5mm Blue Light Emitting Diode, the standard TinkerKit 3pin connector and a green LED that signals that the module is correctly powered and a tiny yellow LED that shows the current brightness of the blue LED. A resistor provides the optimal amount of current when connected to an Arduino.

This module is an **ACTUATOR** therefore the connector is an **INPUT** that need to be connected to one of the **OUTPUT** connectors on the **TinkerKit Shield**.

## Code Example

```
/*  
based on Blink, Arduino's "Hello World!"  
Turns on an LED on for one second, then off for one second, repeatedly.  
The Tinkerkit Led Modules (T010110-7) is hooked up on O0
```

```
This example code is in the public domain.  
*/
```

```
#define O0 11  
#define O1 10  
#define O2 9  
#define O3 6  
#define O4 5  

```

```
void setup() {  
  // initialize the digital pin as an output.  
  // Pin 13 has an LED connected on most Arduino boards:  
  pinMode(O0, OUTPUT);  
}
```

```
void loop() {  
  digitalWrite(O0, HIGH); // set the LED on  
  delay(1000); // wait for a second  
  digitalWrite(O0, LOW); // set the LED off  
  delay(1000); // wait for a second  
}
```

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Arduino:](#)

[T010111](#)