
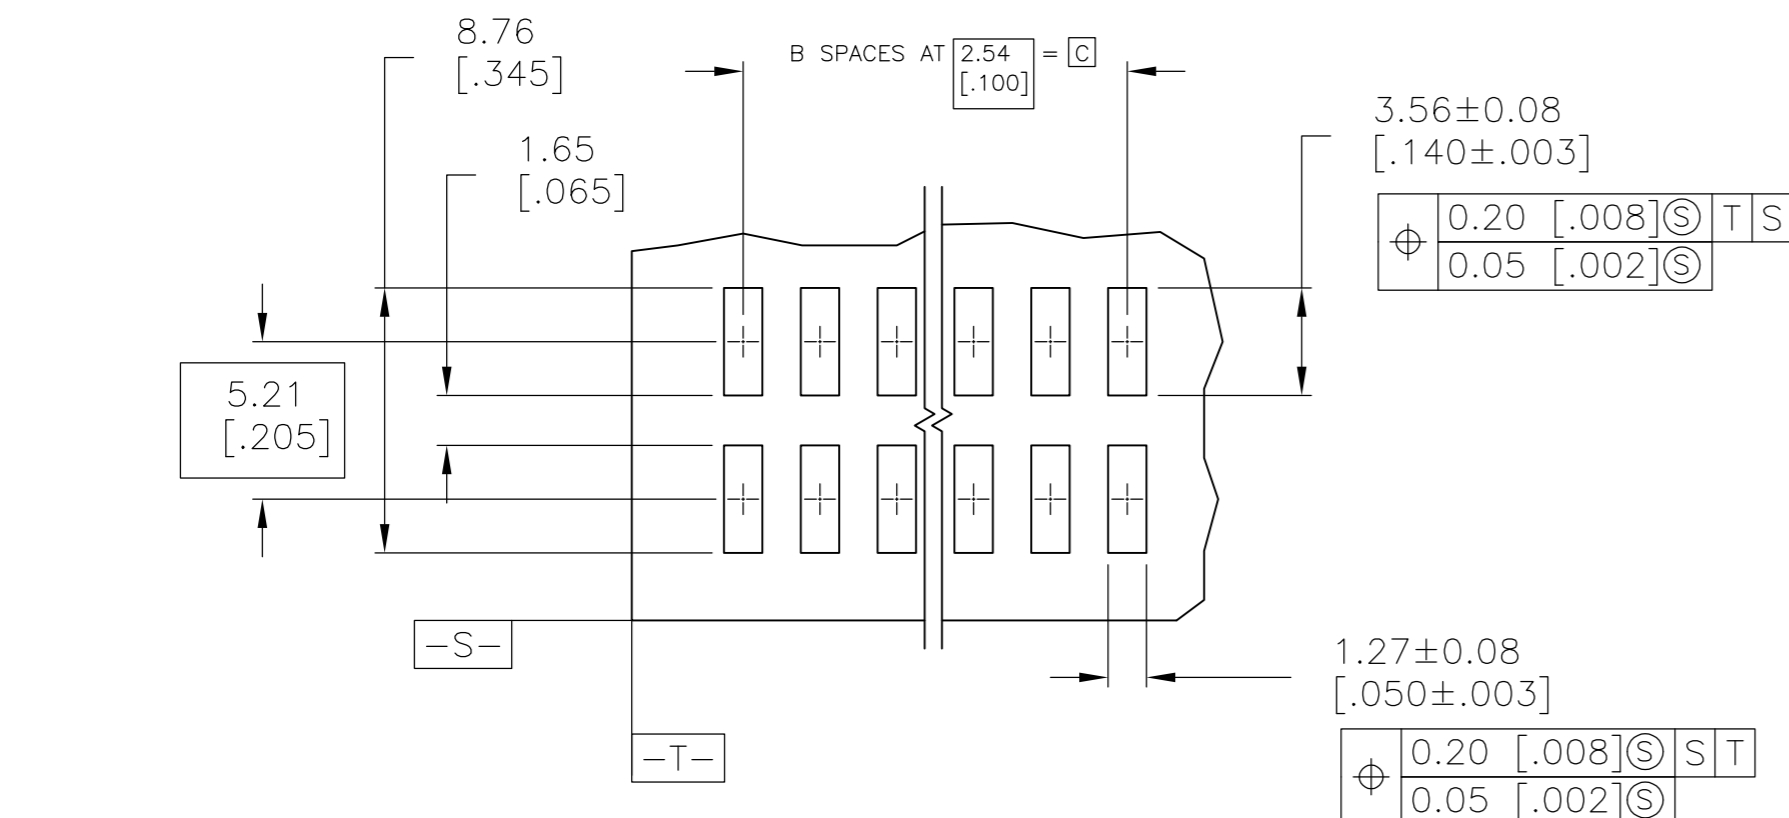
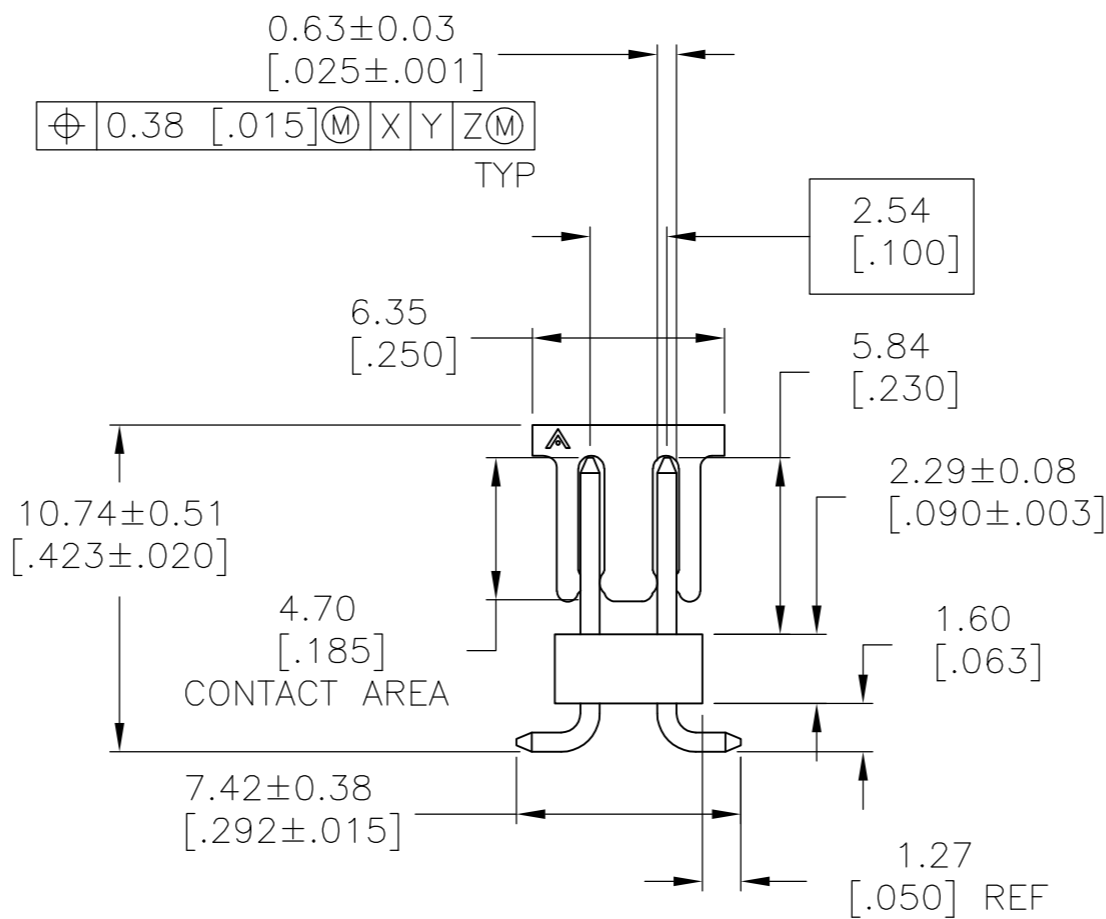
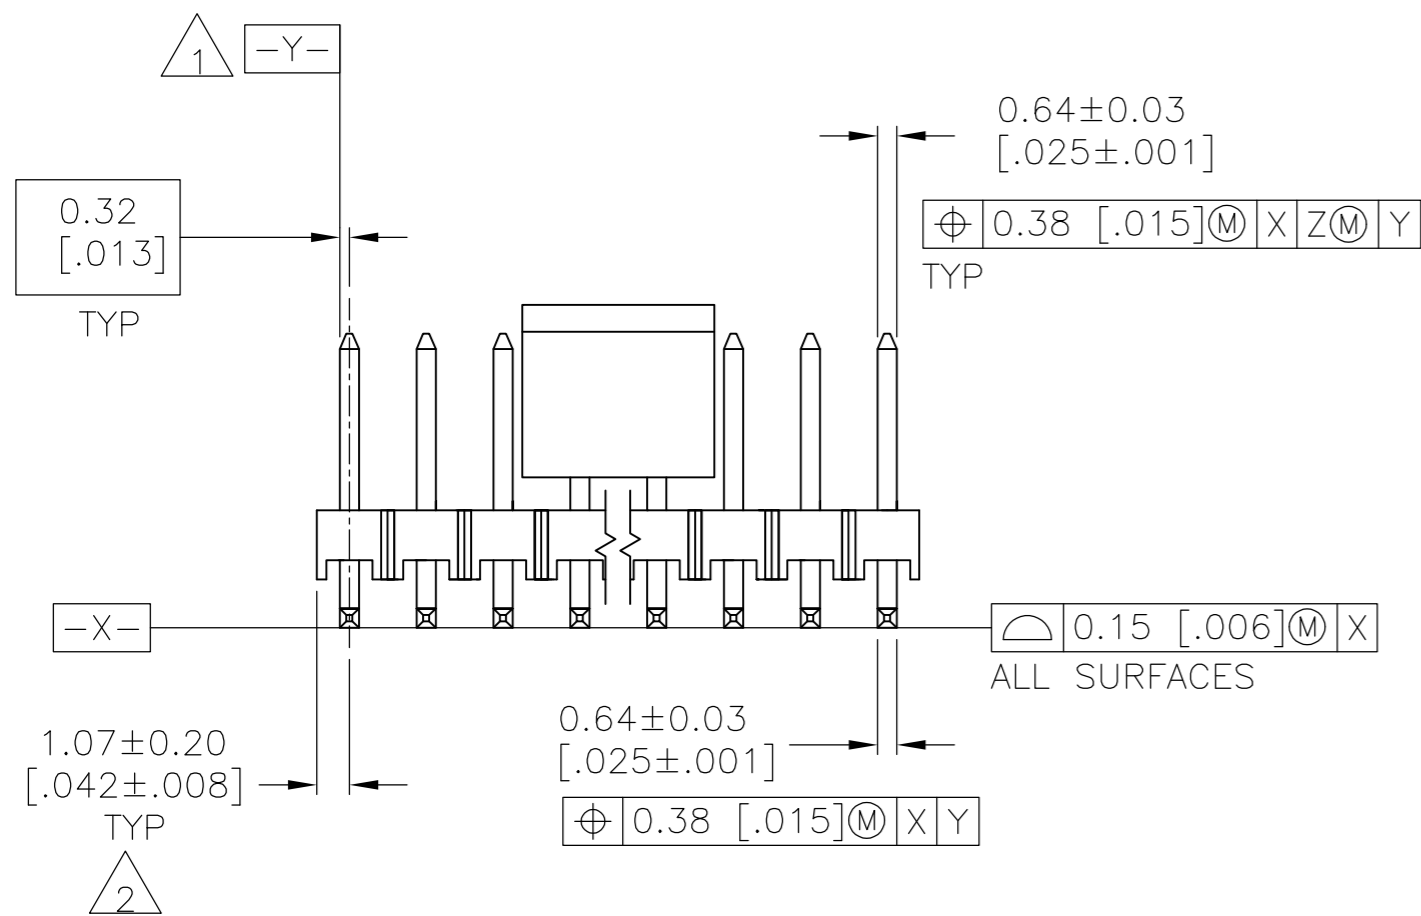


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
AD	00	R1	REVISED PER ECO-15-011938			24AUG2015	NK	MM

- 1 -Y- SHALL BE THE INTERSECTION OF THE POST AND THE HOUSING.
- 2 THE NOTED DIMENSION APPLIES FROM THE BASIC DIMENSION (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED.
- 3 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.
- 4 PACKAGED IN TAPE AND REEL PER EIA-481 SPECIFICATIONS. SEE TABLE FOR TAPE WIDTH.
- 5 HOUSING: LCP, COLOR-BLACK. POST: COPPER ALLOY. PICK AND PLACE CAP: PPA COLOR-BLACK.

- 6 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 7 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL.
- 8 OBSOLETE
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

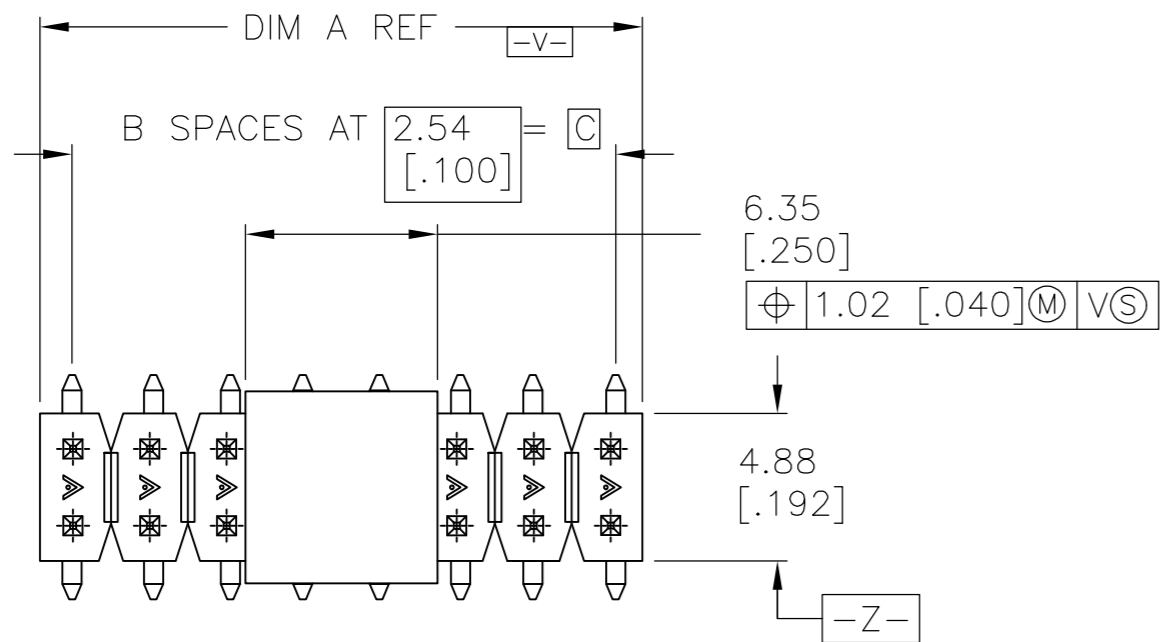

PLATING	TAPE WIDTH	C	B	A	NO. OF POSN	PART NUMBER	
6	7	-	30.48 [1.200]	14	32.61 [1.284]	30	6-147279-4
6	7	-	30.48 [1.200]	13	32.61 [1.284]	28	6-147279-3
6	7	-	30.48 [1.200]	10	32.61 [1.284]	22	6-147279-2
6	7	-	30.48 [1.200]	8	32.61 [1.284]	18	6-147279-1
	7	44mm	30.48 [1.200]	12	32.61 [1.284]	26	6-147279-0
	7	44mm	17.78 [0.700]	7	19.91 [0.784]	16	5-147279-9
9	7	24mm	12.7 [0.500]	5	14.83 [0.584]	12	5-147279-8
	7	24mm	7.62 [0.300]	3	9.75 [0.384]	8	5-147279-7
9	7	44mm	27.94 [1.100]	11	30.07 [1.184]	24	5-147279-6
	7	44mm	22.86 [0.900]	9	24.99 [0.984]	20	5-147279-5
	7	24mm	2.54 [0.100]	1	4.67 [0.184]	4	5-147279-4
	7	32mm	15.24 [0.600]	6	16.46 [0.684]	14	5-147279-3
	7	24mm	10.16 [0.400]	4	12.29 [0.484]	10	5-147279-2
	7	24mm	5.08 [0.200]	2	7.21 [0.284]	6	5-147279-1
8	7	24mm	5.08 [0.200]	2	7.21 [0.284]	6	1-147279-1
9	3	44mm	30.48 [1.200]	12	32.61 [1.284]	26	1-147279-0
	3	44mm	17.78 [0.700]	7	19.91 [0.784]	16	147279-9
9	3	24mm	12.7 [0.500]	5	14.83 [0.584]	12	147279-8
	3	24mm	7.62 [0.300]	3	9.75 [0.384]	8	147279-7
	3	44mm	27.94 [1.100]	11	30.07 [1.184]	24	147279-6
	3	44mm	22.86 [0.900]	9	24.99 [0.984]	20	147279-5
	3	24mm	2.54 [0.100]	1	4.67 [0.184]	4	147279-4
	3	32mm	15.24 [0.600]	6	16.46 [0.684]	14	147279-3
	3	24mm	10.16 [0.400]	4	12.29 [0.484]	10	147279-2
	3	24mm	5.08 [0.200]	2	7.21 [0.284]	6	147279-1

9 SUPERCEDED BY 6-147279-0

RECOMMENDED PCB LAYOUT FOR USE WITH 0.20 [.008] THICK STENCIL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN B. HAYMAKER 10JUL00	TE Connectivity
0 PLC ± -	1 PLC ± -	CHK J. GESFORD 10JUL00	
2 PLC ± -	3 PLC ± 0.13 [.005]	APVD J. GESFORD 10JUL00	NAME
4 PLC ± -	ANGLES ± -	PRODUCT SPEC	SURF. MT. HDR. ASSY, MOD II, B/W, VERT, D/R, .100 x .100 C/L, .025 SQ POST, W/ PICK AND PLACE CAP
MATERIAL	FINISH SEE TABLE	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		WEIGHT	A2 00779 C=147279
		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV R1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[147279-5](#)