




ISO9001:2008 Certified

**Mechanical Specifications (mm)**

D:	13.0	± max
T:	5.5	± max
Lead Diameter	0.8	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	6.00	± nom
C:	3.42	± nom

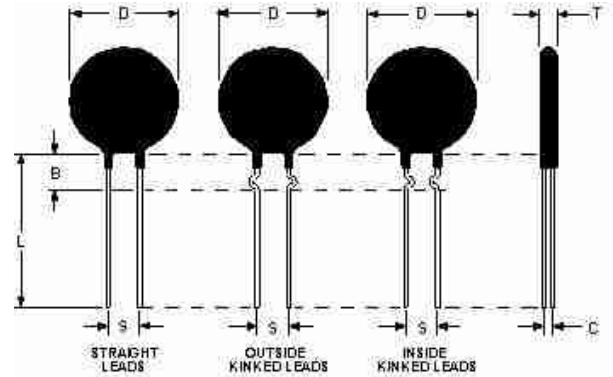

**Electrical Specifications**

Resistance:	25.0 Ω	± 20 %
Max Steady State Current upto 65°C:	2.00	A
Max Rec. Energy Rating:	30	J
Actual Failure Instantaneous Energy:	60	J
Maximum Capacitance @ 120 VAC:	2,083	µf
Maximum Capacitance @ 240 VAC:	520	µf
Resistance @ 100% Max Current:	0.55	Ω
Resistance @ 50% Max Current:	0.93	Ω
Body Temperature at 100% Max Current:	142.00	°c
Dissipation Constant:	12.7	mw/°c
Thermal Time Constant:	40	Sec.
Material Type (for Beta and Curve):	H	

<b>SL12 25002</b>	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SL12 25002](#)