
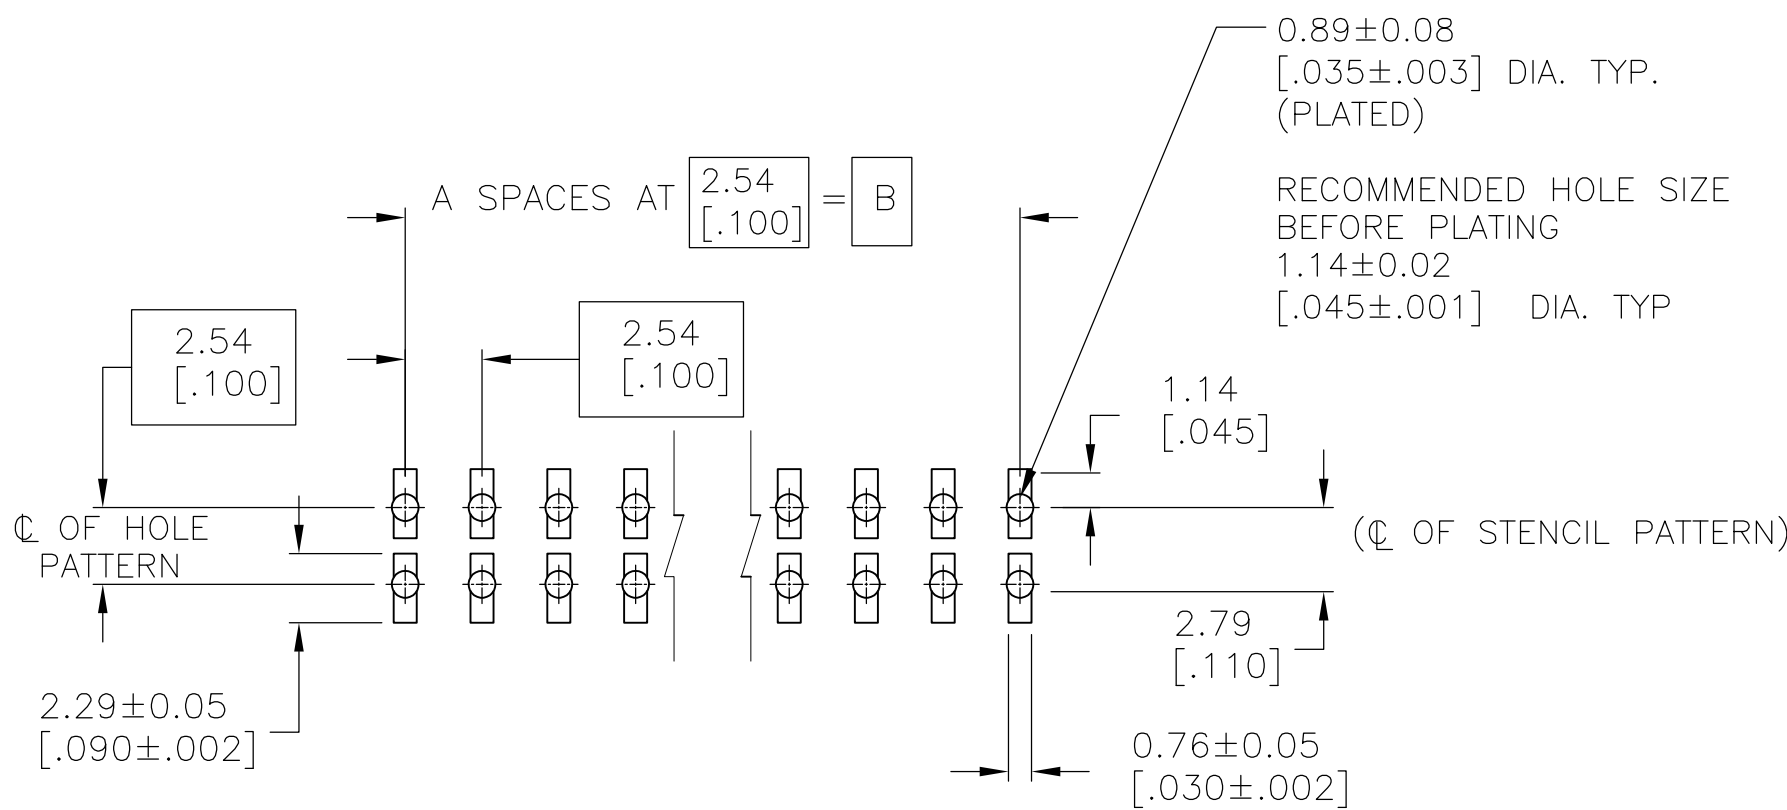


















7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO. T_1 HOFFMAN 08-05-95		 TE Connectivity		
		CHK. G. DUBNICZKI 24-10-95				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
mm [INCHES]		APPROV. G. DUBNICZKI 24-10-95		HEADER ASSEMBLY, MOD II ,		
		PRODUCT SPEC		BREAKAWAY, DOUBLE ROW,		
		APPLICATION SPEC		VERTICAL, HIGH TEMPERATURE		
		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
		A1		00779	C146256	
		WEIGHT		—		
MATERIAL		SEE TABLE		CUSTOMER DRAWING		
				SCALE 4:1 SHEET 1 OF 1 REV H		

		01.19 [3.984]	99.06 [3.900]	39	80	4-146256-0
		98.65 [3.884]	96.52 [3.800]	38	78	3-146256-9
		96.11 [3.784]	93.98 [3.700]	37	76	3-146256-8
		93.57 [3.684]	91.44 [3.600]	36	74	3-146256-7
		91.03 [3.584]	88.90 [3.500]	35	72	3-146256-6
		88.49 [3.484]	86.36 [3.400]	34	70	3-146256-5
		85.95 [3.384]	83.82 [3.300]	33	68	3-146256-4
		83.41 [3.284]	81.28 [3.200]	32	66	3-146256-3
		80.87 [3.184]	78.74 [3.100]	31	64	3-146256-2
		78.33 [3.084]	76.20 [3.000]	30	62	3-146256-1
		75.79 [2.984]	73.66 [2.900]	29	60	3-146256-0
		73.25 [2.884]	71.12 [2.800]	28	58	2-146256-9
		70.71 [2.784]	68.58 [2.700]	27	56	2-146256-8
		68.17 [2.684]	66.04 [2.600]	26	54	2-146256-7
		65.63 [2.584]	63.5 [2.500]	25	52	2-146256-6
		63.09 [2.484]	60.96 [2.400]	24	50	2-146256-5
		60.55 [2.384]	58.42 [2.300]	23	48	2-146256-4
		58.01 [2.284]	55.88 [2.200]	22	46	2-146256-3
		55.47 [2.184]	53.34 [2.100]	21	44	2-146256-2
		52.93 [2.084]	50.80 [2.000]	20	42	2-146256-1
		50.39 [1.984]	48.26 [1.900]	19	40	2-146256-0
		47.85 [1.884]	45.72 [1.800]	18	38	1-146256-9
		45.31 [1.784]	43.18 [1.700]	17	36	1-146256-8
		42.77 [1.684]	40.64 [1.600]	16	34	1-146256-7
		40.23 [1.584]	38.10 [1.500]	15	32	1-146256-6
		37.69 [1.484]	35.56 [1.400]	14	30	1-146256-5
		35.15 [1.384]	33.02 [1.300]	13	28	1-146256-4
		32.61 [1.284]	30.48 [1.200]	12	26	1-146256-3
		30.07 [1.184]	27.94 [1.100]	11	24	1-146256-2
		27.53 [1.084]	25.40 [1.000]	10	22	1-146256-1
		24.99 [.984]	22.86 [.900]	9	20	1-146256-0
		22.45 [.884]	20.32 [.800]	8	18	146256-9
		19.91 [.784]	17.78 [.700]	7	16	146256-8
		17.37 [.684]	15.24 [.600]	6	14	146256-7
		14.83 [.584]	12.70 [.500]	5	12	146256-6
		12.29 [.484]	10.16 [.400]	4	10	146256-5
		9.75 [.384]	7.62 [.300]	3	8	146256-4
		7.21 [.284]	5.08 [.200]	2	6	146256-3
		4.67 [.184]	2.54 [.100]	1	4	146256-2
		2.13 [.084]	- [-]	0	2	146256-1
	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[146256-6](#)