
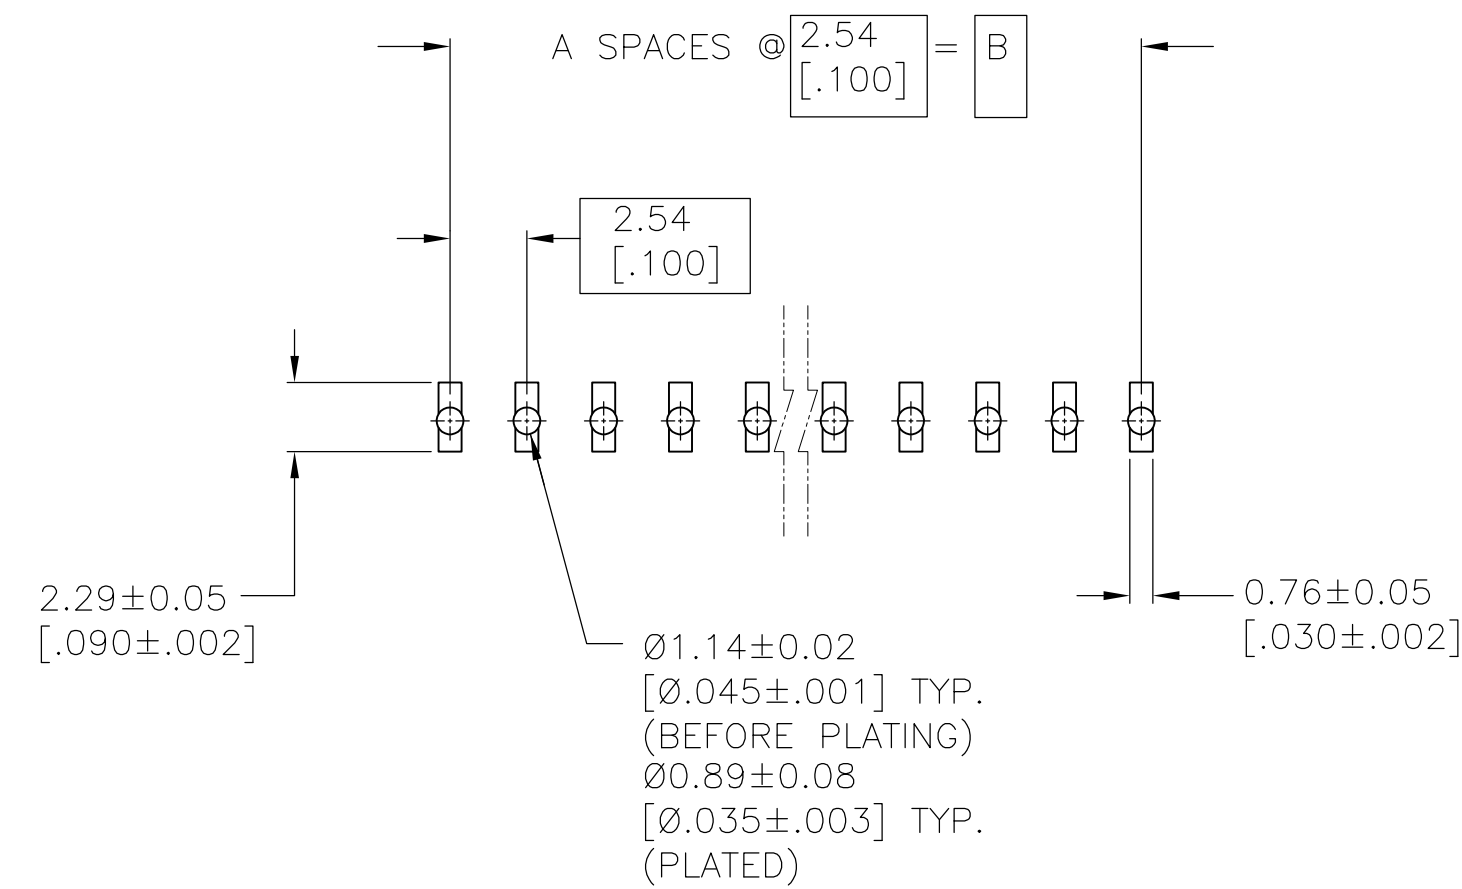


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN,
THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 0.00254-0.00504 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.
- 4 HOUSING: LCP, COLOR-BLACK.
POSTS: COPPER ALLOY.
- 5 0.00254-0.00504 [.000100-.000200] MATTE TIN ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

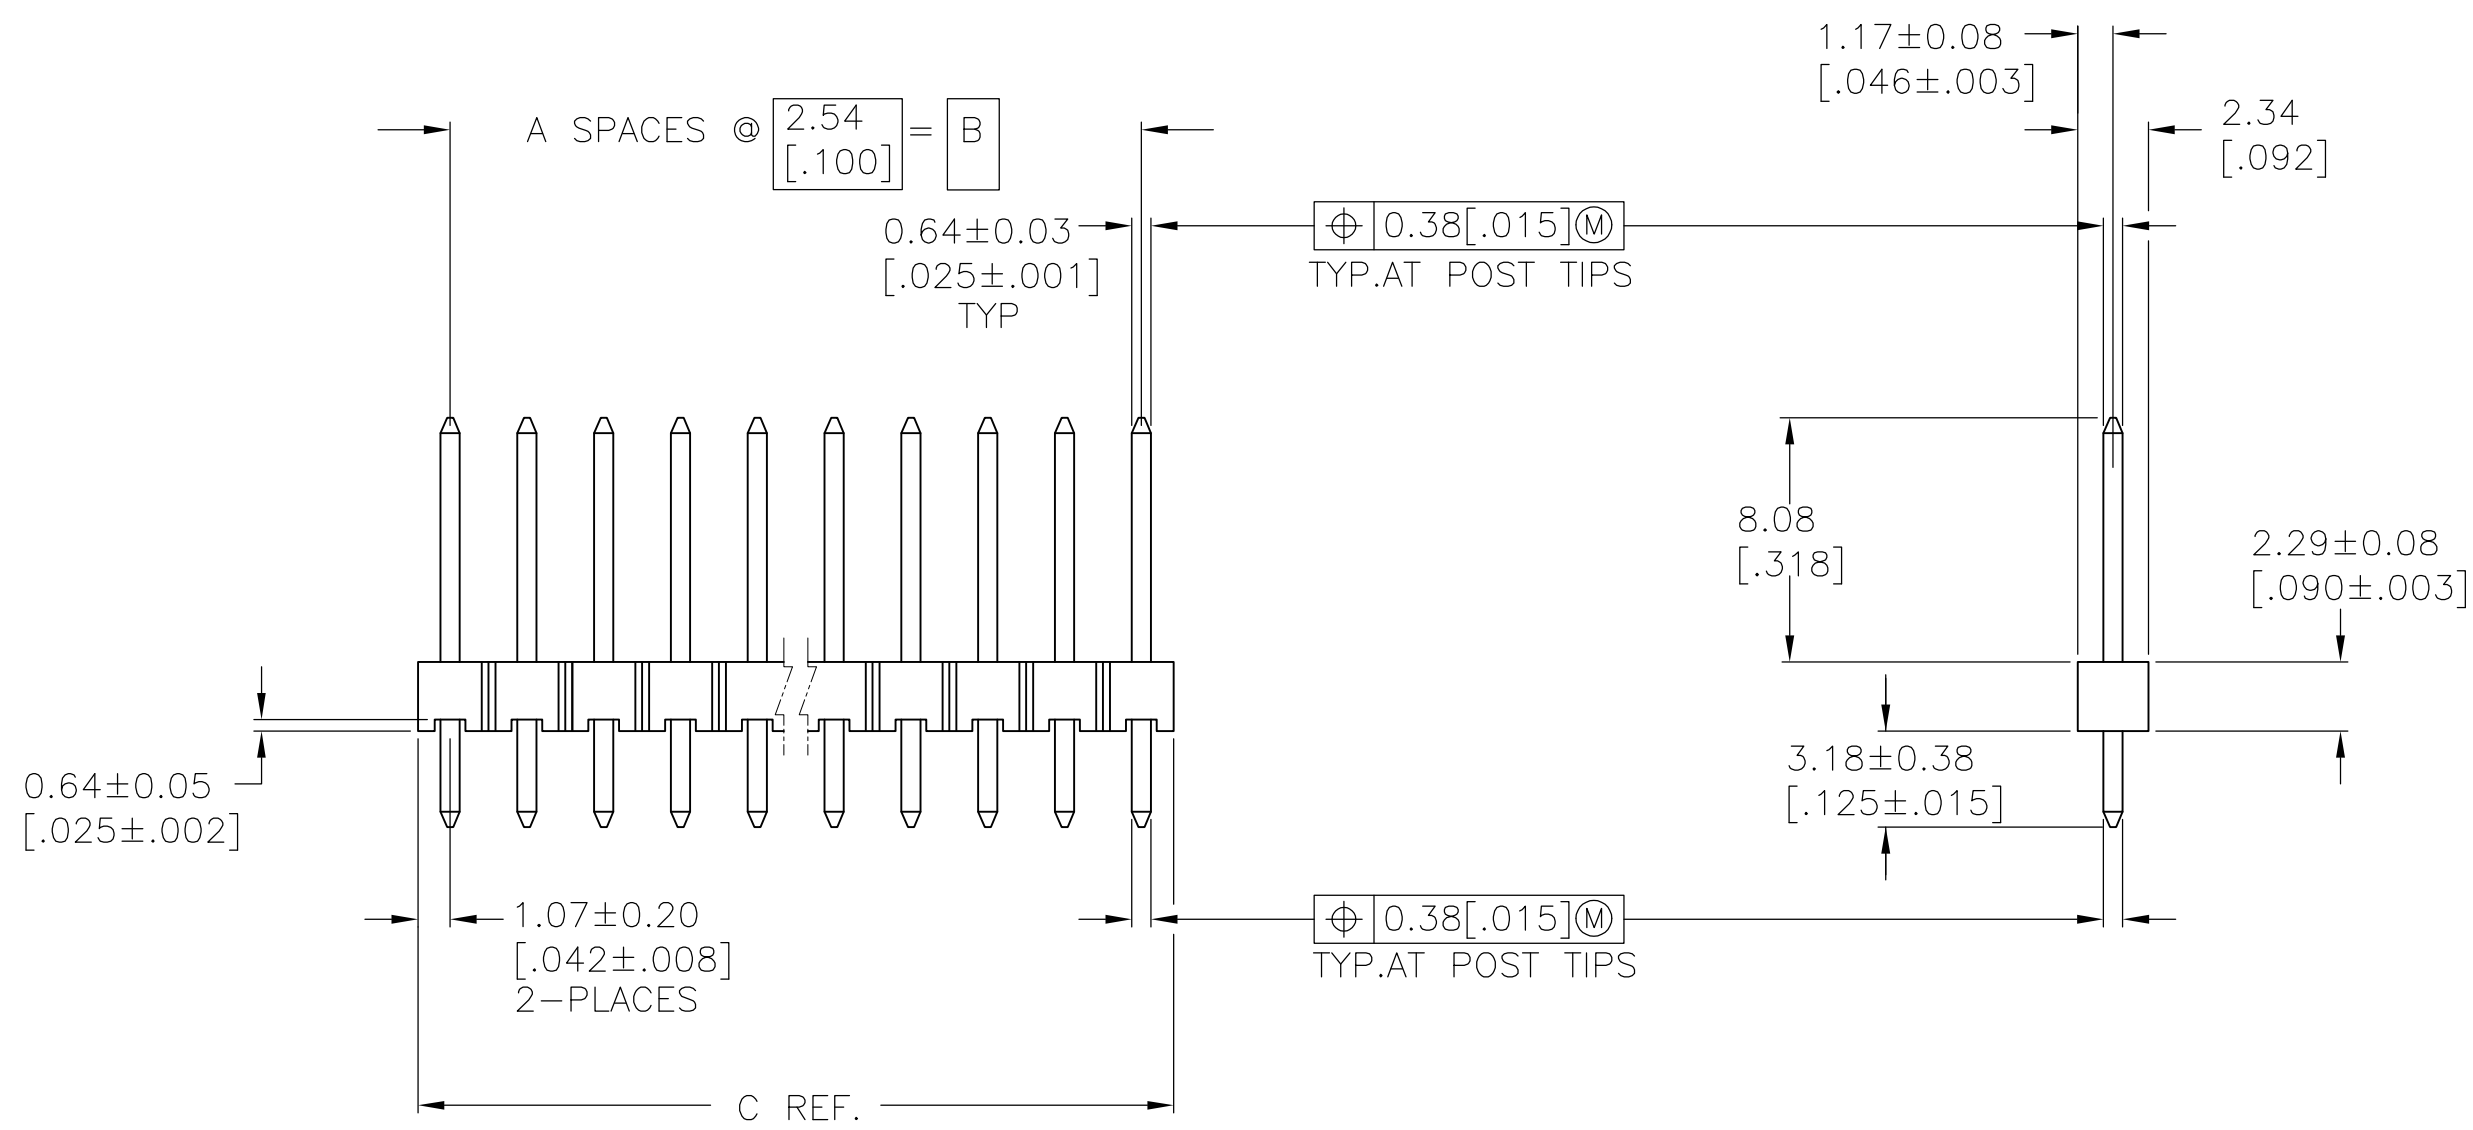

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063 [1.60] THICK PC BOARD AND
.012 [.305] STENCIL THICK.

			101.19 [3.984]	99.06 [3.900]	39	40	9-146274-0	
OBSOLETE			98.65 [3.884]	96.52 [3.800]	38	39	8-146274-9	
			96.11 [3.784]	93.98 [3.700]	37	38	8-146274-8	
			93.57 [3.684]	91.44 [3.600]	36	37	8-146274-7	
OBSOLETE			91.03 [3.584]	88.90 [3.500]	35	36	8-146274-6	
			88.49 [3.484]	86.36 [3.400]	34	35	8-146274-5	
			85.95 [3.384]	83.82 [3.300]	33	34	8-146274-4	
			83.41 [3.284]	81.28 [3.200]	32	33	8-146274-3	
			80.87 [3.184]	78.74 [3.100]	31	32	8-146274-2	
			78.33 [3.084]	76.20 [3.000]	30	31	8-146274-1	
			75.79 [2.984]	73.66 [2.900]	29	30	8-146274-0	
			73.25 [2.884]	71.12 [2.800]	28	29	7-146274-9	
			70.71 [2.784]	68.58 [2.700]	27	28	7-146274-8	
			68.17 [2.684]	66.04 [2.600]	26	27	7-146274-7	
OBSOLETE			65.63 [2.584]	63.5 [2.500]	25	26	7-146274-6	
			63.09 [2.484]	60.96 [2.400]	24	25	7-146274-5	
			60.55 [2.384]	58.42 [2.300]	23	24	7-146274-4	
OBSOLETE			58.01 [2.284]	55.88 [2.200]	22	23	7-146274-3	
			55.47 [2.184]	53.34 [2.100]	21	22	7-146274-2	
			52.93 [2.084]	50.80 [2.000]	20	21	7-146274-1	
OBSOLETE	△5		50.39 [1.984]	48.26 [1.900]	19	20	7-146274-0	
				47.85 [1.884]	45.72 [1.800]	18	19	6-146274-9
				45.31 [1.784]	43.18 [1.700]	17	18	6-146274-8
OBSOLETE			42.77 [1.684]	40.64 [1.600]	16	17	6-146274-7	
			40.23 [1.584]	38.10 [1.500]	15	16	6-146274-6	
			37.69 [1.484]	35.56 [1.400]	14	15	6-146274-5	
			35.15 [1.384]	33.02 [1.300]	13	14	6-146274-4	
			32.61 [1.284]	30.48 [1.200]	12	13	6-146274-3	
OBSOLETE			30.07 [1.184]	27.94 [1.100]	11	12	6-146274-2	
			27.53 [1.084]	25.40 [1.000]	10	11	6-146274-1	
			24.99 [.984]	22.86 [.900]	9	10	6-146274-0	
OBSOLETE			22.45 [.884]	20.32 [.800]	8	9	5-146274-9	
			19.91 [.784]	17.78 [.700]	7	8	5-146274-8	
			17.37 [.684]	15.24 [.600]	6	7	5-146274-7	
			14.83 [.584]	12.70 [.500]	5	6	5-146274-6	
			12.29 [.484]	10.16 [.400]	4	5	5-146274-5	
			9.75 [.384]	7.62 [.300]	3	4	5-146274-4	
			7.21 [.284]	5.08 [.200]	2	3	5-146274-3	
			4.67 [.184]	2.54 [.100]	1	2	5-146274-2	
			2.13 [.084]	- [-]	0	1	5-146274-1	
		PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. HOFFMAN 6/12/95		 TE Connectivity	
		CHK G. DUBNICZKI 6/29/95			
DIMENSIONS: mm [INCHES]		TOLERANCES (UNLESS OTHERWISE SPECIFIED)		NAME	
		APPROV G. DUBNICZKI 6/29/95		HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL	
		PRODUCT SPEC			
		APPLICATION SPEC			
		SIZE		CAGE CODE	
		DRAWING NO		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT	
		SEE TABLE		A1 00779	
		CUSTOMER DRAWING		SCALE 4:1	
				SHEET 1 OF 1	
				REV H1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-146274-5](#)