
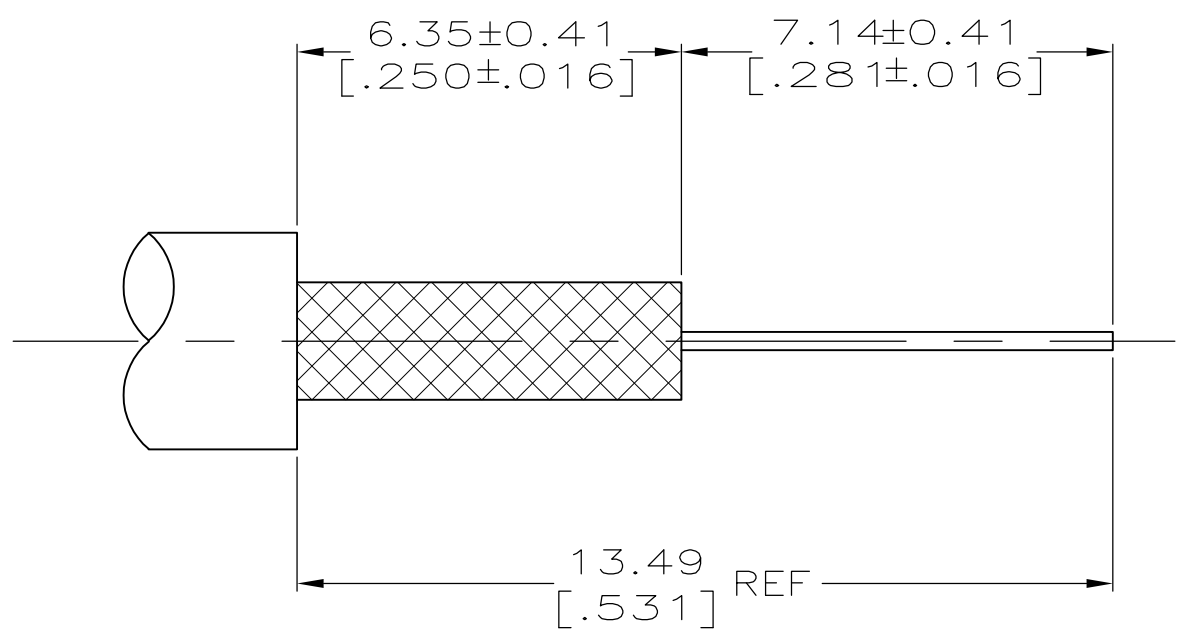
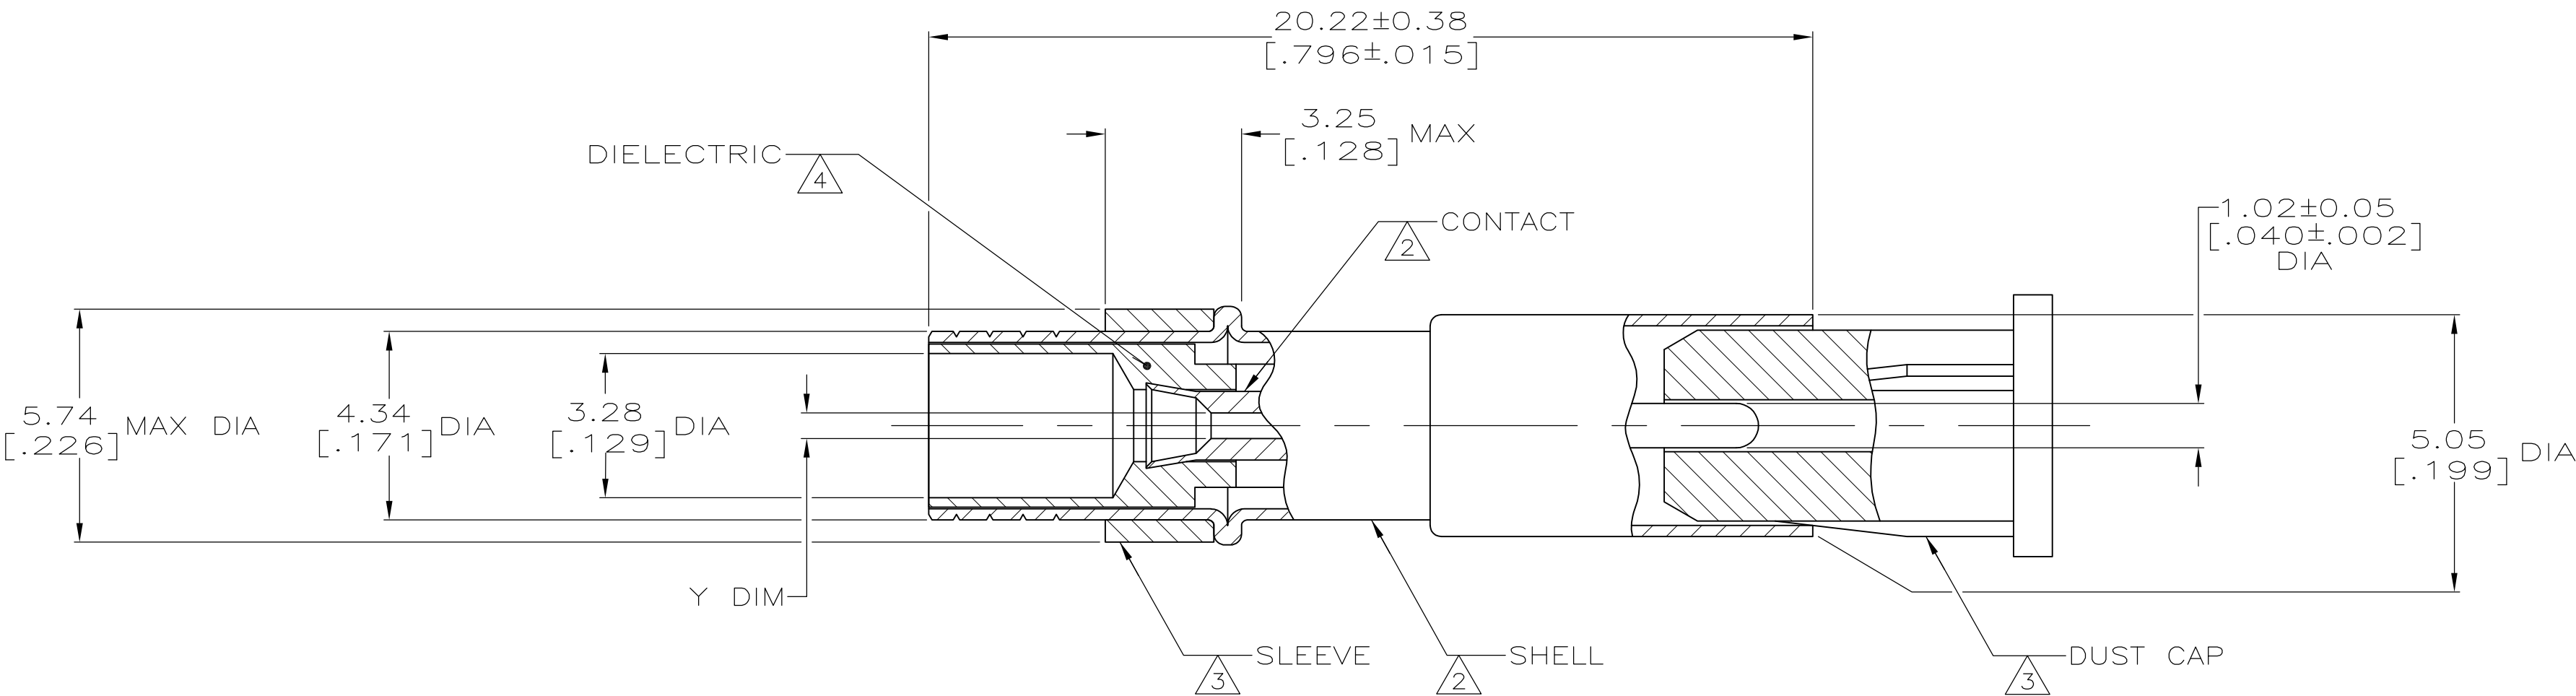


1. SEE IS 1770
2. BRASS PER QQ-B-626
3. NYLON PER ASTM-D-4066, NATURAL.
4. POLYMETHYLPENTENE GENERAL PURPOSE.
5. .000030 MINIMUM GOLD PER MIL-G-45204.
6. .000100 MINIMUM GOLD PER MIL-G-45204.



RECOMMENDED STRIP LENGTH

OBSOLETE	5	6	.042±.003	1-201146-0
	6	6	.042±.003	201146-9
SUPERSEDED BY 201146-2	5	5	.023±.003	201146-6
	5	5	.042±.003	201146-4
	5	5	.023±.003	201146-2
SUPERSEDED BY 201146-4	5	5	.042±.003	201146-1

		CONTACT PLATING		SHELL PLATING		"Y" DIM		PART NUMBER							
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN B. WERNER 8-9-94		STE TE Connectivity									
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK J. McLEOD 8-9-94						NAME					
				APVD J. McLEOD 8-9-94											
		PRODUCT SPEC		SOCKET. MINIATURE SERIES											
		—													
		APPLICATION SPEC													
		—													
MATERIAL		FINISH		WEIGHT		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
1 2 3 4		5 6		—		A1		00779		C=201146		—			
CUSTOMER DRAWING										SCALE 8:1		SHEET 1 of 1		REV BL	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[201146-2](#)