

ASA Series

6 Watts

Total Power: 6 Watts
Input Voltage: 12V, 24V or 48V
of Outputs: Single, Dual

Special Features

- Encapsulated
- Wide 4:1 input range
- 1.25" X 0.8" DIP package
- 1500Vdc I/O isolation
- Single and Dual output



Electrical Specifications

| Input | |
|--------------------------|---|
| Input range | 9 to 36 VDC; 18 to 75 VDC |
| Efficiency ² | 81%@5Vo |
| Output | |
| Voltage tolerance | ±2.0% |
| Line regulation | ±0.5% |
| Load regulation | Single output: 1% @ 3.3Vo Other: ± 0.5% Dual output: ± 3.0% |
| Noise/ripple | 3.3Vo, 5Vo: 100mV 12Vo: 120mV 15Vo: 150mV |
| Short circuit protection | Auto-restart |
| Switching frequency | 250KHz |
| Temperature coefficient | ±0.02 /°C |
| Isolation | |
| I/O isolation | 1500 VDC min. |
| Insulation resistance | 10Mohm |
| Insulation capacitance | 1000pF |

Environmental Specifications

| | |
|-------------------------------------|------------------------------|
| Operating ambient temperature range | -40°C to +71°C (no derating) |
| Storage temperature | -55°C to +105°C |
| Humidity | 5% to 95% (non-condensing) |
| MTBF | 1 Mhrs demonstrated MTBF |
| RoHS Compliant | |

Safety

CE Mark





Ordering Information

| Input Voltage | Output 1 Voltage | Output 2 Voltage | Maximum Power | Model Number |
|---------------|------------------|------------------|---------------|--------------|
| 9-3 6V | 3.3V @ 1.2A | | 3.96W | ASA01F18-L |
| 9-3 6V | 5V @ 1.00A | | 5W | ASA01A18-L |
| 9-3 6V | 12V @ 0.50A | | 6W | ASA00B18-L |
| 9-3 6V | 15V @ 0.40A | | 6W | ASA00C18-L |
| 9-3 6V | 5V @ 0.50A | -5V @ 0.5A | 5W | ASA00AA18-L |
| 9-3 6V | 12V @ 0.25A | -12V @ 0.25A | 6W | ASA00BB18-L |
| 9-3 6V | 15V @ 0.20A | -15V @ 0.20A | 6W | ASA00CC18-L |
| 18 - 75V | 3.3V @ 1.2A | | 3.96W | ASA01F36-L |
| 18 - 75V | 5V @ 1.00A | | 5W | ASA01A36-L |
| 18 - 75V | 12V @ 0.50A | | 6W | ASA00B36-L |
| 18 - 75V | 15V @ 0.40A | | 6W | ASA00C36-L |
| 18 - 75V | 5V @ 0.50A | -5V @ 0.5A | 5W | ASA00AA36-L |
| 18 - 75V | 12V @ 0.25A | -12V @ 0.25A | 6W | ASA00BB36-L |
| 18 - 75V | 15V @ 0.20A | -15V @ 0.20A | 6W | ASA00CC36-L |

Please contact Astec for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.

Mechanical Drawing

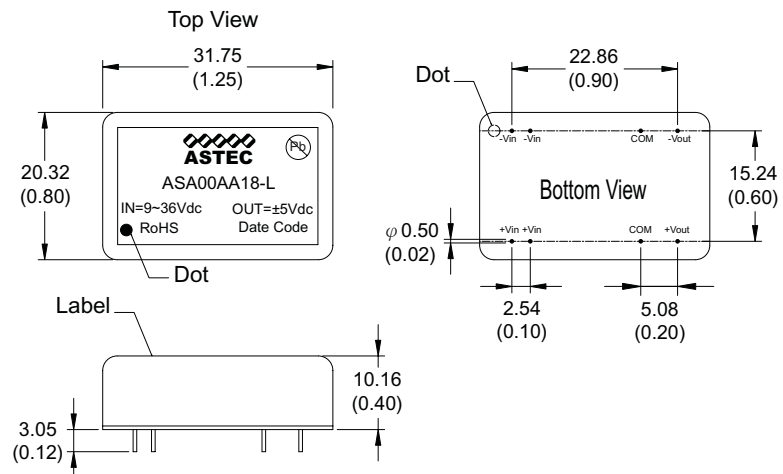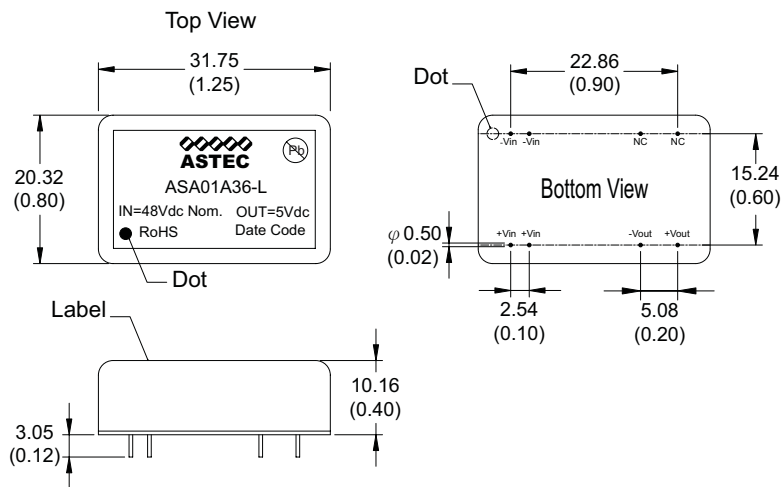

Notes:

1. All specifications subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 1 yr
3. Label and logo appearance may vary from what is shown on mechanical drawings.

Astec Power

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698
Technical Support: +1 888 41 ASTEC
or +1 407 241 2752

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Units 2111-2116, Level 21
Tower 1, Metroplaza
223, Hing Fong Road
Kwai Fong, New Territories
Hong Kong
Telephone: +852 2437 9662
Facsimile: +852 2402 4426

For global contact, visit:

www.astecpower.com
technicalsupport@astec.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Astec Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in USA

Emerson Network Power.
The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2006 Emerson Electric Co.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Artesyn Embedded Technologies:

[ASA00B36-LS](#) [ASA00CC36-LS](#) [ASA00BB36-LS](#) [ASA01F18-LS](#) [ASA00AA18-LS](#) [ASA00CC18-LS](#) [ASA01A36-LS](#)
[ASA00B18-LS](#) [ASA00BB18-LS](#) [ASA01A18-LS](#) [ASA01F36-LS](#) [ASA00C18-LS](#) [ASA00C36-LS](#)