

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0014562203](#)
Status: **Active**
Overview: [SL Modular Connectors](#)
Description: 2.54mm Pitch SL Insulation Displacement Connector Assembly, Female, Single Row, Version A, Non-polarized, Wire Size 26 AWG, 0.38µm Gold (Au), 20 Circuits

Documents:

3D Model	Product Specification TS-70541-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-0001-001 (PDF)
Product Specification PS-70400-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Ribbon Cable / Wire Trap Connectors
Series	70400
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Capable	No
Overview	SL Modular Connectors
Product Name	SL
UPC	800754993500

Physical


Circuits (Loaded)	20
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Net Weight	7.219/g
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm max.
Wire Size AWG	26
Wire/Cable Type	Discrete Wire, Ribbon Cable

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

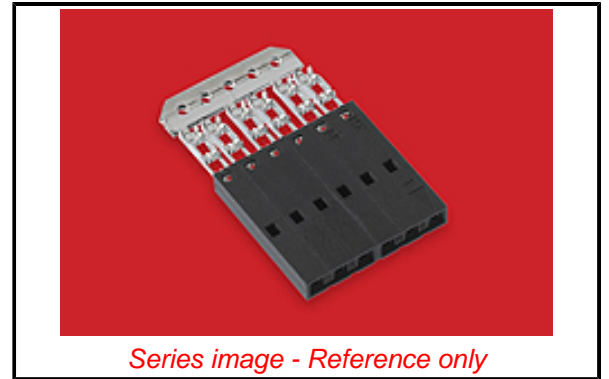

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[70400 Series](#)

Mates With

Single Row Headers and Housings, [8624](#) , [70203](#) , [42375](#) , [42377](#)

Use With

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

IDT - Semi-automatic	11200949
- Bench-Top Terminator	

Material Info

Engineering Number

70400-0719

Reference - Drawing Numbers

Packaging Specification

PK-70873-0001-001

Product Specification

PS-70400-001, TS-70541-001-001

Sales Drawing

SDA-70400-0701-0724

IDT Discrete	<u>621000700</u>
Handtool Module	
Ribbon Cable Tool	<u>622016600</u>
Kit, Press Not	
Included	
Hawk Ribbon Cable	<u>623003000</u>
Terminator without	
Break-off	
Hawk Semi-	<u>623003100</u>
Automatic Discrete	
Wire Terminator	
Hawk Semi-	<u>623004900</u>
Automatic Discrete	
Wire Terminator	
for Rebuilt CE	
Approved*	
Hawk Flat Flex Cable	<u>623005200</u>
Terminator with	
Break-off	
Hawk Ribbon Cable	<u>623005300</u>
Terminator with	
Break-off	

This document was generated on 11/23/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[14-56-2203](#)