

REV	BY	DESCRIPTION	DATE	OWN	APPD
C		EC 0G3C 0789 04	05FEB05	BSV	JLG
D		REVISED PER ECO-17-002209	12APR2017	BDA	MM

- 1

.00038[.000015] GOLD IN THE CONTACT AREA, .00254[.000100] MATTE TIN-LEAD ON REMAINDER OF CONTACT, ALL OVER .00127[.000050] NICKEL.
- 2

POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3

THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- 4

ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS.
ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
- 5





MATERIAL: HOUSING: FLAME RETARDANT LCP, COLOR - BLACK.
CONTACTS: BRASS.
- 6

SELECT POST TAILS FORMED TO PROVIDE CONNECTOR HOLD DOWN UNTIL SOLDERED. CONFIGURATION ACCEPTS 0.69[.027]-2.03[.080] THICK PRINTED CIRCUIT BOARD. (SEE DETAIL Z).
- 7

.00038[.000015] GOLD IN THE CONTACT AREA, .00254[.000100] MATTE TIN ON REMAINDER OF CONTACT, ALL OVER .00127[.000050] NICKEL.
- 8

HIGH TEMPERATURE CONFIGURATION
- 9

STANDOFFS NOT PRESENT ON UNDERSIDE OF ASSEMBLY

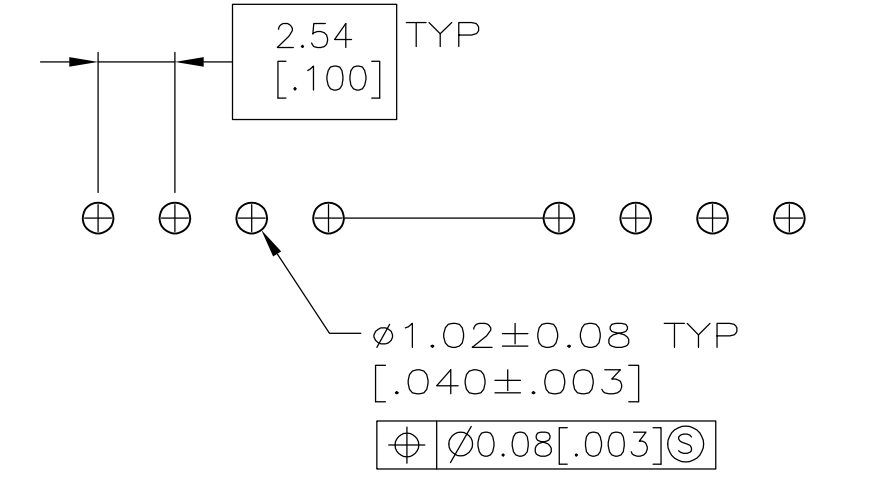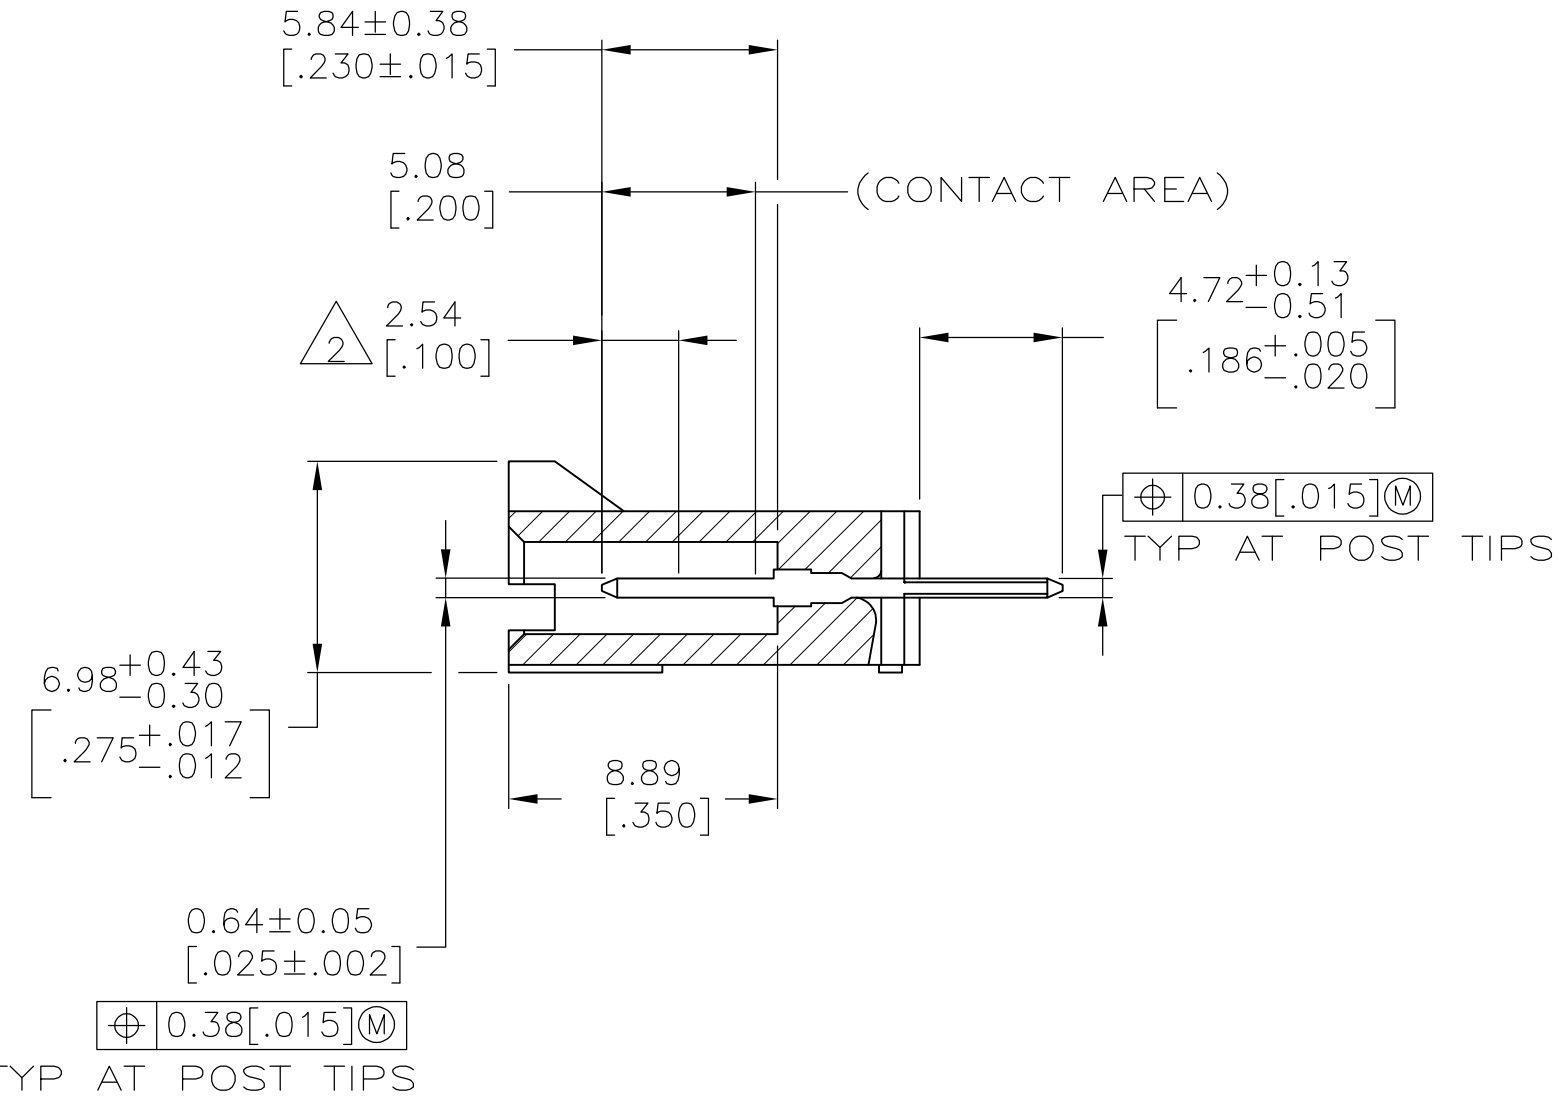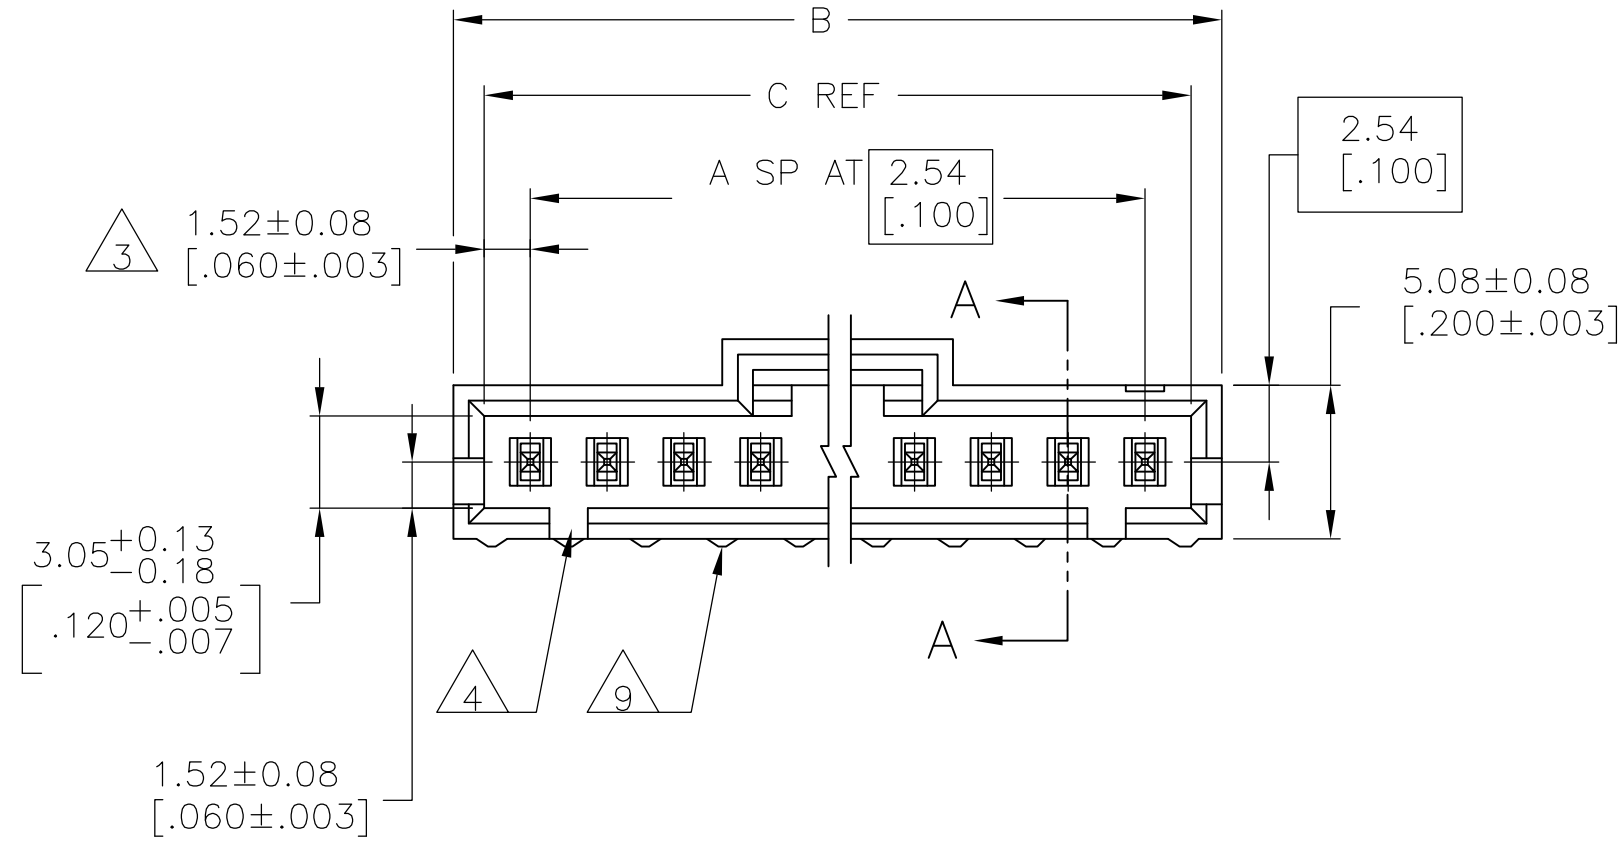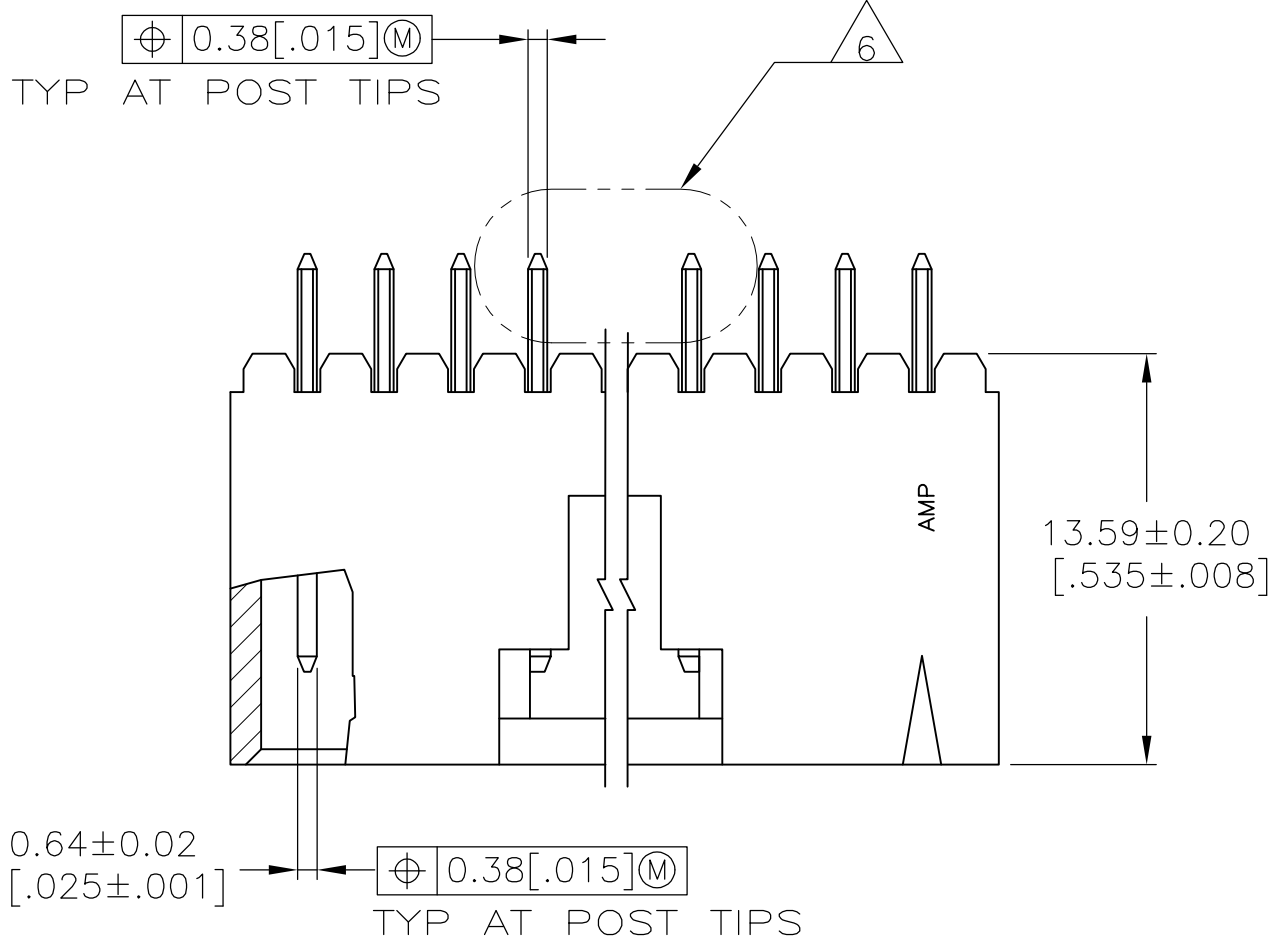

8	9	7	41.15 [1.620]	43.05 [1.695]	15	16	5-104966-1
8	1	1	41.15 [1.620]	43.05 [1.695]	15	16	104966-1
REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. BRANDBERG CHK J. GESFORD APPD J. GESFORD	16-AUG-96 16-AUG-96 16-AUG-96	TE Connectivity			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-25034 APPLICATION SPEC 114-25026		HDR ASSY, VERT, SINGLE ROW 2.54[.100]CL, 0.64[.025] SQ POST,WITH PLZN LATCHING & RETENTIVE POSTS, AMPMODU MTE			
MATERIAL 5		SEE TABLE		SIZE CAGE CODE DRAWING NO A1 00779 104966			
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1 REV D			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104966-1](#)