


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	8 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	3/4 in.
Stud Size	#10
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	RED
Panduit Die Index No. on Barrel	P21
Alternate Industry Die Index No. () on Barrel	N/A



Technical drawing of a Panduit 8 STR/FLEX LC CX8-10BF connector. The drawing shows a side view of the connector with dimensions and labels. The top dimension is $.41 \pm .04$. The bottom dimension is $.23 \pm .04$. The length of the main body is $.75 \pm .02$. The diameter of the end ferrule is $.20 \pm .02$ DIA (2) PLS. The label on the connector reads: PANDUIT, 8 STR/FLEX, LC CX8-10BF. A wire inspection window is indicated at the end of the connector.

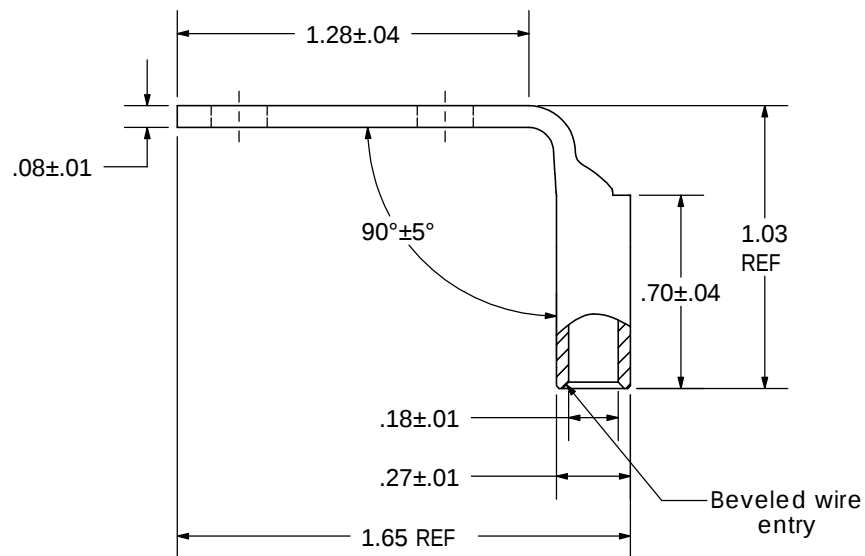

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCCX8-10BF-L
Copper Lug - Two-Hole, Long Flex Barrel with Window, 90° Angle Tongue

SCALE N/A	DRAWING NO / CAD FILE LCCX8-10BF-CUST
--------------	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCCX8-10BF-L](#)