

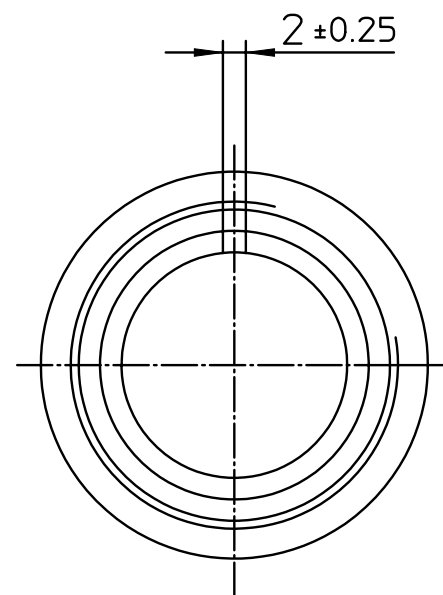


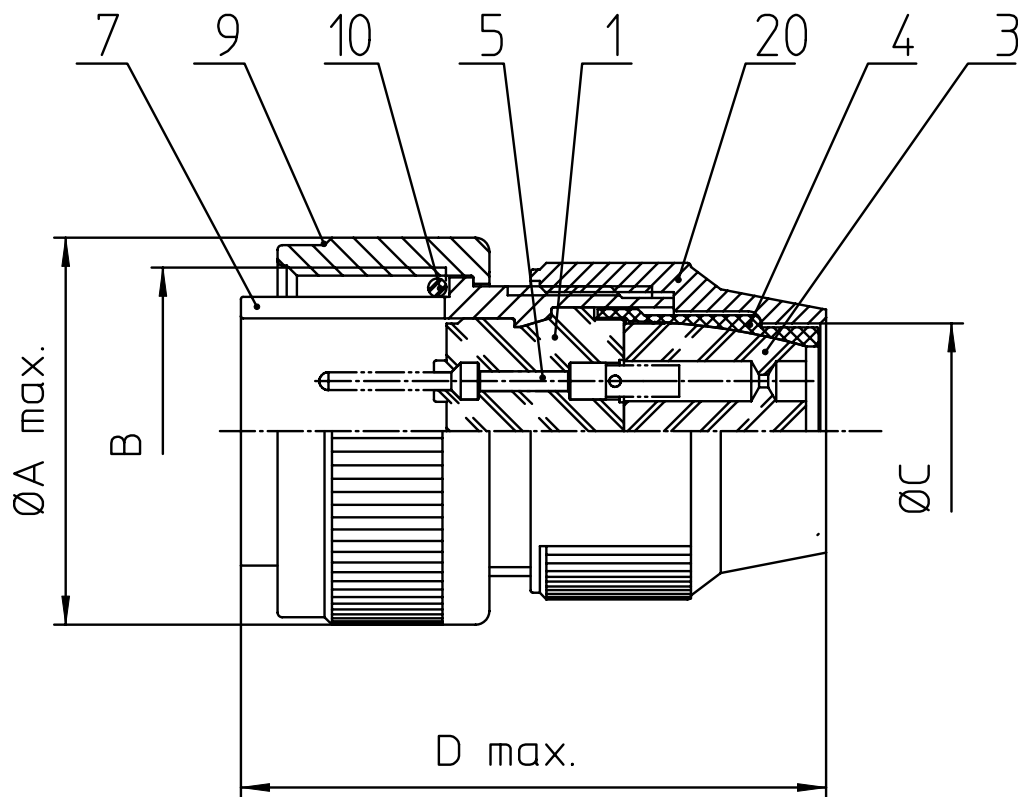

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 37,4              |
| B   | 1 1/4-18NEF-2A    |
| C   | 22                |
| D   | 53                |

| NO. | BESCHREIBUNG / DESCRIPTION           |
|-----|--------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN  |
| 3   | DICHTKÖRPER / GROMMET                |
| 4   | ENDRING / ENDRING                    |
| 5   | KONTAKTSTIFT/ CONTACT PIN            |
| 7   | ZYLINDERGHÄUSE / BARREL              |
| 9   | ÜBERWURFMUTTER / COUPLING NUT        |
| 10  | DICHTRING FRONT / FRONT SEALING RING |
| 20  | KURZES ENDGEHÄUSE / SHORT ENDBELL    |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                                  |
|---------------------|--------------------------------------------------|
| Shell Material:     | Aluminium alloy                                  |
| Shell Plating:      | Olive drab chromate coating over cadmium plating |
| Insulator Material: | Neoprene                                         |
| Contact Material:   | Copper alloy                                     |
| Contact Plating:    | Hard silver                                      |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description CA3106R20-27P-F80-F0  
Plug, straight  
Shortened light-weight endbell without cable clamp  
AWG Crimp / Pin / Layout: 20-27

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page 1/1

revision 1041 28. Oct 20