



 1. RECOMMENDED SPARE PARTS.

2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.

3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

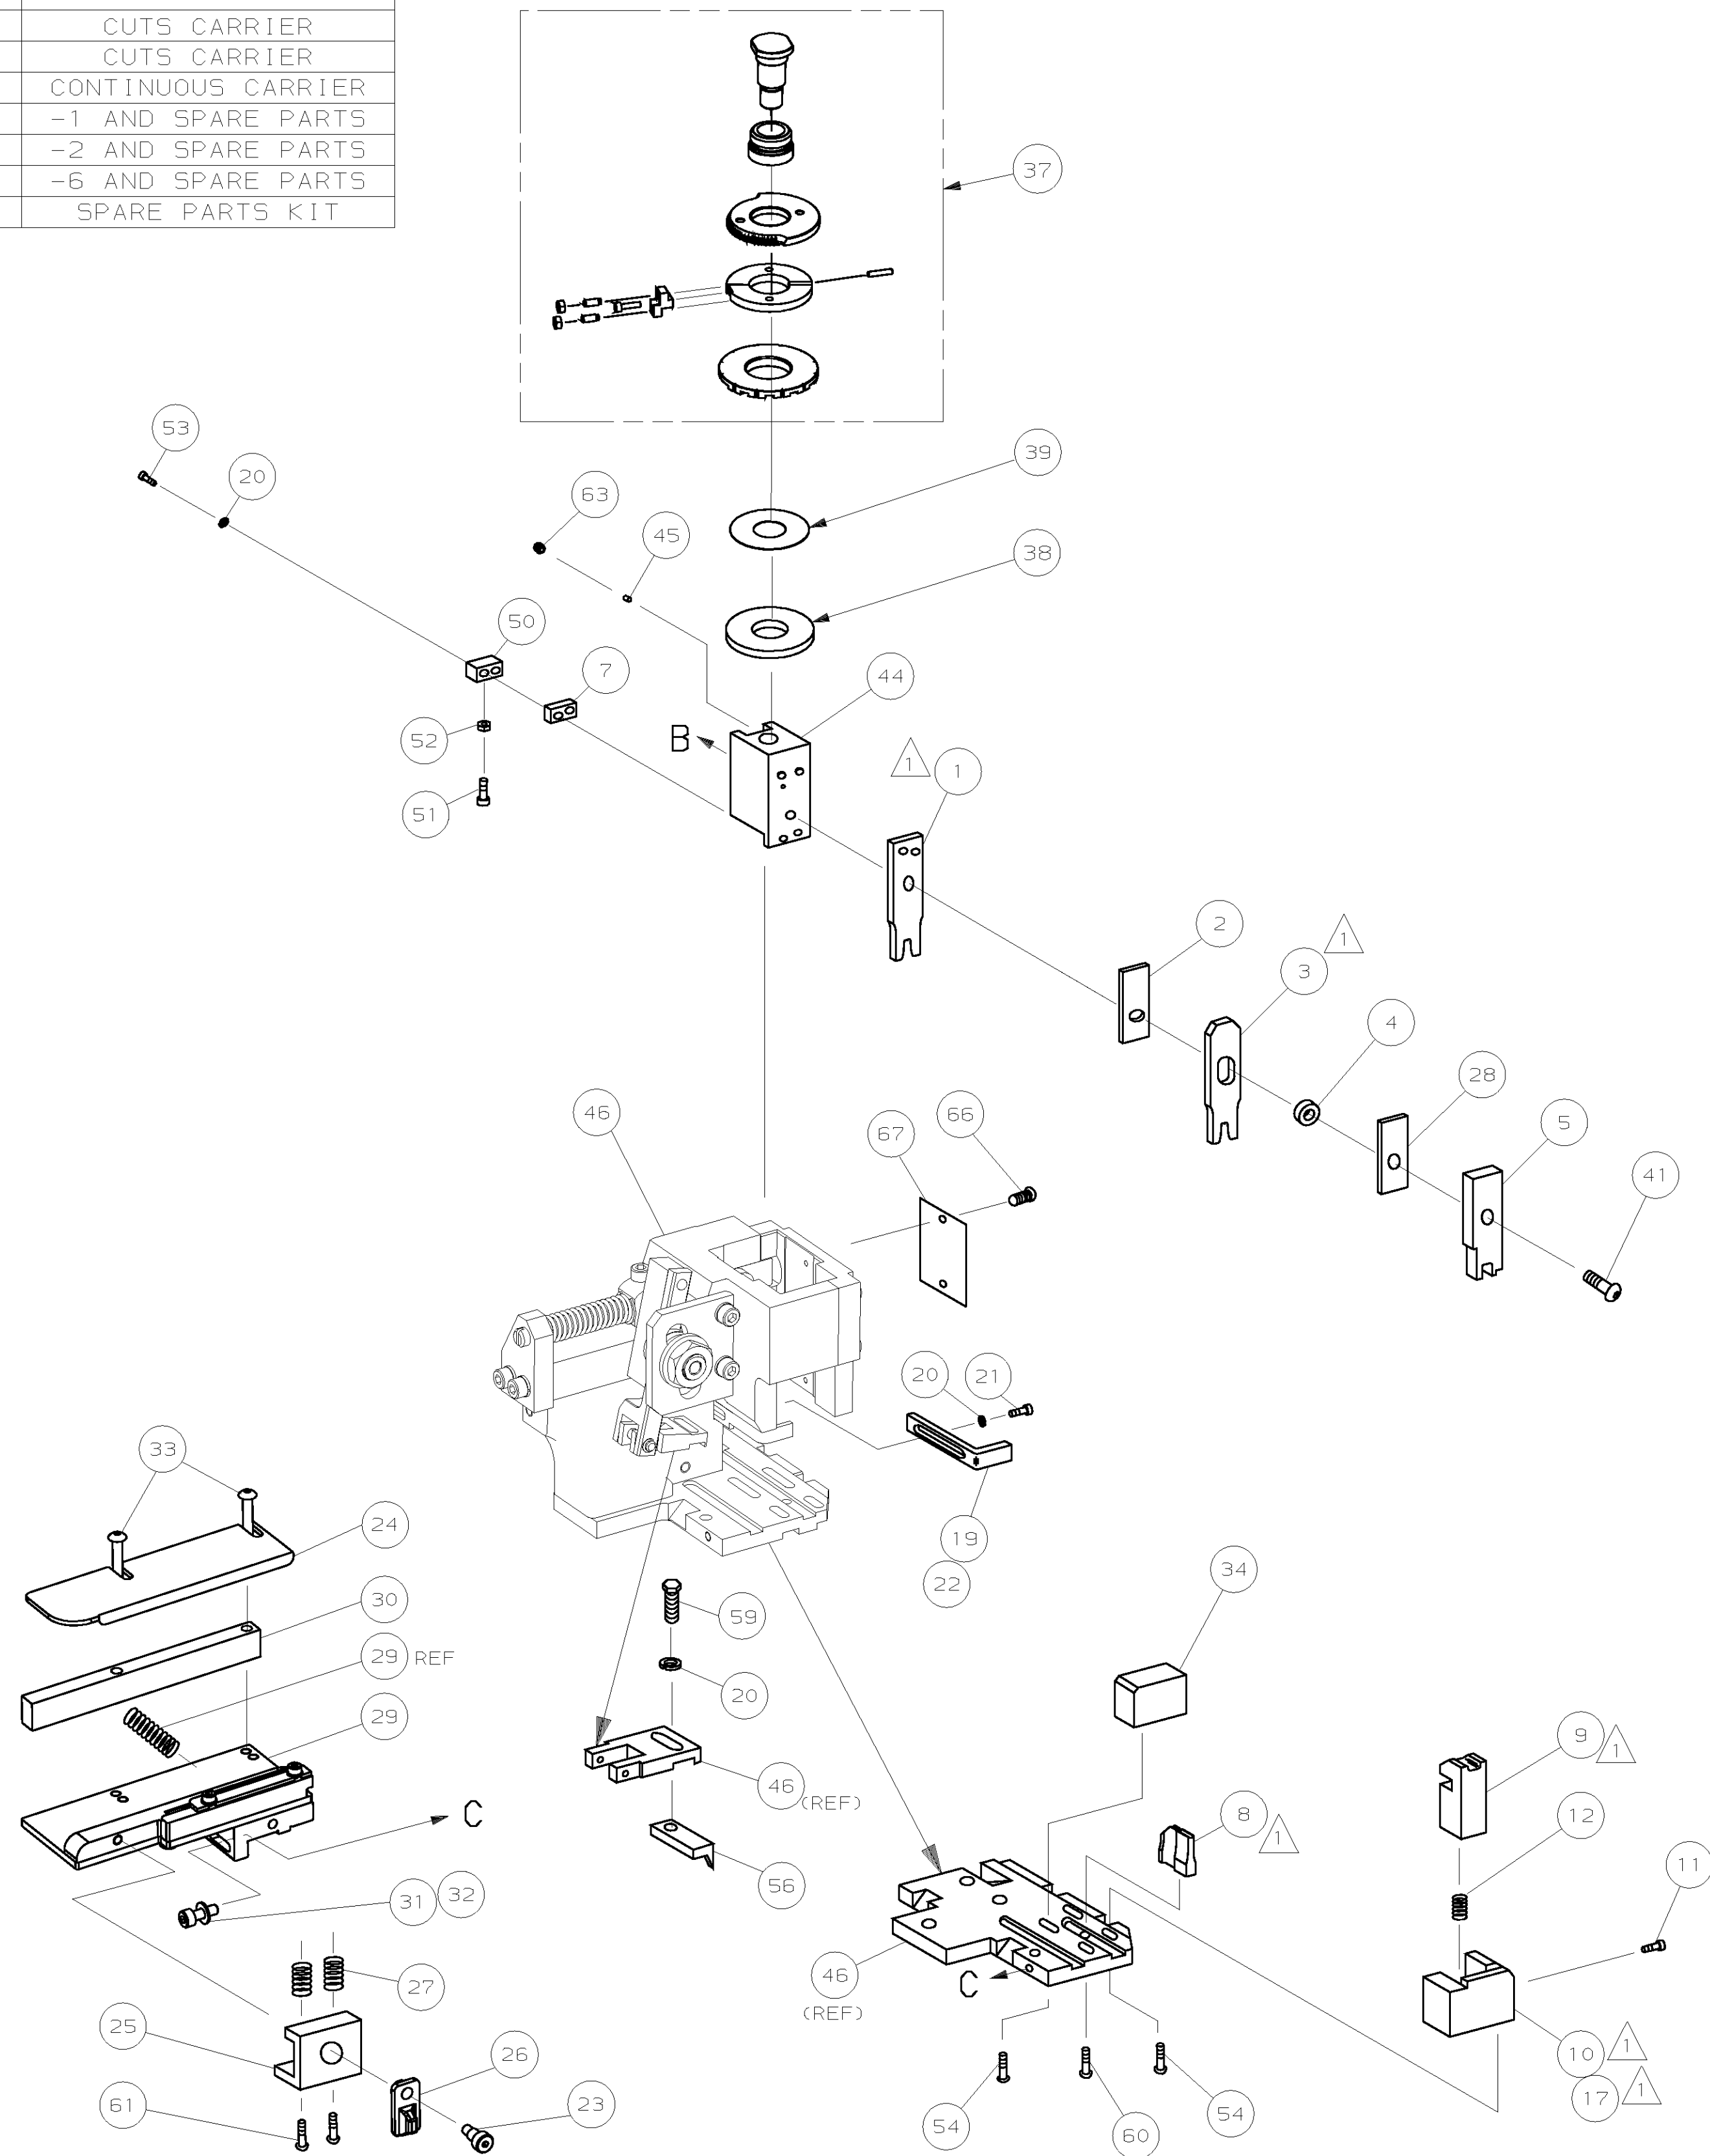

ON INSTALLATION, SET WIRE
DISC TO LARGEST WIRE SIZE
SETTING. USE OF SETTINGS
BELOW MIN REQUIRED CRIMP
HEIGHT SETTING WILL CAUSE
DAMAGE TO CRIMP TOOLING.

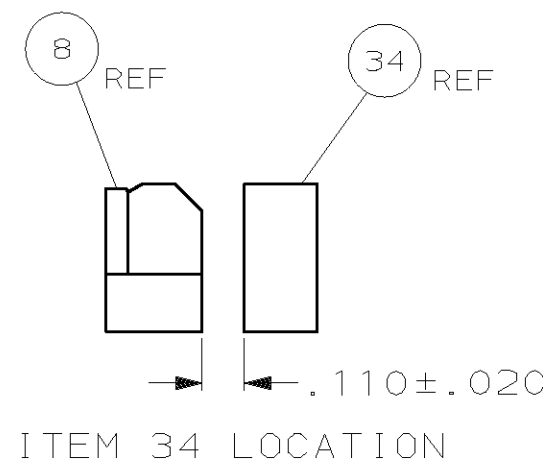

		A	RELEASED
P	F	LTR	REVISION RECORD

QTY REQD PER ASSY				PARTS LIST			
		DIMENSIONS: mm (INCHES)	MATL		HT TR		FIN
		DO NOT SCALE PRINT.					
		TOLERANCES UNLESS OTHERWISE SPECIFIED:	DR	12JUN03	APP	12JUN03	
		1 PLC DEC ±	R.O.WILSON			F.BACKHURST	
		2 PLC DEC ±	CHK			REL	
		3 PLC DEC ±					
		ANGLES ±	NAME				
		SURF TEXTURE: ✓	FINE ADJ SIDE FD HD-I APPL				MACHINE HD-I
TR	JUN03	REMOVE BURRS, BREAK SHARP EDGES RO.38 MAX	SCALE		DWG NO	1528182	SHEET 1 of 1
APP	DATE			D			REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1528182-6](#)