

Type 2 surge protection device - VAL-SQ SP 50-480D - 2800500

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection device for 480 V AC Delta configurations. Uses a compact, NEMA rated enclosure that connects easily to an existing enclosure. Hybrid Sine Wave Tracking provides 50 kA surge protection.

Product Description


Surge protection device for 480 V AC Delta configurations with 50 kA protection

Your advantages

- ✓ Floating contacts enable connection to a remote monitoring system
- ✓ Sine wave tracking enabling noise attenuation of up to -30 dB
- ✓ Each arrester path has separate fuse protection
- ✓ UL 1449, 3rd edition, September 2009
- ✓ LEDs consistently monitor the status of each individual phase

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 565080
GTIN	4046356565080

Technical data

Note

Trade restriction	The products are offered exclusively for export outside the EU and the European Economic Area.
-------------------	--

Dimensions

Width	250 mm
Depth	122 mm

Ambient conditions

Degree of protection	NEMA 4X
Ambient temperature (operation)	-40 °C ... 71 °C
Altitude	3658 m

Type 2 surge protection device - VAL-SQ SP 50-480D - 2800500

Technical data

General

IEC power supply system	TN-S
	TT
NEMA power supply system	480 V Delta
Mounting type	3/4 inch NPT male
Type	Parallel hybrid
Surge protection fault message	Phase LEDs
	Audible alarm
	Remote indication contact
Direction of action	3L-N & N-GND

Protective circuit

Maximum continuous operating voltage U_c	840 V
Response time t_A	< 1 ns

Connection, protective circuit

Connection method	#10 AWG/5.26 mm ² wires (24 in./61 cm long)
Connection technology	4-wire + Gnd
Conductor cross section AWG min.	10
Conductor cross section AWG max.	10

Remote indication contact

Connection method	#24 AWG/0.205 mm ² wires (24 in./61 cm long)
-------------------	---

NEMA / UL data

UL type	type 2
Maximum Continuous Operating Voltage (MCOV without reference direction)	840 V
Voltage protection rating VPR (L-L)	3000 V
Nominal discharge current I_n (without reference direction)	20 kA
Maximum Surge Current per Phase	50 kA
Short-circuit current rating (SCCR)	200 kA
EMI/RFI filtering	-30 dB @ 100 kHz


Standards and Regulations

Standards/regulations	UL 1449 3 rd edition, Sept. 2009
	UL 1283
	IEEE C62.41
	IEEE C62.45

Drawings

Type 2 surge protection device - VAL-SQ SP 50-480D - 2800500

Circuit diagram

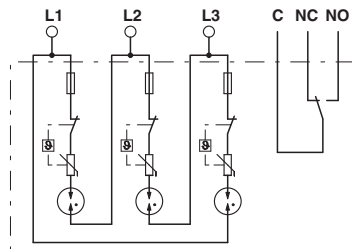

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2800500](#)