


XM2/XM3

D-sub Connectors

D-sub Connectors Ideal for Interfacing with OA Equipment

OA:Office Automation

- D-sub Connectors Ideal for Interfacing with OA Equipment.
- Shielded connectors that prevent EMI.
- Noise can be suppressed effectively by using the XM2S Plastic Hood with metallic finish.
- XM3B-F multi-hole ferrite-core models are also available. Use these models to suppress high-frequency noise and save PCB mounting space.
- Compact and tough structure with a metal shell provided.
- A wide variety of mounting brackets and grounding metals are available.

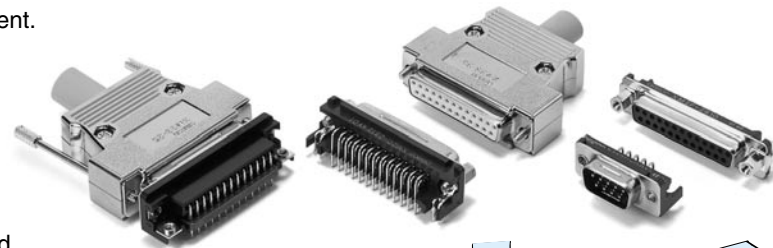


Connection Examples

●XM2F Sockets with Straight Terminal

Shape		
Number of contacts	9,15,25,37	9,15,25,37

●XM3B Sockets with Right Angle Terminal

Shape		
Number of contacts	9,15,25,37	9,15,25,37

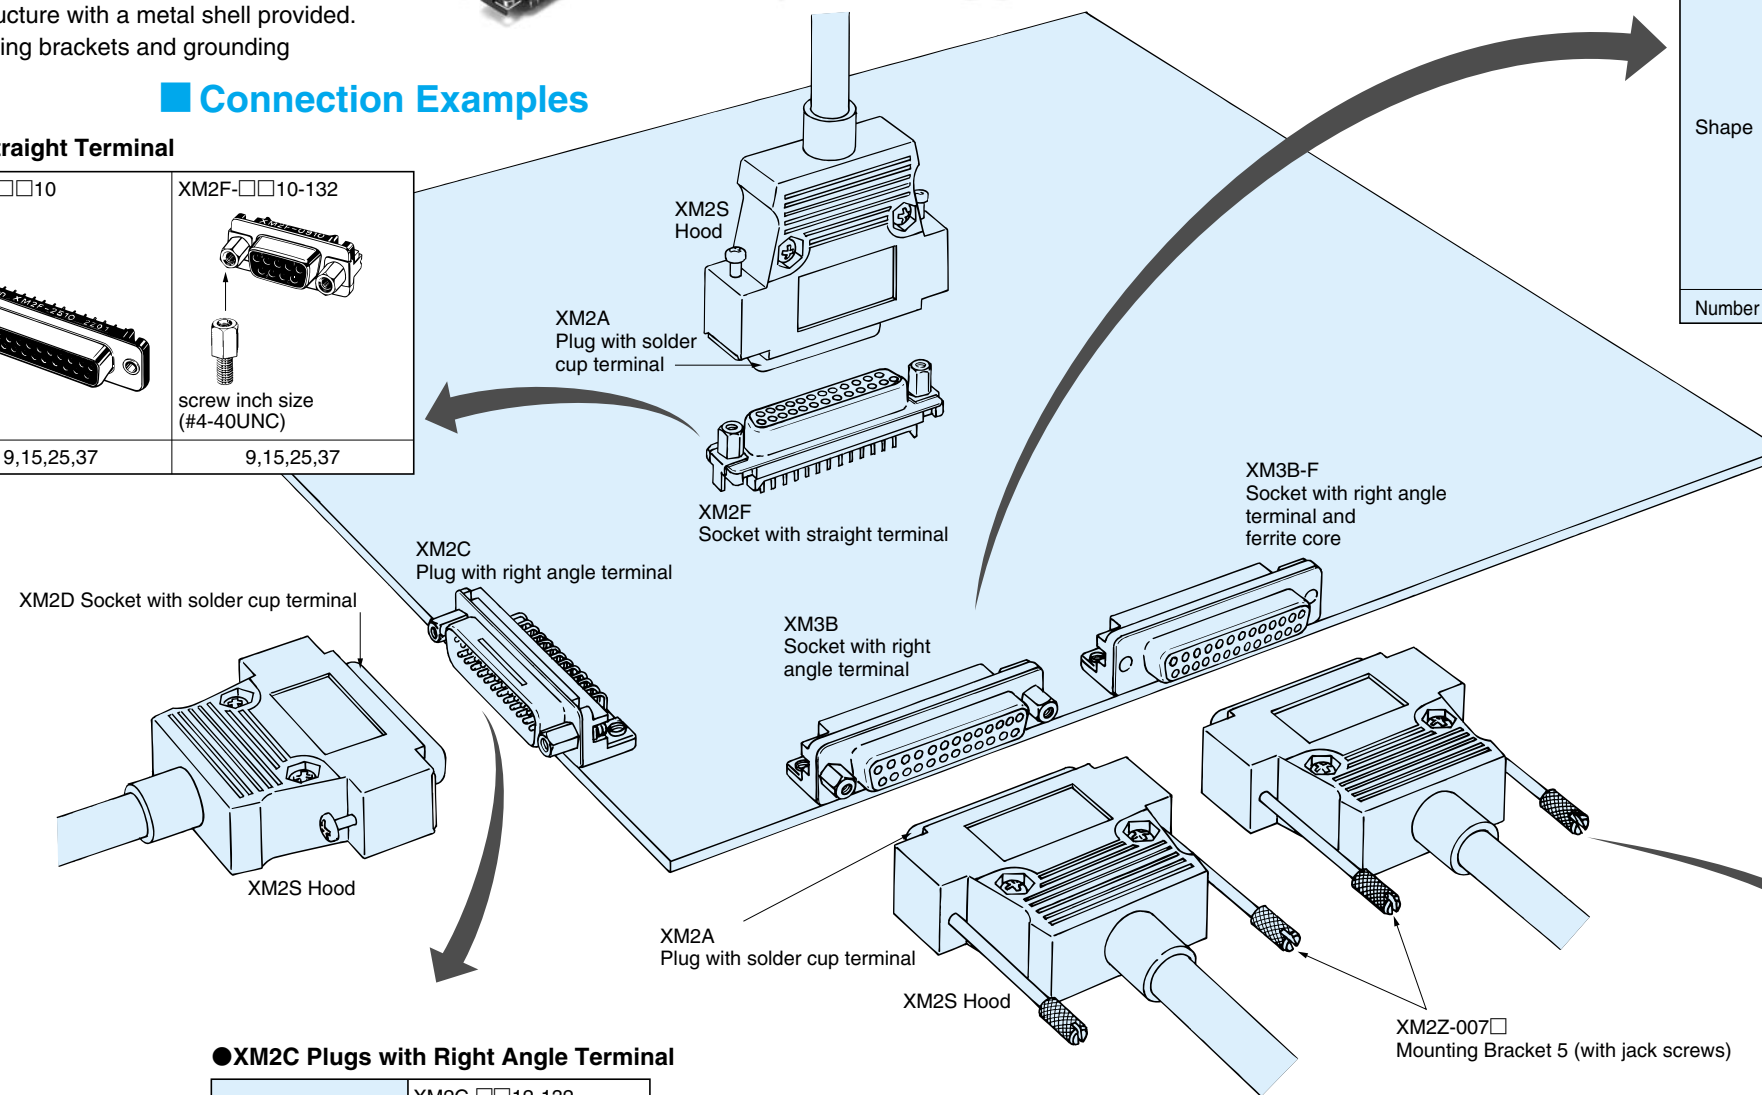

●XM2C Plugs with Right Angle Terminal

Shape	
Number of contacts	9,15,25,37

●Hood/Solder Cup Terminal

Shape			
Number of contacts	9,15,25,37	9,15,25,37	9,15,25,37

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[XM3B-1522-111](#) [XM3B-2522](#) [XM3B-3722-132](#) [XM3B-2522-111](#) [XM2S-2521](#) [XM2S-3712](#) [XM2S-2513](#) [XM2S-0921](#)
[XM2S-3711](#) [XM2S-2512](#) [XM2S-0912](#) [XM2S-3713](#) [XM2S-1512](#)