


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	15	Vp-p
OPERATING VOLTAGE RANGE	1 ~ 30	Vp-p
RATED CURRENT (MAX)	9	mA
CAPACITANCE	22,000±30%	pF
MINIMUM SPL @ 10 CM	100	dBA
RESONANT FREQUENCY	3,300	Hz
OPERATING TEMPERATURE	-20 ~ +60	°C
STORAGE TEMPERATURE	-30 ~ +70	°C
HOUSING MATERIAL	ABS	-
TERMINAL MATERIAL	LEAD WIRES	-
WEIGHT	10	grams

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	05/06/02	
A	REVISED TO NEW TEMPLATE	10/12/05	
B	REVISED MINIMUM SPL	12/9/05	B.R.

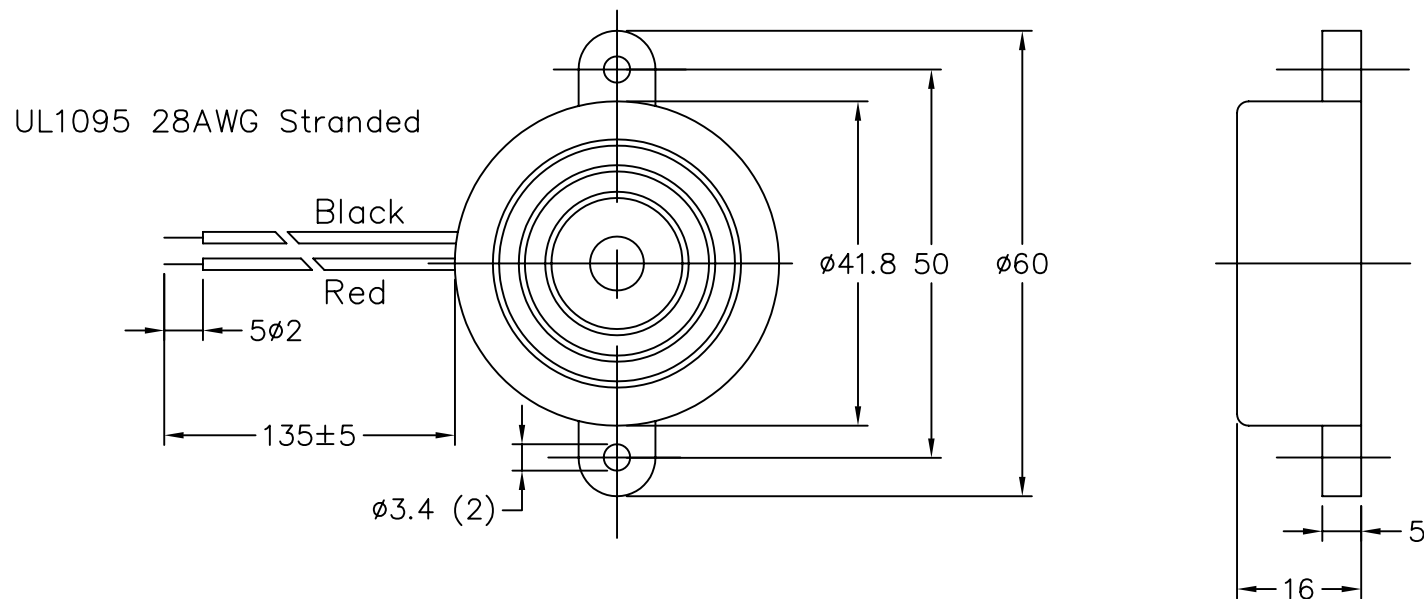

1. ALL DIMENSIONS ARE IN MILLIMETERS.

2. SPECIFICATION SUBJECT TO CHANGE
OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME
AT-14.DWG

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ± 0.5 AND
ANGLES ARE $\pm 3^\circ$.

APPROVALS		DATE
DRAWN	<i>RABL</i>	<i>05/02</i>
CHECKED	<i>X.X.</i>	<i>x/xx</i>
APPROVED	<i>S.J.</i>	<i>06/11/02</i>
DO NOT SCALE DRAWING		



Dayton , Ohio

TRANSDUCER (PIEZO)

SIZE
A

DRAWING NO.
AT-14

SCALE: N.T.S.

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[AT-14](#)