


	199	- COV	1.7		1.6%	
	2.4	31.7	25.65	20.70	12.70	6
With the locking structur	2.4	46.9	40.89	35.94	27.94	12
T	2.4	57.1	51.05	46.10	38.10	16
No locking structure	3.3	67.3	61.21	56.26	48.26	20


Part number 00 339 9021 0613 00 No. of positions 6,12,16,20 Variation(Terminating type) 13: Right Angle 14: Vertical Plating code

339 : Au plated

Ordering code

Vertical








Mating dimensions

Connection of a board and board

Connection of a board and crimped wire

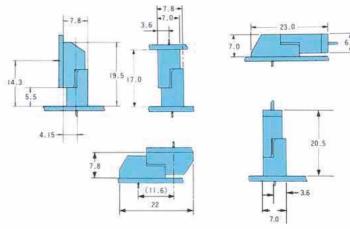

SERIES


Single row type with no flange for printed circuit boards

Mounting dimensions on the P.C.board

Vertical

#1.0±0.1	2-\$1.5±0.1
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	Ø → 0,635±0,1

Right Angle



Right Angle

No. of positions	Α	В	С	Remarks			
2	2.54	7.62	10.54				
3	5.08	11.58	13.08				
4	7.62	12.70	15.62	1			
6	12.70	17.78	20.70				
8	17.78	22.86	25.78				
10	22.86	27.94	30.86	With the locking structure			
12	27.94	33.02	35.94				
14	33.02	38.10	41.02				
16	38.10	43.18	46.10				
18	43.18	48.26	51.18				
20	48.26	53.34	56.26	No locking structure			

Ordering code

No. of positions
2,3,4,6,8,10,12,14,16,18,20

Variation(Terminating type)


11: Right Angle
12: Vertical (Note: 20Pos. is Right Angle type only.)

Plating code


339 : Au plated




Vertical

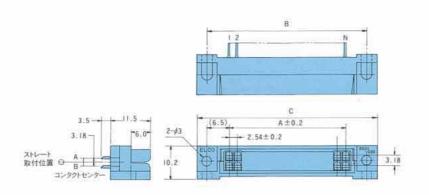

SERIES 9021 Dual type for printed circuit boards

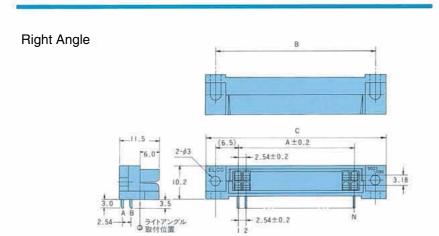

No. of positions	Α	В	С
14(7/7)	15.24	_	23.24
20 (10/10)	22.86	35.81	41.9
26(13/13)	30.48	43.43	49.5
30(15/15)	35.56	48.51	54.6
36(18/18)	43.18	56.13	62.2
40 (20/20)	48.26	61.21	67.3

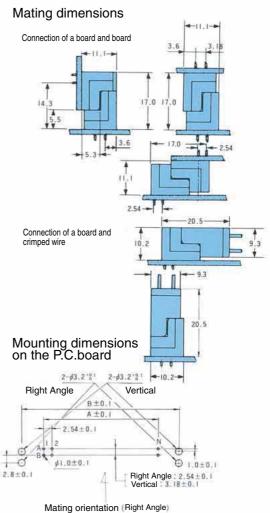

Ordering code


		9021	1421	00
of positio	ns			
	0,36,40			
ation(Tern	ninating type)			
21	Right Angle type with no flange (only for 14-contact)			
22	Vertical type with no flange (only for 14-contact)			
23	Right Angle type with the flange			
20				

Plating code

339 : Au plated



Crimp type

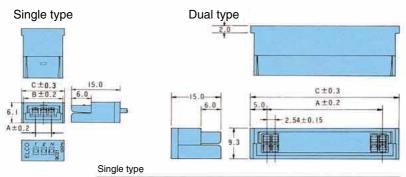

SERIES

Insulator


No. of positions	Α	С
14(7/ 7)	15.24	23.30*
20(10/10)	22.86	32.86
26(13/13)	30.48	40.48
30(15/15)	35.56	45.56
36(18/18)	43.18	53.18
40(20/20)	48.26	58.26


*with no flange

(Note) the location of flange for 14-position type is different from others.

No. of positions	A	В	С
2	2.54	10.54	12.5
3	5.08	13.08	15.1
4	7.62	15.62	17.6
6	12.70	20.70	22.7
8	17.78	25.78	27.8
10	22.86	30.86	32.9
12	27.94	35.94	37.9
14	33.02	41.02	43.0
16	38.10	46.10	48.1
18	43.18	51.18	53.2
20	48.26	56.26	58.2

Panel mounted type







Ordering code Crimp type

Part number	60	9021	3024	10 000
No. of positions Single type :2,3,4 Dual type :14,20	,6,8,10, ,26,30,	12,14,16,18, 36,40	,20	ΙT
Variation 1: Single type 2: Dual type				-
Color code —— ooo: Green				

No. of positions	Α	В	С
2	2.54	15.74	19.34
3	5.08	18.28	21.88
4	7.62	20.82	24.42
6	12.70	25.90	29.50
8	17.78	30.98	34.58
10	22.86	36.06	39.66
12	27.94	41.14	44.74

Shape of the panel to be mounted





Panel mounted type

Part number	60	9021	3028	16	000
No. of positions 2,3,4,6,8,10,12	-				T
Color code					
000:Green 001:Whi	te 002:	Black			

Contact

Part number	60	9021	0313	00	339
Variation					
0313 00: Contacts	s loose				
0323 99: Reeled 0	Contacts	s(10,000 co	ntacts per i	reel)	
Plating code =					
339: Au plated					



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

 $\frac{609021031300339}{609021303410000} \; \frac{609021302410000}{609021303410000} \; \frac{609021306410000}{609021303410000} \; \frac{609021308410000}{609021303410000}$