


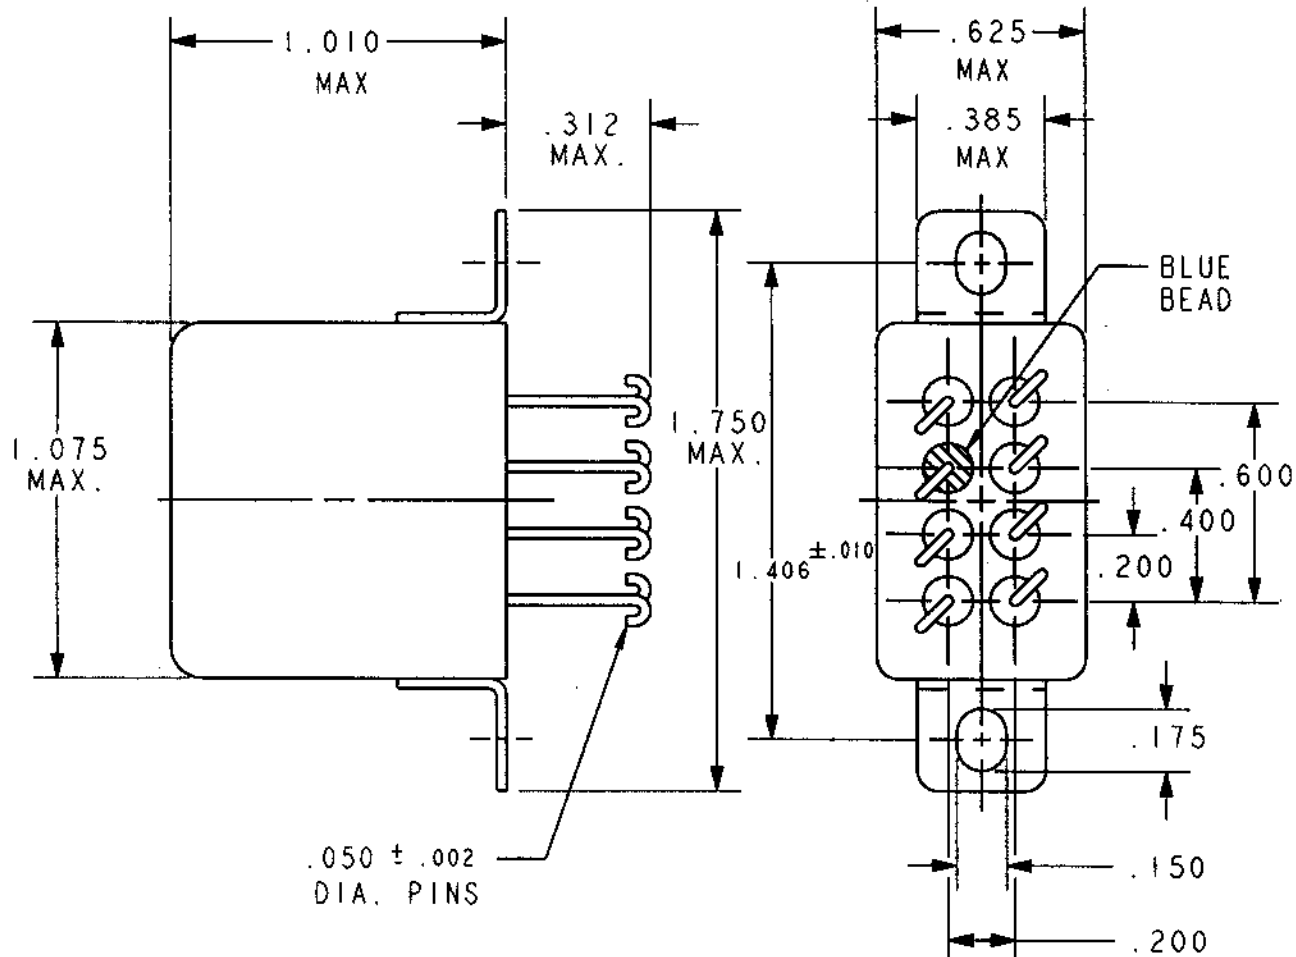

REV. 3
DCO 102710

COIL: @ 25°C

RESISTANCE 7600 OHMS ±10%

NOMINAL VOLTAGE 120.0 VDC

MUST OPERATE 65.0 VDC

MUST RELEASE 36.1 VDC MAX, 7.7 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.

OPERATE BOUNCE 5 MS MAX.


RELEASE BOUNCE 5 MS MAX.

CUST. OPL

CUST. NO. M5757/23-027 REV.

"07" RELAY

CUSTOMER DATA SHEET

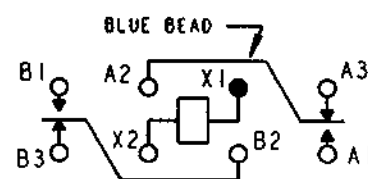

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
50,000 OPERATIONS

DR. BSH 8/17/01

CK. TLG 8-17-01

CII Technologies
advanced control electronic solutions

B07D992BE2-0132

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B07D992BE2-0132](#)