
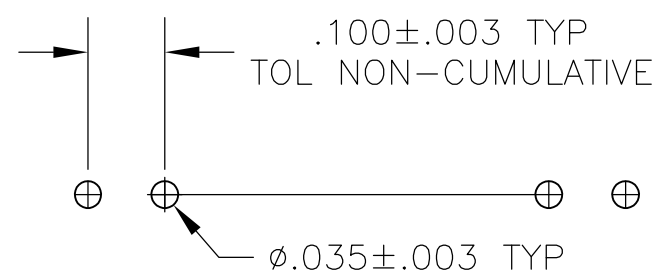


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			J	REVISED PER ECO-14-000068	26APR2014	NK	MM

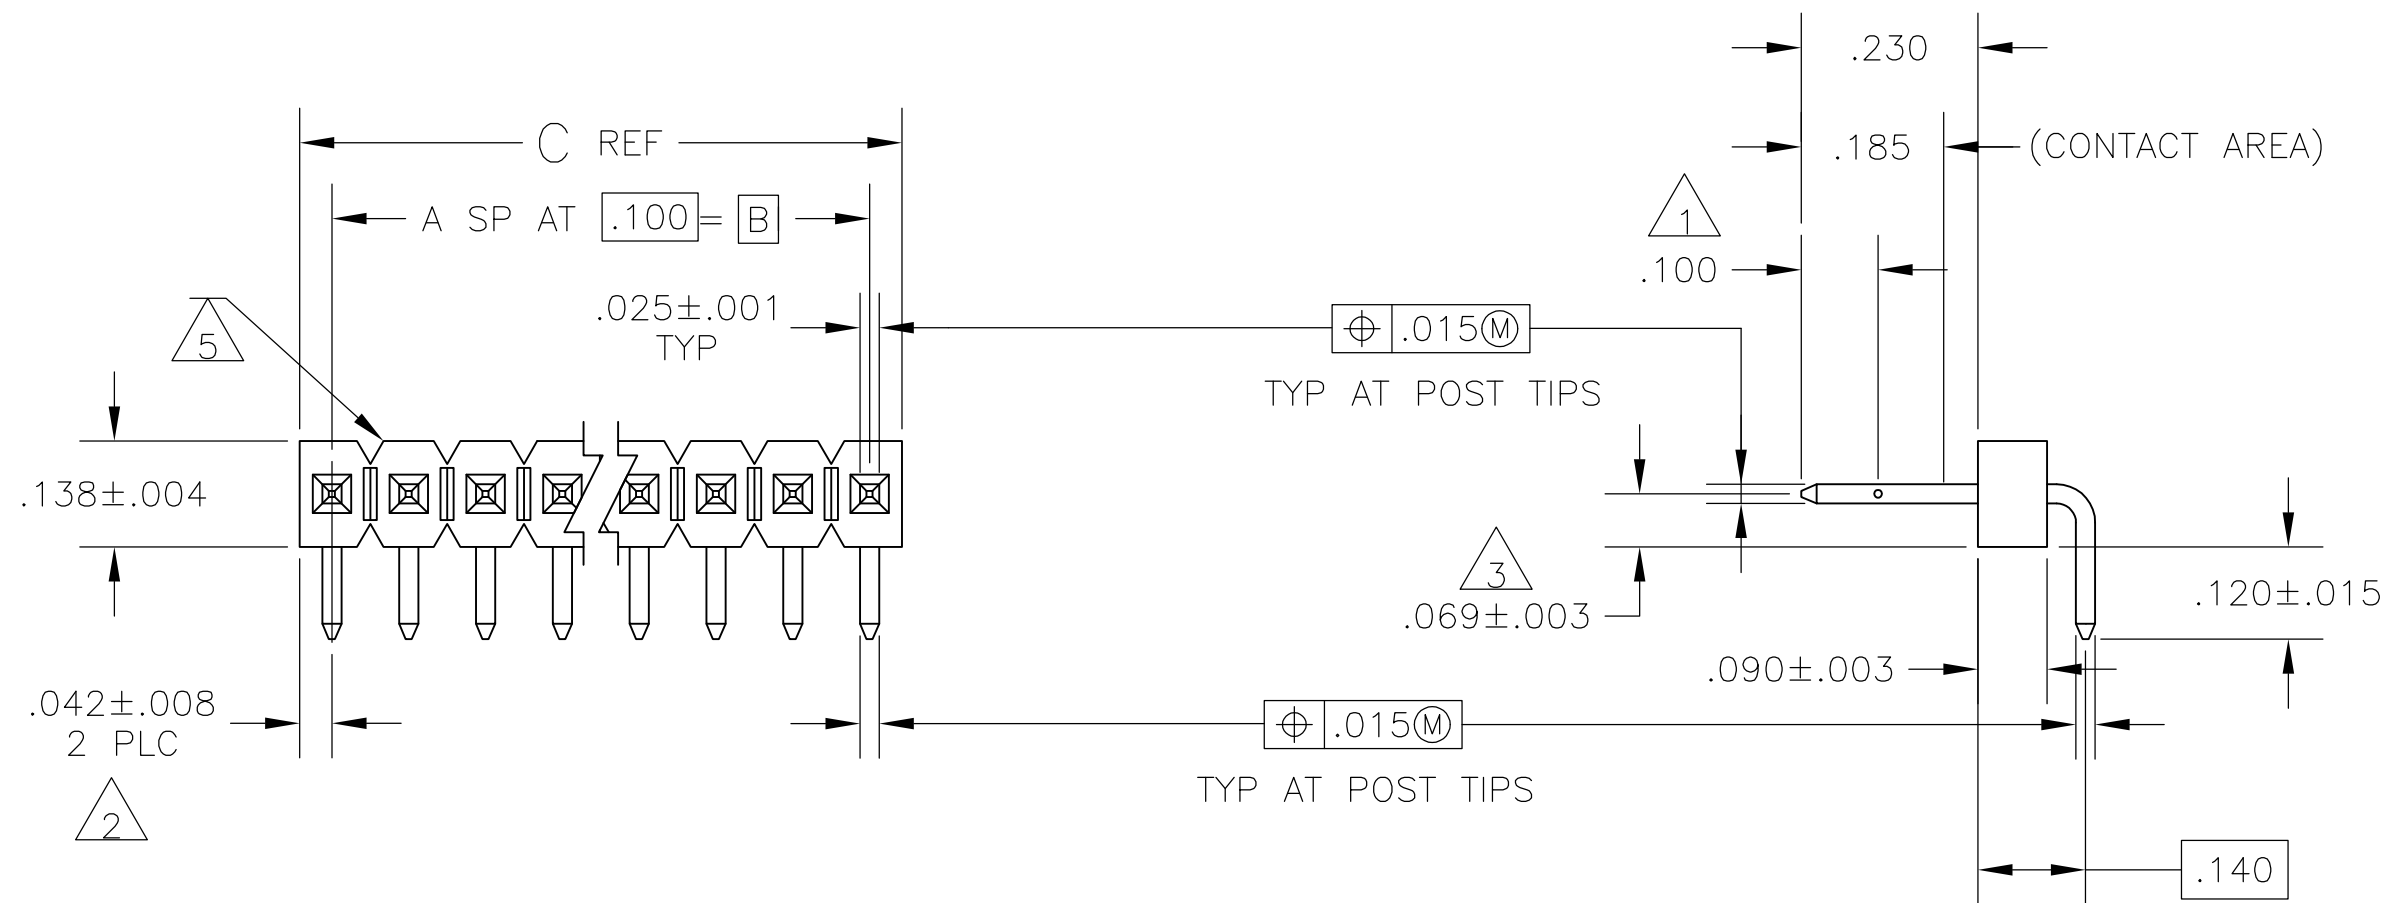

RECOMMENDED HOLE LAYOUT

- | | |
|---|---|
| 1 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS. |
| 2 | THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING |
| 3 | POINT OF MEASUREMENT FOR PLATING THICKNESS |
| 4 | SINGLE TUBING PACKAGING |
| 5 | BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT |
| 6 | FINISH: POSTS-- .000015 GOLD ON CONTACT AREA, .000100--.000200
MATTE TIN--LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL |
| 7 | FINISH: POSTS-- .000015 GOLD ON CONTACT AREA, .000100--.000200
MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL |
| 8 | HIGH TEMPERATURE CONFIGURATION |
| 9 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

OBSELETE	A	Z	4	.384	.300	3	4	9-103325-1	9	OBSELETE	A	4	.384	.300	3	4	4-103325-1
	A	Z		3.984	3.900	39	40	9-103325-0			A		3.984	3.900	39	40	4-103325-0
9	OBSELETE	A	Z	3.884	3.800	38	39	8-103325-9	9	OBSELETE	A		3.884	3.800	38	39	3-103325-9
9	OBSELETE	A	Z	3.784	3.700	37	38	8-103325-8	9	OBSELETE	A		3.784	3.700	37	38	3-103325-8
9	OBSELETE	A	Z	3.684	3.600	36	37	8-103325-7	9	OBSELETE	A		3.684	3.600	36	37	3-103325-7
9	OBSELETE	A	Z	3.584	3.500	35	36	8-103325-6	9	OBSELETE	A		3.584	3.500	35	36	3-103325-6
9	OBSELETE	A	Z	3.484	3.400	34	35	8-103325-5	9	OBSELETE	A		3.484	3.400	34	35	3-103325-5
9	OBSELETE	A	Z	3.384	3.300	33	34	8-103325-4	9	OBSELETE	A		3.384	3.300	33	34	3-103325-4
9	OBSELETE	A	Z	3.284	3.200	32	33	8-103325-3	9	OBSELETE	A		3.284	3.200	32	33	3-103325-3
9	OBSELETE	A	Z	3.184	3.100	31	32	8-103325-2	9	OBSELETE	A		3.184	3.100	31	32	3-103325-2
9	OBSELETE	A	Z	3.084	3.000	30	31	8-103325-1	9	OBSELETE	A		3.084	3.000	30	31	3-103325-1
9	OBSELETE	A	Z	2.984	2.900	29	30	8-103325-0	9	OBSELETE	A		2.984	2.900	29	30	3-103325-0
9	OBSELETE	A	Z	2.884	2.800	28	29	7-103325-9	9	OBSELETE	A		2.884	2.800	28	29	2-103325-9
9	OBSELETE	A	Z	2.784	2.700	27	28	7-103325-8	9	OBSELETE	A		2.784	2.700	27	28	2-103325-8
9	OBSELETE	A	Z	2.684	2.600	26	27	7-103325-7	9	OBSELETE	A		2.684	2.600	26	27	2-103325-7
9	OBSELETE	A	Z	2.584	2.500	25	26	7-103325-6	9	OBSELETE	A		2.584	2.500	25	26	2-103325-6
9	OBSELETE	A	Z	2.484	2.400	24	25	7-103325-5	9	OBSELETE	A		2.484	2.400	24	25	2-103325-5
9	OBSELETE	A	Z	2.384	2.300	23	24	7-103325-4	9	OBSELETE	A		2.384	2.300	23	24	2-103325-4
9	OBSELETE	A	Z	2.284	2.200	22	23	7-103325-3	9	OBSELETE	A		2.284	2.200	22	23	2-103325-3
9	OBSELETE	A	Z	2.184	2.100	21	22	7-103325-2	9	OBSELETE	A		2.184	2.100	21	22	2-103325-2
9	OBSELETE	A	Z	2.084	2.000	20	21	7-103325-1	9	OBSELETE	A		2.084	2.000	20	21	2-103325-1
9	OBSELETE	A	Z	1.984	1.900	19	20	7-103325-0			A		1.984	1.900	19	20	2-103325-0
9	OBSELETE	A	Z	1.884	1.800	18	19	6-103325-9	9	OBSELETE	A		1.884	1.800	18	19	1-103325-9
9	OBSELETE	A	Z	1.784	1.700	17	18	6-103325-8	9	OBSELETE	A		1.784	1.700	17	18	1-103325-8
9	OBSELETE	A	Z	1.684	1.600	16	17	6-103325-7			A		1.684	1.600	16	17	1-103325-7
		A	Z	1.584	1.500	15	16	6-103325-6	9	SUPERSEDED	A		1.584	1.500	15	16	1-103325-6
		A	Z	1.484	1.400	14	15	6-103325-5	9	SUPERSEDED	A		1.484	1.400	14	15	1-103325-5
9	OBSELETE	A	Z	1.384	1.300	13	14	6-103325-4	9	OBSELETE	A		1.384	1.300	13	14	1-103325-4
9	OBSELETE	A	Z	1.284	1.200	12	13	6-103325-3	9	OBSELETE	A		1.284	1.200	12	13	1-103325-3
9	OBSELETE	A	Z	1.184	1.100	11	12	6-103325-2	9	OBSELETE	A		1.184	1.100	11	12	1-103325-2
9	OBSELETE	A	Z	1.084	1.000	10	11	6-103325-1	9	OBSELETE	A		1.084	1.000	10	11	1-103325-1
9	OBSELETE	A	Z	.984	.900	9	10	6-103325-0	9	OBSELETE	A		.984	.900	9	10	1-103325-0
9	OBSELETE	A	Z	.884	.800	8	9	5-103325-9	9	OBSELETE	A		.884	.800	8	9	103325-9
9	OBSELETE	A	Z	.784	.700	7	8	5-103325-8	9	OBSELETE	A		.784	.700	7	8	103325-8
9	OBSELETE	A	Z	.684	.600	6	7	5-103325-7			A		.684	.600	6	7	103325-7
		A	Z	.584	.500	5	6	5-103325-6			A		.584	.500	5	6	103325-6
		A	Z	.484	.400	4	5	5-103325-5	9	SUPERSEDED	A		.484	.400	4	5	103325-5
		A	Z	.384	.300	3	4	5-103325-4			A		.384	.300	3	4	103325-4
9	OBSELETE	A	Z	.284	.200	2	3	5-103325-3	9	OBSELETE	A		.284	.200	2	3	103325-3
		A	Z	.184	.100	1	2	5-103325-2			A		.184	.100	1	2	103325-2
9	OBSELETE	A	Z	.084	—	—	1	5-103325-1	9	OBSELETE	A		.084	—	—	1	103325-1
	REMARKS	PLATING	EXCEPT	C	B	A	NO OF POSN	PART NUMBER		PLATING	EXCEPT	C	B	A	NO OF POSN	PART NUMBER	

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-103325-5](#)