

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC

	DIST
--	------

REVISIONS

[illegible]

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

APVD



C

REVISÉ ECR-12-021182

10DEC12

J. J.

S.Y


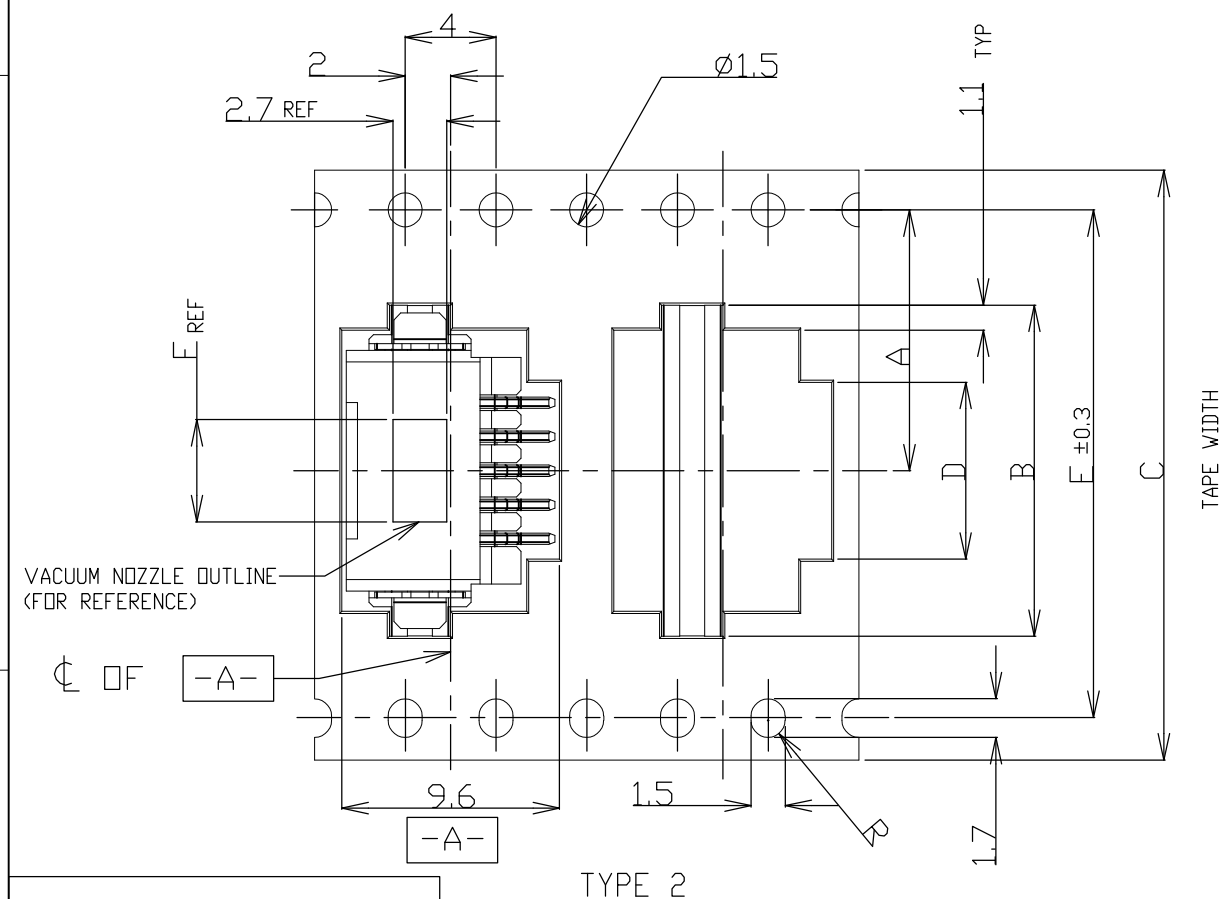
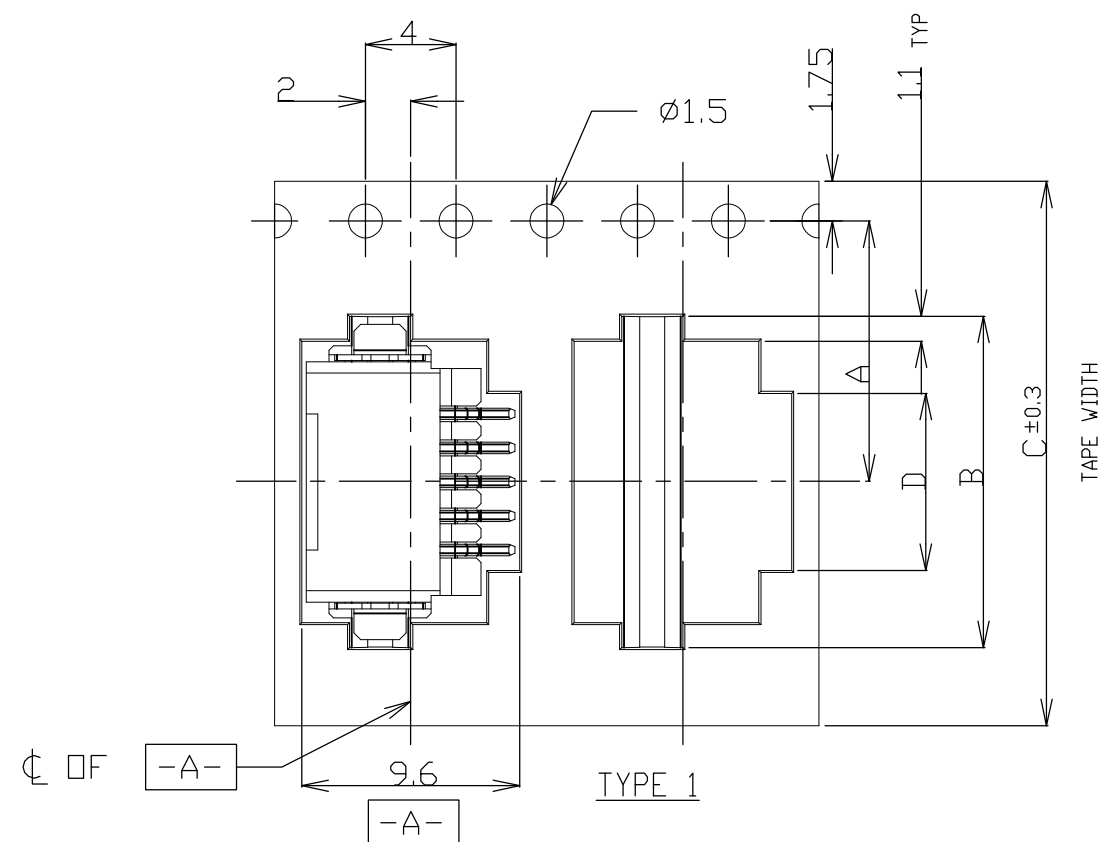


TOLERANCES UNLESS
OTHERWISE SPECIFIED:

```
10>_ : ±0,2
30>_* >10 : ±0,25
100>_* >30 : ±0,3
ANGLE : ±3°
```

NOTE:

1. PEELING STRENGTH: 0.20-0.69N(20-70gf)
PEELING ANGLE: 165-180°
PEELING SPEED: 300mm/MINUTE.

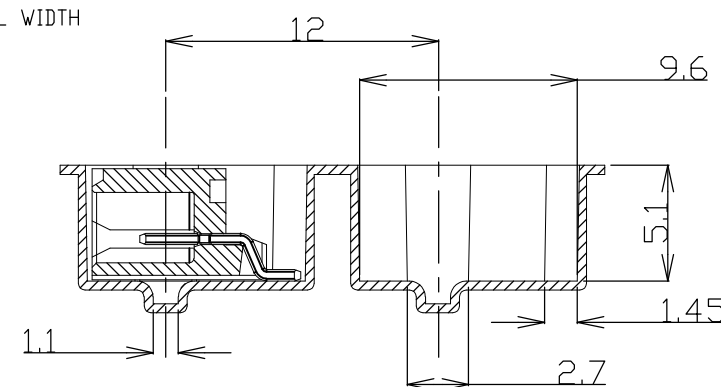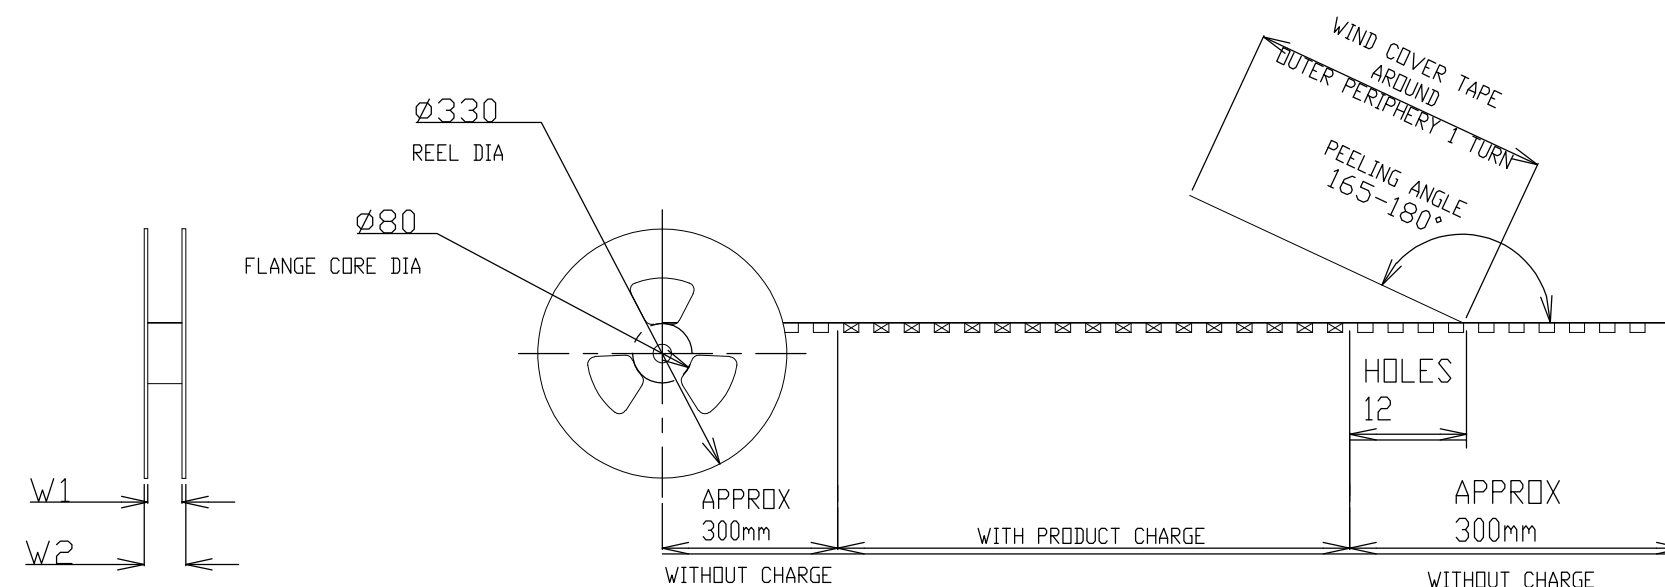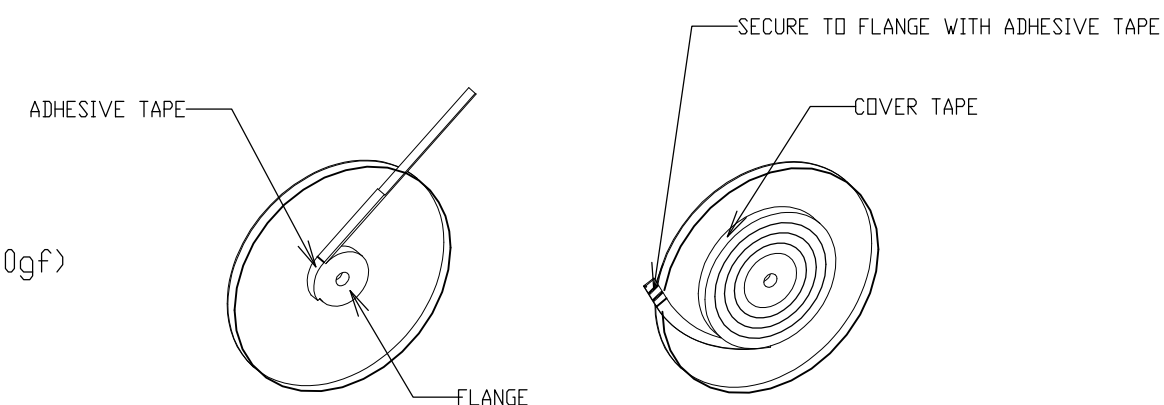

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	31JAN03
-----	---------

CHK	31JAN03
-----	---------

S. FAU
APVD 31 JAN 07

T.SASAKI
PRODUCT SPEC

APPLICATION SPEC

	1
WEIGHT	

CUSTOMER DRAWING



TE Connectivity

5	NAME	AMP Mini CT Connector 1.5mm PITCH SINGLE ROW POST HDR ASS'Y (H) SMT TYPE WITH BOSS, EMBOSS TAPE PACKAGED
---	------	--

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-292227	—

SCALE	NTS	SHEET	1 OF 4	REV	C1
-------	-----	-------	--------	-----	----

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC
ES

DIST
00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

TYPE 2	61.5	57.5	6.2	52.4	30.5	56	37.1	±0.15 26.2	700	20	BLACK	7-292227-0
	61.5	57.5	6.2	52.4	29.0	56	35.6		700	19		6-292227-9
	49.5	45.5	6.2	40.4	27.5	44	34.1	20.2 ±0.15	700	18		6-292227-8
	49.5	45.5	6.2	40.4	26.0	44	32.6		700	17		6-292227-7
	49.5	45.5	6.2	40.4	24.5	44	31.1		700	16		6-292227-6
	49.5	45.5	6.2	40.4	23.0	44	29.6		700	15		6-292227-5
	49.5	45.5	6.2	40.4	21.5	44	28.1		700	14		6-292227-4
	49.5	45.5	6.2	40.4	20.0	44	26.6		700	13		6-292227-3
	49.5	45.5	6.2	40.4	18.5	44	25.1		700	12		6-292227-2
	49.5	45.5	6.2	40.4	17.0	44	23.6		20.2	700		11
	37.5	33.5	6.2	28.4	15.5	32	22.1	14.2	700	10		6-292227-0
	37.5	33.5	6.2	28.4	14.0	32	20.6	14.2	700	9		5-292227-9
	37.5	33.5	6.2	28.4	12.5	32	19.1	14.2	700	8		5-292227-8
	37.5	33.5	6.2	28.4	11.0	32	17.6	14.2	700	7		5-292227-7
	29.5	25.5	6.2	-	9.5	24	16.1	11.5	700	6		5-292227-6
	29.5	25.5	6.2	-	8.0	24	14.6	11.5	700	5		5-292227-5
	29.5	25.5	6.2	-	6.5	24	13.1	11.5	700	4		5-292227-4
	29.5	25.5	4.7	-	5.0	24	11.6	11.5	700	3		5-292227-3
	29.5	25.5	2.8	-	3.5	24	10.1	11.5	700	2		5-292227-2
	TAPE TYPE	W2	W1	F	E	D	C	B	A	QTY/REEL		POS
DIMENSIONS												

TYPE 2	61.5	57.5	6.2	52.4	30.5	56	37.1	±0.15 26.2	700	20	BEIGE	2-292227-0
	61.5	57.5	6.2	52.4	29.0	56	35.6		700	19		1-292227-9
	49.5	45.5	6.2	40.4	27.5	44	34.1	20.2 ±0.15	700	18		1-292227-8
	49.5	45.5	6.2	40.4	26.0	44	32.6		700	17		1-292227-7
	49.5	45.5	6.2	40.4	24.5	44	31.1		700	16		1-292227-6
	49.5	45.5	6.2	40.4	23.0	44	29.6		700	15		1-292227-5
	49.5	45.5	6.2	40.4	21.5	44	28.1		700	14		1-292227-4
	49.5	45.5	6.2	40.4	20.0	44	26.6		700	13		1-292227-3
	49.5	45.5	6.2	40.4	18.5	44	25.1		700	12		1-292227-2
	49.5	45.5	6.2	40.4	17.0	44	23.6		20.2	700		11
	37.5	33.5	6.2	28.4	15.5	32	22.1	14.2	700	10		1-292227-0
	37.5	33.5	6.2	28.4	14.0	32	20.6	14.2	700	9		292227-9
	37.5	33.5	6.2	28.4	12.5	32	19.1	14.2	700	8		292227-8
	37.5	33.5	6.2	28.4	11.0	32	17.6	14.2	700	7		292227-7
	29.5	25.5	6.2	-	9.5	24	16.1	11.5	700	6		292227-6
	29.5	25.5	6.2	-	8.0	24	14.6	11.5	700	5		292227-5
	29.5	25.5	6.2	-	6.5	24	13.1	11.5	700	4		292227-4
	29.5	25.5	4.7	-	5.0	24	11.6	11.5	700	3		292227-3
	29.5	25.5	2.8	-	3.5	24	10.1	11.5	700	2		292227-2
	TAPE TYPE	W2	W1	F	E	D	C	B	A	QTY/REEL		POS
DIMENSIONS												

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH -

MATERIAL

-

DWN
S.XU
31JAN03

CHK
S.YAO
31JAN03

APVD
T.SASAKI
31JAN03

PRODUCT SPEC
108-60018

APPLICATION SPEC
114-5223

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITH BOSS, EMBOSS TAPE PACKAGED

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-292227


RESTRICTED TO
-

SCALE
NTS

SHEET
2 OF 4

REV
C1

1470-19 (3/11)

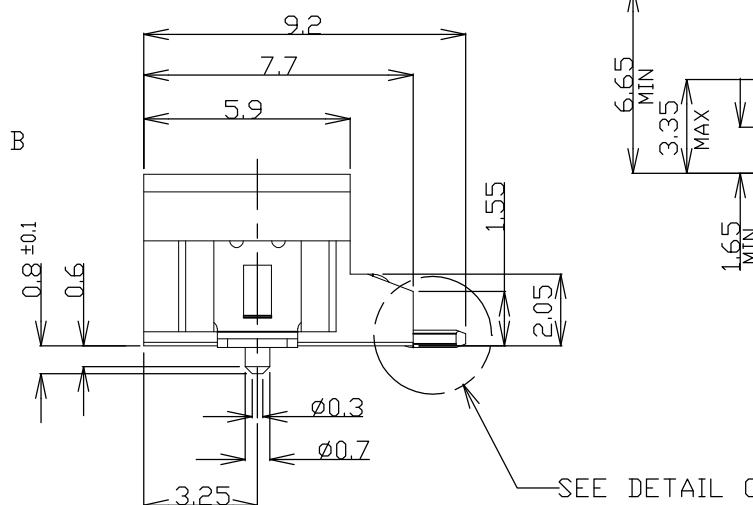


1470-19 (3/11)

LOC	DIST	REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	APVD
			-	SEE SHEET 1	-	-

1.079	36.5	31.5	34.5	30.6	28.5	20	7-292227-0	2-292227-0
1.034	35.0	30.0	33.0	29.1	27.0	19	6-292227-9	1-292227-9
0.989	33.5	28.5	31.5	27.6	25.5	18	6-292227-8	1-292227-8
0.943	32.0	27.0	30.0	26.1	24.0	17	6-292227-7	1-292227-7
0.897	30.5	25.5	28.5	24.6	22.5	16	6-292227-6	1-292227-6
0.851	29.0	24.0	27.0	23.1	21.0	15	6-292227-5	1-292227-5
0.805	27.5	22.5	25.5	21.6	19.5	14	6-292227-4	1-292227-4
0.760	26.0	21.0	24.0	20.1	18.0	13	6-292227-3	1-292227-3
0.714	24.5	19.5	22.5	18.6	16.5	12	6-292227-2	1-292227-2
0.668	23.0	18.0	21.0	17.1	15.0	11	6-292227-1	1-292227-1
0.622	21.5	16.5	19.5	15.6	13.5	10	6-292227-0	1-292227-0
0.577	20.0	15.0	18.0	14.1	12.0	9	5-292227-9	292227-9
0.531	18.5	13.5	16.5	12.6	10.5	8	5-292227-8	292227-8
0.485	17.0	12.0	15.0	11.1	9.0	7	5-292227-7	292227-7
0.439	15.5	10.5	13.5	9.6	7.5	6	5-292227-6	292209-6
0.393	14.0	9.0	12.0	8.1	6.0	5	5-292227-5	292227-5
0.348	12.5	7.5	10.5	6.6	4.5	4	5-292227-4	292227-4
0.302	11.0	6.0	9.0	5.1	3.0	3	5-292227-3	292227-3
0.256	9.5	4.5	7.5	3.6	1.5	2	5-292227-2	292227-2
WEIGHT (g)	E	D	C	B	A	Pos.	BLACK	BEIGE (NAT)
	DIMENSIONS						P/N	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH -

DWN S.XU 31JAN03

CHK S.YAO 31JAN03

APVD T.SASAKI 31JAN03

PRODUCT SPEC 108-60018

APPLICATION SPEC 114-5223

WEIGHT -

CUSTOMER DRAWING

 TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITH BOSS, EMBOSS TAPE PACKAGED

SIZE A3

CAGE CODE 00779

DRAWING NO C-292227

RESTRICTED TO -

SCALE NTS

SHEET 4 OF 4

REV C1

1470-19 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-292227-1](#)