



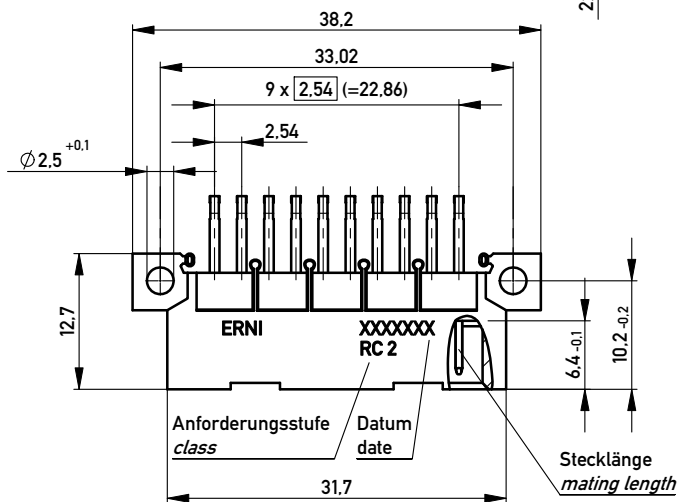


Diagram illustrating a 10x3 grid of squares, labeled 1 through 10 from right to left. The grid is divided into three sections: a 3x3 section on the left (columns 1-3), a 3x4 section in the middle (columns 4-7), and a 3x3 section on the right (columns 8-10). The squares are arranged in a 3x10 grid.

Technical drawing of a mechanical part with a grid of holes. The part has a total width of 53 ± 0.1 mm and a total height of $2 \times 2.54 (= 5.08)$ mm. The top edge is rounded. A grid of 10 rows and 10 columns of holes is shown. The holes are spaced 2.54 mm apart, with a total width of $9 \times 2.54 (= 22.86)$ mm for the grid. The distance from the left edge to the first column of holes is 2.8 ± 0.1 mm. The distance from the top edge to the first row of holes is 1 ± 0.1 mm. The distance from the right edge to the last column of holes is 2.54 mm. The distance from the bottom edge to the first row of holes is 2.54 mm. The distance from the left edge to the center of the grid is 33.02 mm. A note indicates that all holes have a diameter of 0.05 mm.

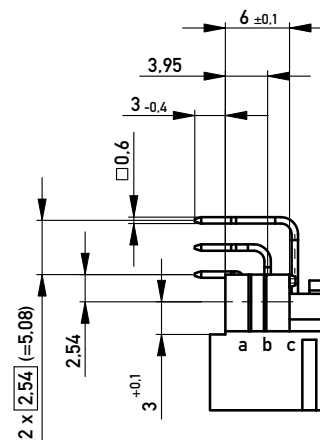

L = late mate, early break / nacheilend



Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

marking see drawing 294905

Copyright by ERNI GmbH Property notice pursuant to ISO 16016 to be observed.	Information:			Tolerances		 All Dimensions in mm	Scale	2:1		
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.			Designation			
							Messerleiste C/3 30 Löt <i>Male Connector C/3 30 solder</i>			
	B		13.08.2009		www.ERNI.com		254325			I
Index		Date				Class			STVC/3	A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[254325](#)