


Lockable DC Jack

161-0725-E



Lockable DC Jack

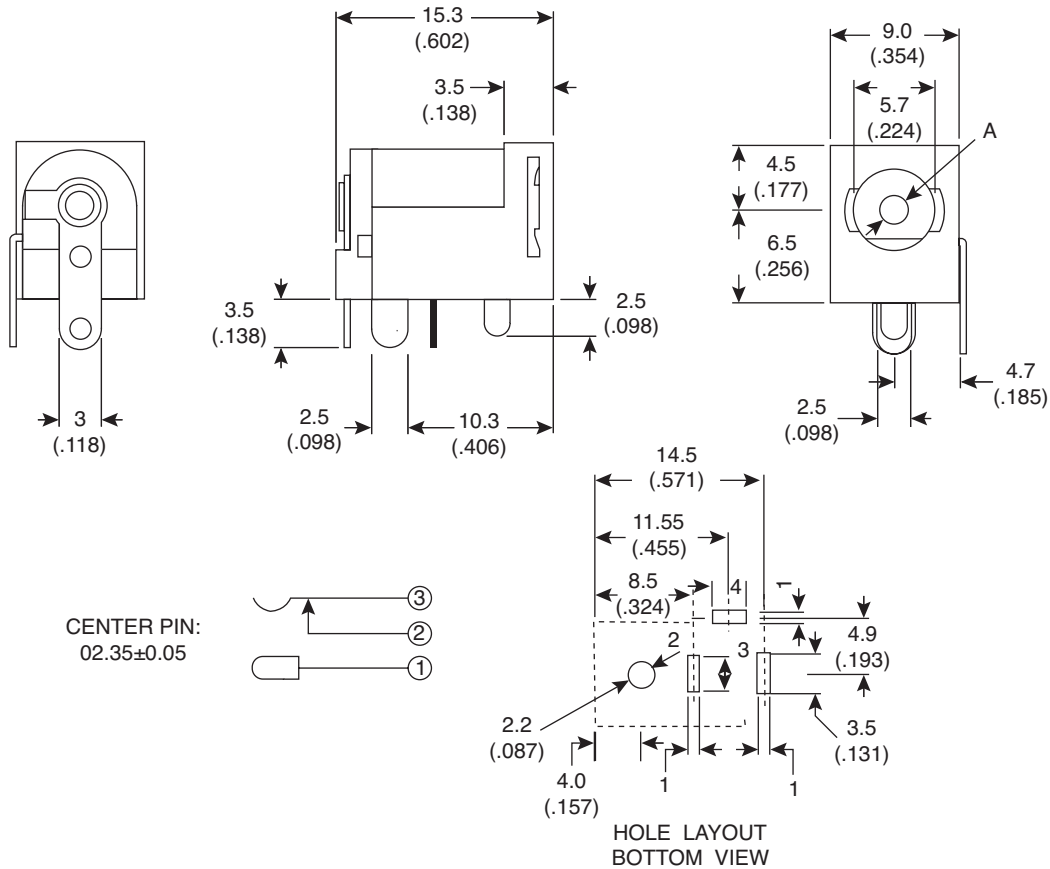

Dimensions: mm and (In.)

SPECIFICATIONS	
Rating:	DC 18V 1.5A
Contact resistance:	30mΩ max
Insulation resistance:	500VDC / 100Ω min
Withstand voltage:	500VAC 1 minute
Body:	Poly carbamate
Insulator:	Poly carbamate
Terminal A:	Tin plated brass
Terminal B:	Tin plated brass
Contact spring:	Tin plated copper
Pin:	Nickel plated brass
Tolerance:	0.3mm
RoHS Compliant	

Use with standard DC power plugs and the locking detent DC power plugs 171-0725-EX, 171-0726-EX

Date Last Revised: 8-23-06

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC- 300861

161-0725-E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[161-0725-E](#) [161-0725-EX](#)