

4



3

2


1

used for:

D-SUB

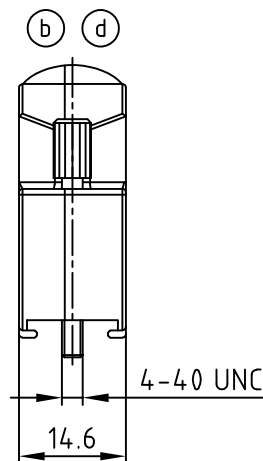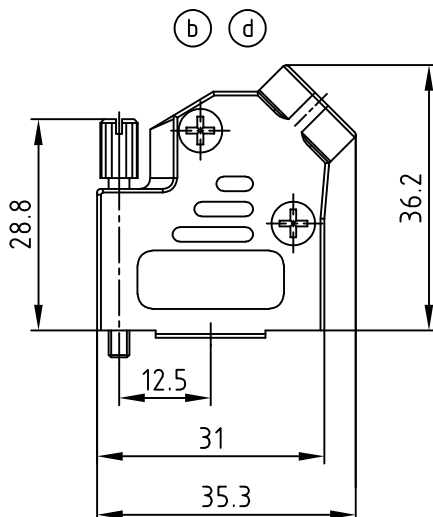

(b) (d) Strain relief

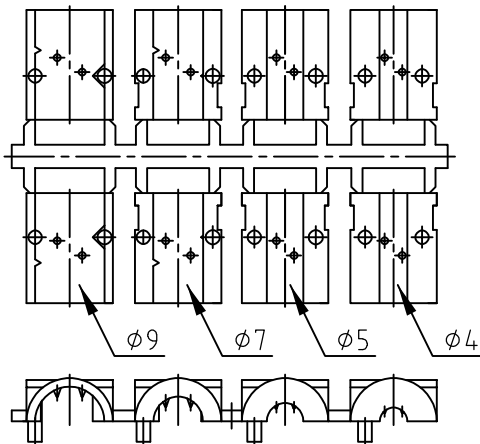

(c)

(d) TECHNICAL DATA:

1. BACKSHELL HALVES: ZINC DIE-CAST; NICKEL PLATED

2. ASSEMBLY SCREWS: STEEL; TIN PLATED

(e) 3. JACK SCREW: BRASS ALLOY; NICKEL PLATED

4. CABLE STRAIN RELIEF: PC

5. TEMPERATURE RANGE: -40°C to +120°C

6. ATTENUATION FACTOR: >40dB BETWEEN 30 MHz AND 2 GHz


7. ASSEMBLY INSTRUCTION SEE SHEET 2

RoHS compliant

(e)

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2000	date	name	
				drawn	02.10.	Parei	
2 x e	Ä 5748	03.08.2015	Unkrüer	appd.	02.10.	Resonnek	
5 x d	Ä 4171	02.01.2012	Lehmen.	norm			
2 x c	Ä 2754	23.07.2007	Lehmen.	d-old			
3 x b	Ä 2480	06.04.2006	Lehmen.				
a	Original						
rev.	description	date	name				



scale: 1:1
material: SEE NOTES

title:
METAL HOOD
9pos. EMI/RFI SHIELDING
with side cable entry and jack screw 4-40 UNC

dwg no: AutoCAD DIN-A
16K1A058A 4
sh:1/2

product no: (d) (c) 165X02689X

4

3


2

1


1

D-SUB


Strip cable 18mm and
shape cable to two pigtails

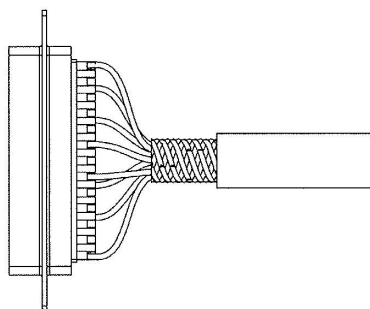

Bend cable shielding back on outside of strain relief

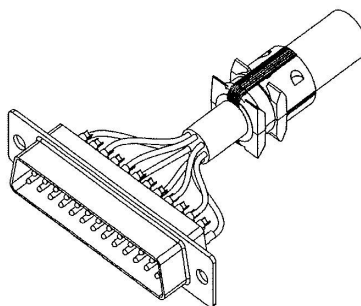

Assemble the other half
screwing force: 100-120 Ncm.

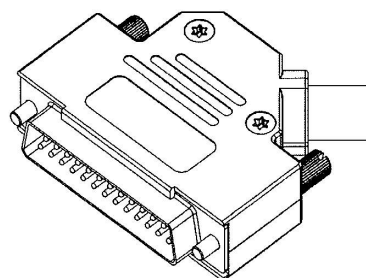

CONEC®

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[165X02689X](#)