
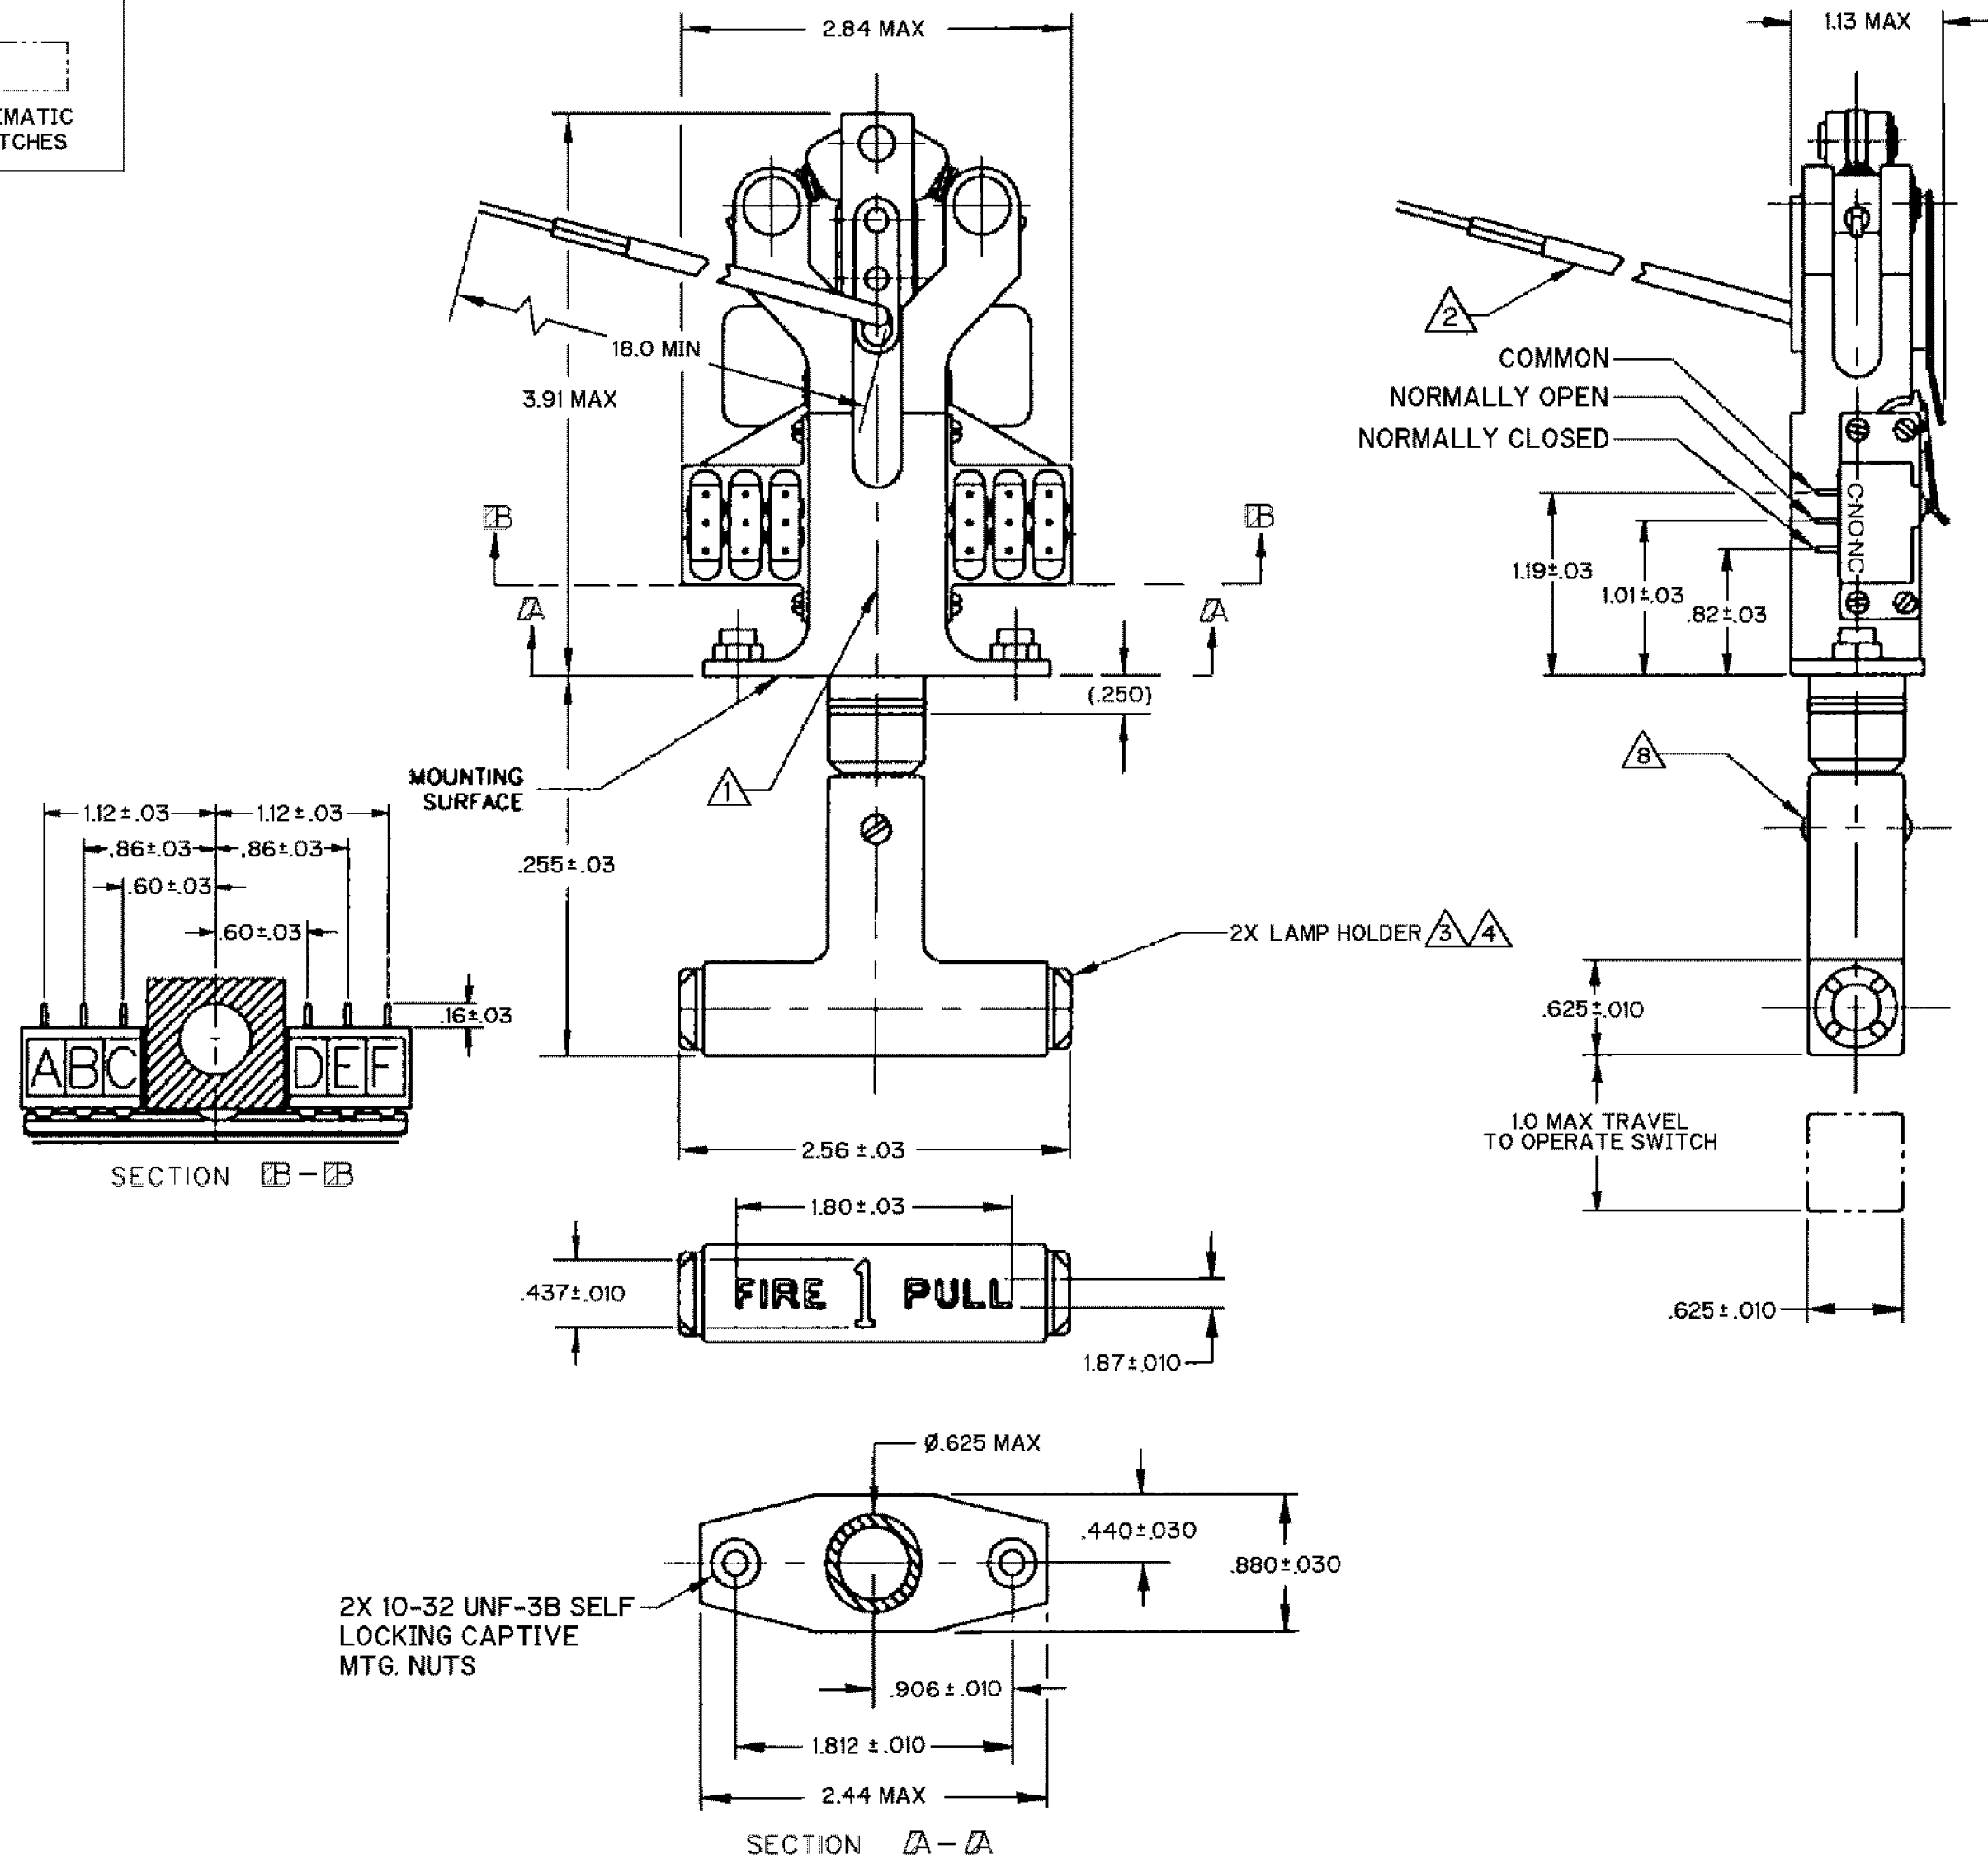
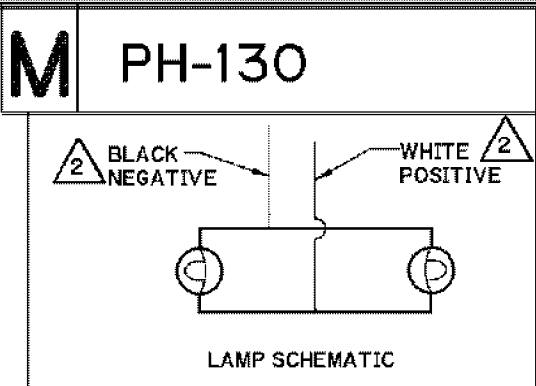


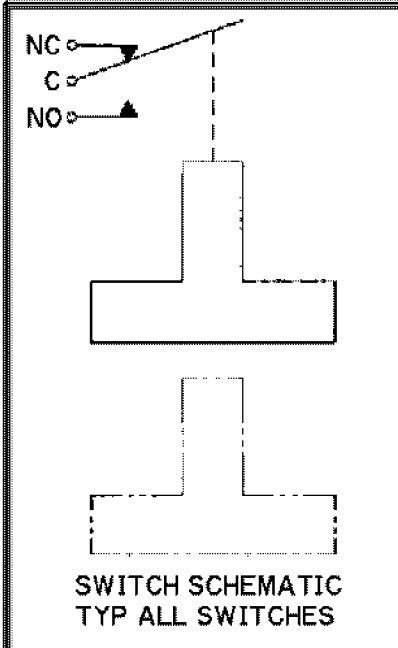

- NOTES
- MARK MANUFACTURER'S NAME, CATALOG LISTING, FED. MFG. CODE AND DATE CODE
  - 2X ELECTRICAL LEADS TO LAMPS: 20 GAGE PER MIL-W-81044/6
  - 2X FILTERS: RED MS250101-13A
  - 2X LAMPS: MS25237-327 (28 VOLTS)
  - MAXIMUM POWER CONSUMPTION PER LAMP TO BE 4.5 WATTS
  - TEE HANDLE: MATTE PLASTIC PER MIL-STD-395, PAINTED RED, COLOR NUMBER 31136 PER FED-STD-595
  - HANDLE MUST NOT APPEAR LIT UNDER AMBIENT LIGHT CONDITIONS AND MUST APPEAR LIT WHEN ENERGIZED UNDER AMBIENT LIGHT CONDITIONS
  - TORQUE FASTENER 4 TO 6 IN-LB MAXIMUM AFTER INSTALLATION
  - CONTACTS SEALED PER MIL-PRF-8805 SYMBOL 3 (WATERTIGHT)

| THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. |  |                     |                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------|---------------------|
| CHARACTERISTICS                                                                                                                                                                     |  | ELECTRICAL DATA     |                     |
| OPERATING FORCE — — — 7-10 LBS                                                                                                                                                      |  | CONTACT ARRANGEMENT |                     |
| OVERTRAVEL — — — .075 MIN                                                                                                                                                           |  | 6X S P D T          |                     |
| TOTAL TRAVEL — — — .9 TYP                                                                                                                                                           |  | 28 VDC              |                     |
| FUNCTIONAL LAMP LIFE — 25 OPERATIONS MIN                                                                                                                                            |  | LOAD (AMPS)         | SEA LEVEL 50,000 FT |
|                                                                                                                                                                                     |  | CONTACT             | SILVER SILVER       |
|                                                                                                                                                                                     |  | RESISTIVE           | 7 4                 |
|                                                                                                                                                                                     |  | INDUCTIVE           | 4 2.5               |
|                                                                                                                                                                                     |  | MOTOR               | — —                 |

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH  
a Honeywell Division

FED. MFG. CODE 01929

SWITCH - ENCLOSED

CATALOG LISTING  
PH-130

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACES (.00) ±.015

THREE PLACES (.000) ±.005

ANGLES ± 4°

WEIGHT .55 LB MAX

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[PH-130](#)