

Feature :

Water proof IP67 sealed
Mini in dimension
SMT, right angle and vertical PCB terminal


Application :

Consumer products
Computer products
Instrumentation
Communication equipments



SWITCH SPECIFICATIONS





POLE - POSITION	Momentary action , SPST
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	1000 MΩ MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	200 ± 80 gf ; 450 ± 150 gf
OPERATING LIFE	500,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	0.45 ± 0.15 mm
SEALING	IP67

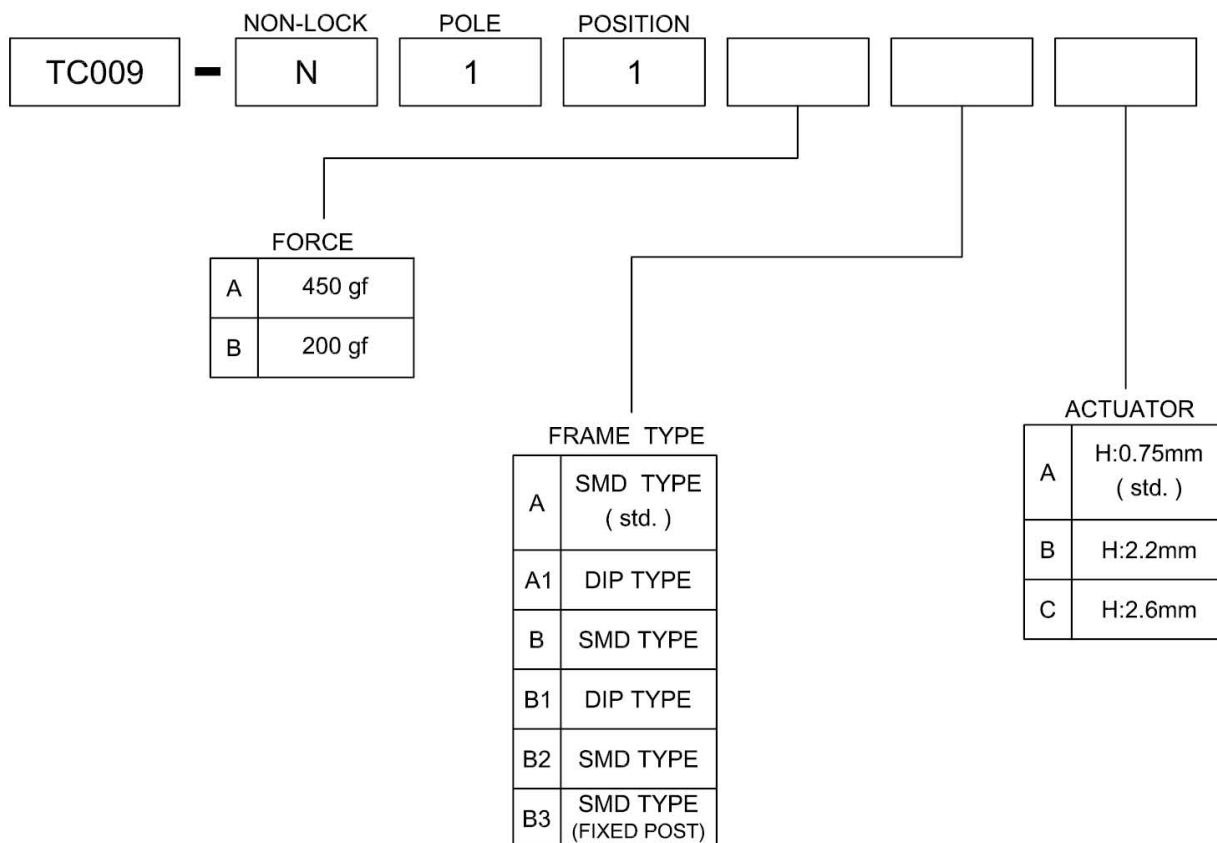 HOW TO ORDER







DIMENSION





• TC009-N11AAA







• TC009-N11AA1B







• TC009-N11AB3A







• TC009-N11AB1B




• TC009-N11BBC



• TC009-N11BB2C



CIRCUIT



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Well Buying:](#)

[TC009-N11ABB](#)