



LOC		DIST		REVISONS			
GP	00	F	LTR	DESCRIPTION	DATE	DWN	APVD
		E		REV: EC 001C-0007-01	22JAN01	JA	TW
		F		REVISED PER EC 0S15-0450-02	21JAN2003	DLD	RPM
		G		REVISED PER EC 0S15-0324-03	03DEC03	JB	CF

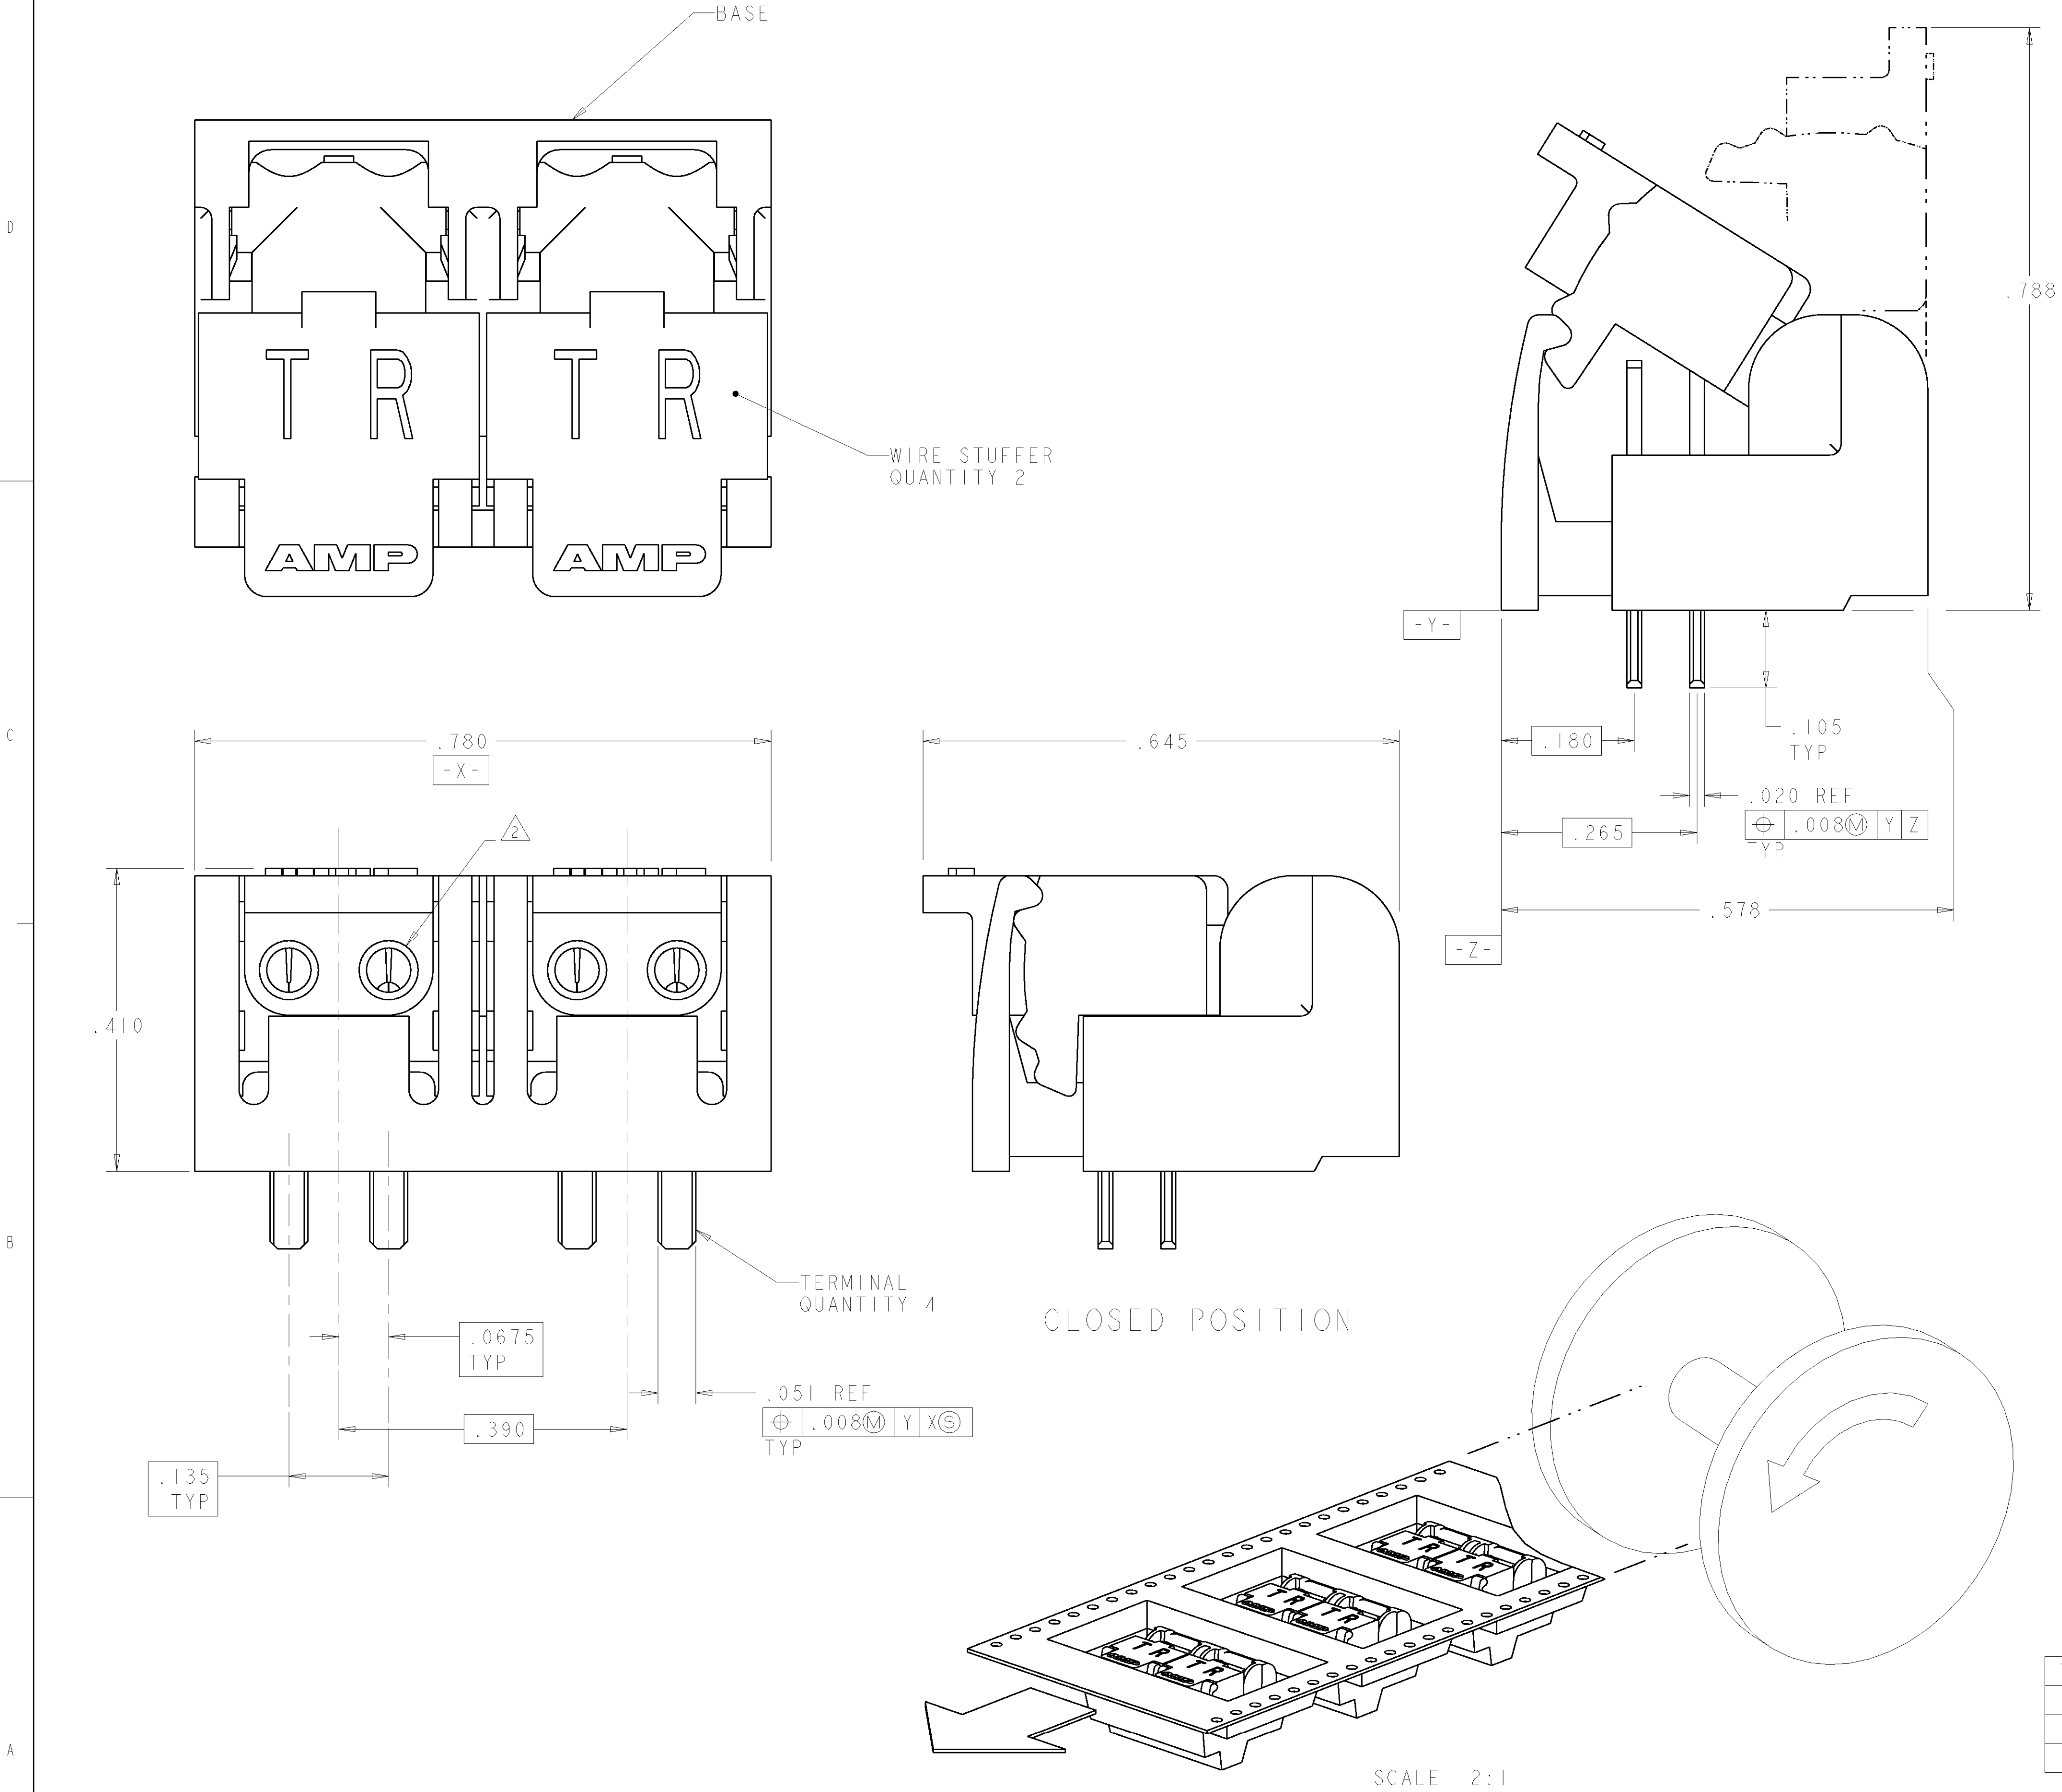

- 1 MATERIAL: BASE - HIGH TEMPERATURE MOLDING COMPOUND, BLACK.
WIRE STUFFER: - HIGH TEMPERATURE MOLDING COMPOUND.
TERMINAL - COPPER ALLOY, PLATED WITH 3.81µm MINIMUM THICK.
TIN OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
- 2 EACH WIRE ENTRY HOLE ACCEPTS ONE UNSTRIPPED SOLID COPPER
22-26 AWG WIRE WITH WIRE INSULATION DIAMETER RANGE FROM
.060 THROUGH .040. OTHER WIRE SIZES AND TYPES SHALL BE
SUBMITTED TO AMP ENGINEERS FOR APPLICATION APPROVAL.
3. SOLDER TABS PROVIDED FOR PERMANENT BOARD MOUNTING.
- 4 LOCATION OF HOLE PATTERN DETERMINED BASED ON CUSTOMER
REQUIREMENTS.

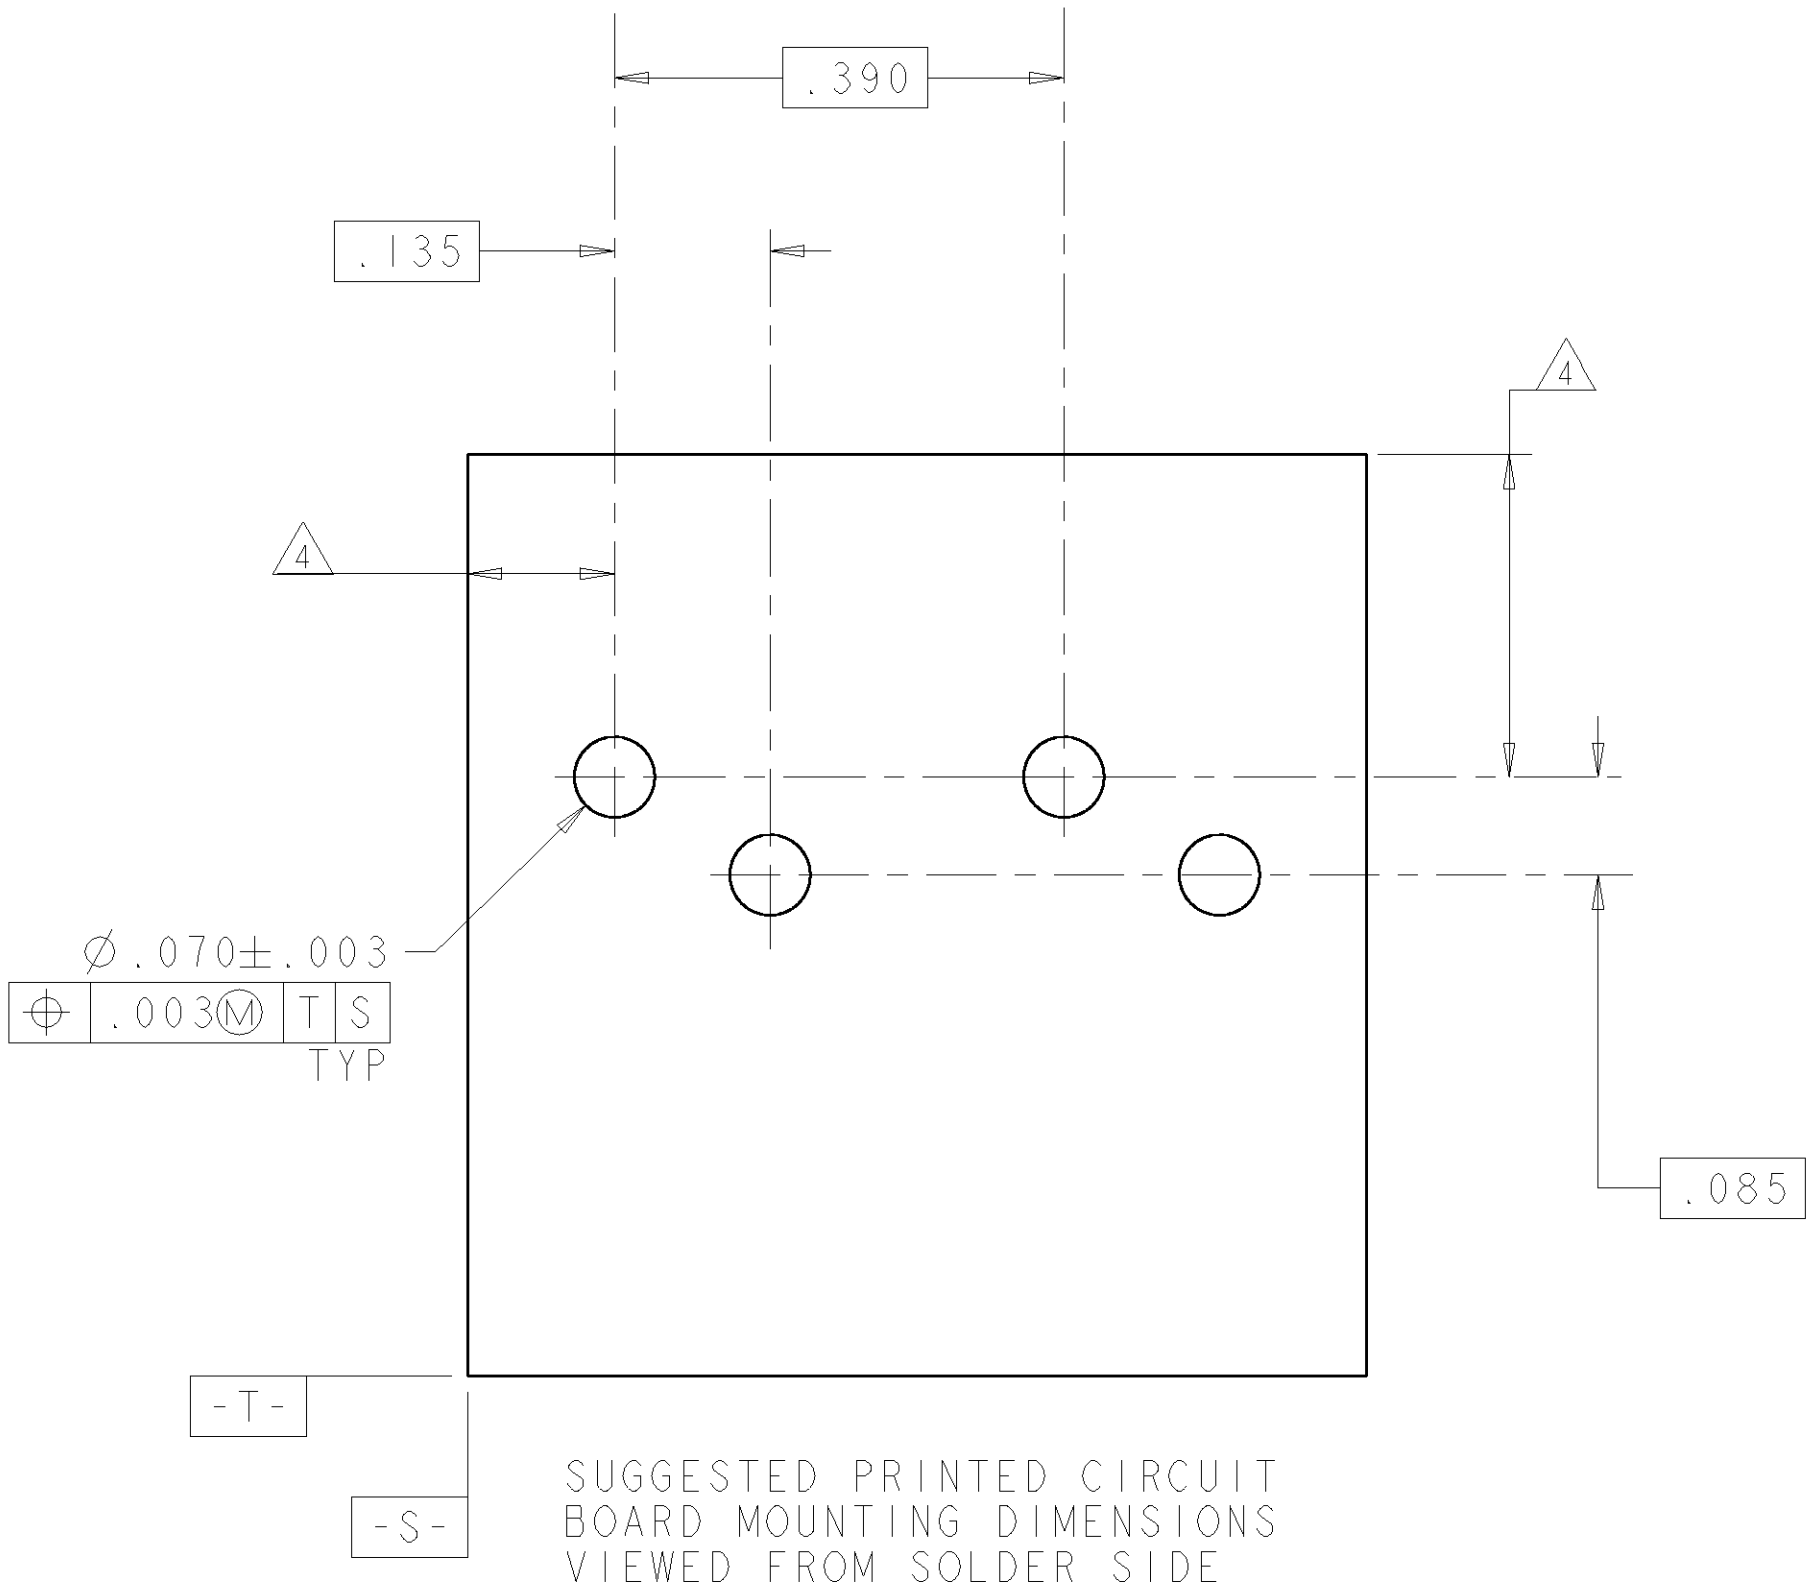

TAPE & REEL	GREEN	GREEN	TAN	1-1339223-1
TRAY	RED	GREEN	TAN	1339223-1
PACKAGING	R	T	WIRE STUFFER	PART NUMBER
COLOR CODE				
THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R. ZARBOCK 05OCT99	AMP Incorporated	
DIMENSIONS: INCHES		CHK M. DERSTINE 05OCT99	Harrisburg, PA 17105-3608	
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD M. DERSTINE 05OCT99	NAME	
0 PLC ±.01		PRODUCT SPEC	ASSEMBLY,	
1 PLC ±.01		-	DOUBLE PAIR, SINGLE ENTRY,	
2 PLC ±.005		APPLICATION SPEC	PIVOT II CONNECTOR	
3 PLC ±.005		-	SIZE	
4 PLC ±.005		-	CAGE CODE	
ANGLES ±.005		-	DRAWING NO	
FINISH -		WEIGHT -	C=1339223	
MATERIAL		CUSTOMER DRAWING	SCALE 6:1 SHEET 1 OF 1 REV G	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1339223-1](#)