


LOC		DIST		REV		DATE		APP	
G	14	P	F	2008	LTM	REVISIONS		DESCRIPTION	
						REVISED PER 0720-0230-93		2/25/04	

METRIC

DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE		E13288 Listed	
22-16 AWG STRANDED		22-16 AWG STRANDED	
LR7189 Certified		MILITARY P/N AND CLASS	
NOT CERTIFIED		NOT APPLICABLE	

STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

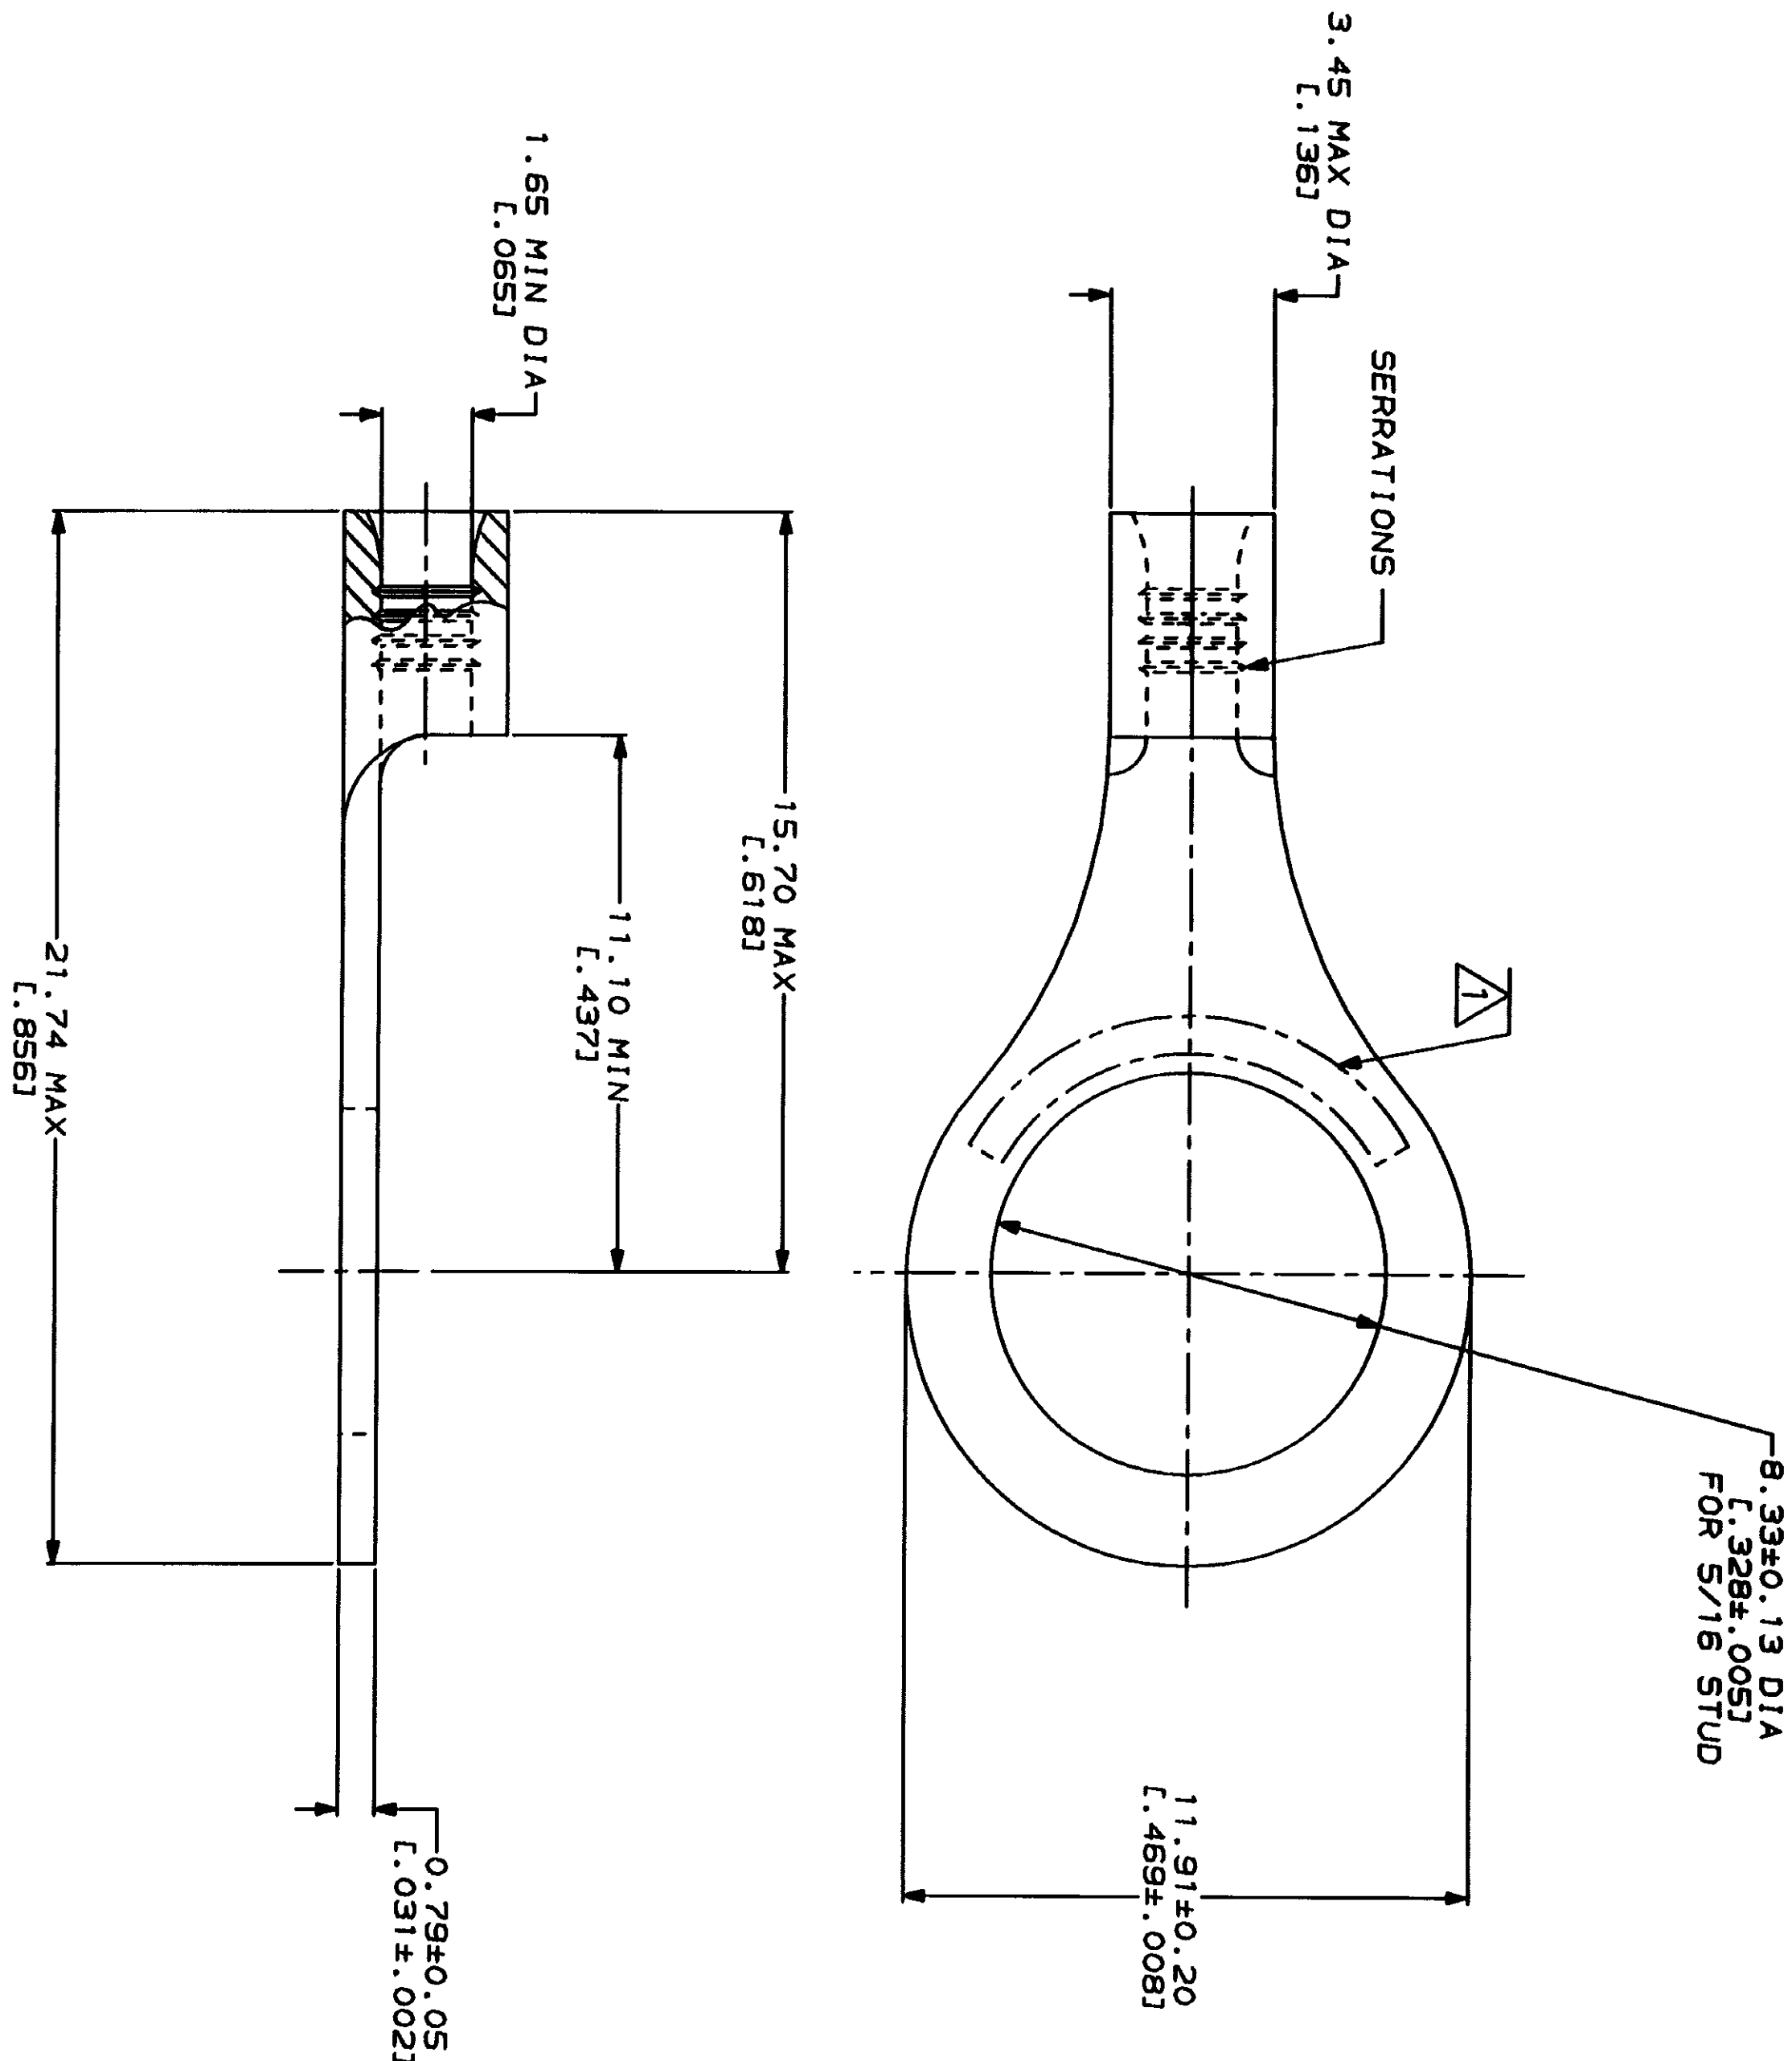

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 0.26-1.65mm² (509-3,260) CIR MILS STRANDED	
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A TECHNICAL DOCUMENT FOR THE CONTRACTING AND MANUFACTURING COMMUNITIES. IT SHOULD BE CONTACTED FOR THE LATEST REVISION.	

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± .005 3 PLC DEC ± .002 ANGLES ± .1		DR 2-3-93 TA BRIKMAN	NAME	
MATERIAL COPPER PER ASTM B-152 ANNEALED		CHK 2-3-93 DA PATTERSON	AMP Incorporated Harrisburg, PA 17105-3608	
FINISH TIN PLATE 0.00254L (0.00100) MIN THK PER MIL-T-10727		APPD 2-3-93 DE MILLER	TERMINAL, RING TONGUE, BUDGET	
APPLICATION SPEC		PRODUCT SPEC	SIZE	
WEIGHT			CAGE CODE	
			DRAWING NO	
			SCALE	
			SHEET	

5000	ON TAPE	3-31173-3
---	LOOSE PIECE	31173
QUANTITY	PACKAGE TYPE	PART NO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-31173-3](#)