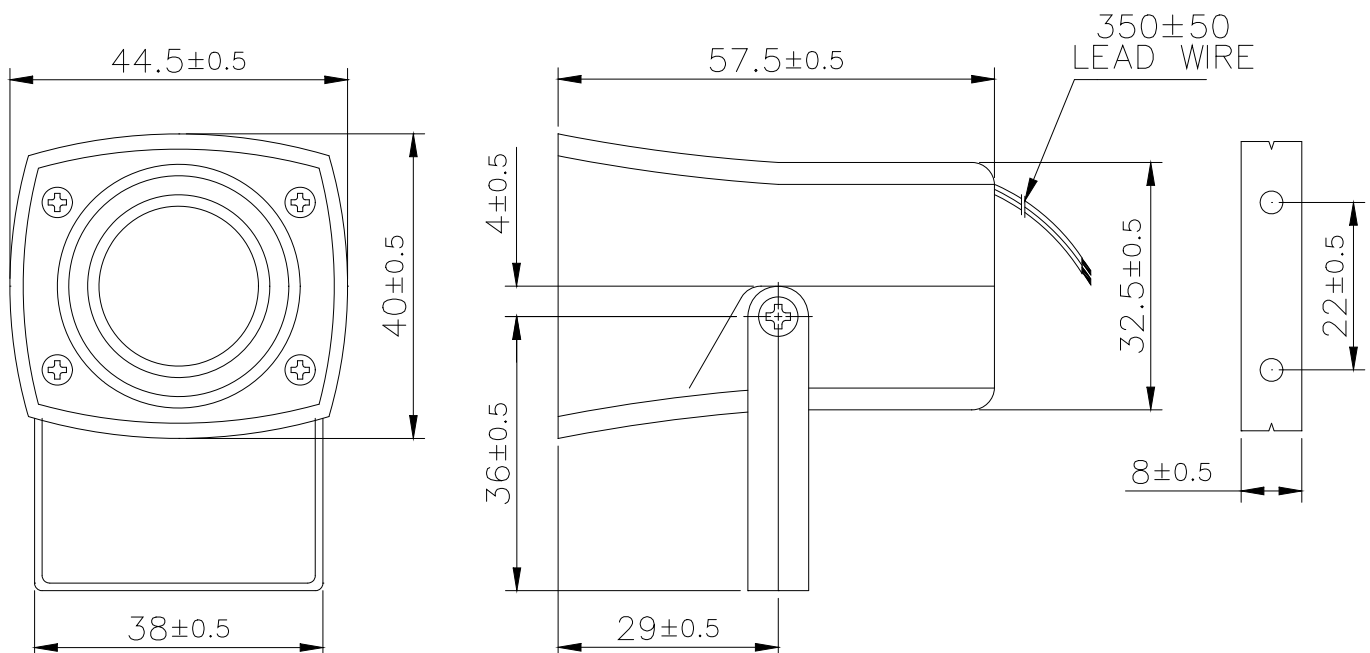


**Specifications:**

|                                |                                                |
|--------------------------------|------------------------------------------------|
| Resonant Frequency (Hz)        | 3000 $\pm$ 0.5                                 |
| Operating Voltage (Vdc)        | 5 ~ 15                                         |
| Rated Voltage (Vdc)            | 12                                             |
| Current Consumption Max. (mA)  | 200 at Rated Voltage                           |
| Sound Pressure Level Min. (dB) | 105 at 100cm at Rated Voltage                  |
| Tone/Pulse Rate (Hz)           | Pulse 1.2 $\pm$ 20%                            |
| Operating Temperature (°C)     | -20 ~ +70                                      |
| Storage Temperature (°C)       | -30 ~ +80                                      |
| Housing                        | ABS 757 UL94HB plastic resin<br>(Color: Black) |
| Leading Wire                   | 20 AWG                                         |
| Weight (Grams)                 | 55.8                                           |
| Options                        | For other options contact factory              |

**RoHS Compliant**
**Dimensions:** (units: mm)


# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[PS-521Q](#) [PS-562-AQ](#) [PS-580AQ](#)