



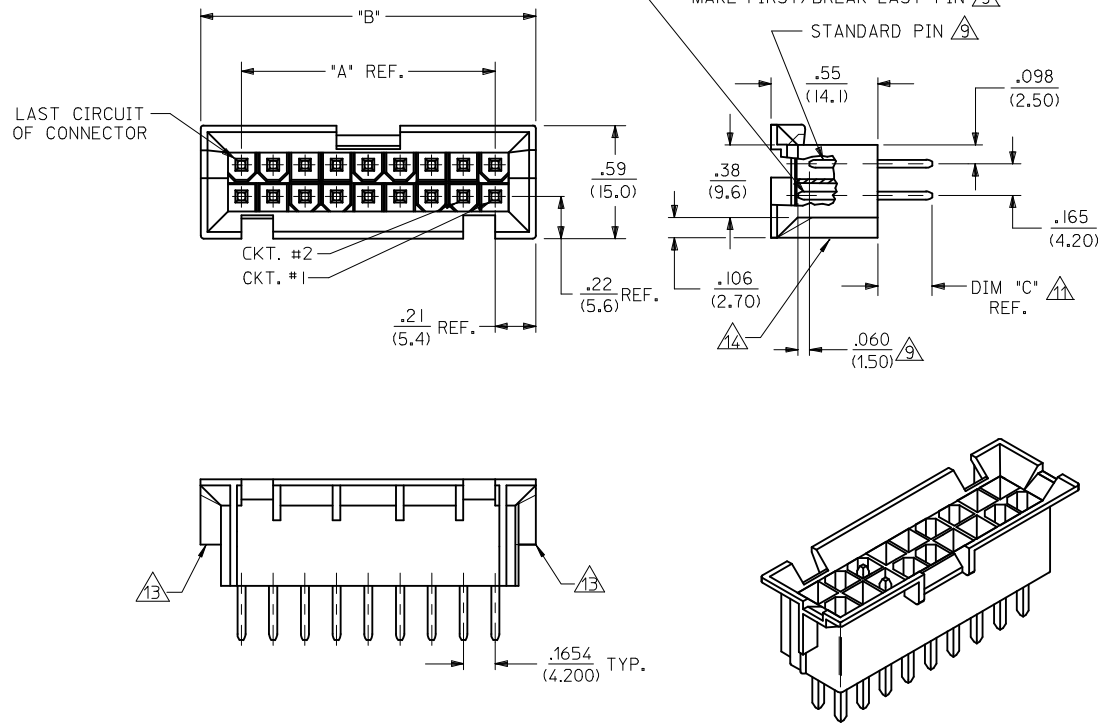


18 CKT PART SHOWN

- NOTES:**
- HOUSING MATERIAL: A = NYLON 6/6. U.L. 94V-2. COLOR: NATURAL.
B = NYLON 6/6. U.L. 94V-0. COLOR: NATURAL.
C = PBT POLYESTER 94V-0 COLOR: BLACK
TERMINAL MATERIAL: BRASS ALLOY
 - TERMINAL PLATING
A = .000100/(.00254) MIN. MATTE TIN OVER
.000050/(.00127) MIN. NICKEL.
C = .000030/(0.00076) MIN. SELECT GOLD AND
.000100/(0.00254) MIN. SELECT MATTE TIN
OVER .000050/(0.00127) MIN. NICKEL OVERALL
D = .000060/(0.00152) MIN. REFLOWED MATTE TIN OVER
.000050/(0.00127) MIN. NICKEL OVERALL.
 - PRODUCT SPECIFICATION: PS-5556-002
 - PACKAGING IN TRAYS PER PK-42404-002 EXCEPT 43693-0024 PACKAGED BULK
 - PART MATES WITH MINI-FIT JR. RECEPTACLES 5557, 42385, 42474 AND 44516.
 - PART ALLOWS FOR UP TO .100(2.54) MISALIGNMENT WITH MATING RECEPTACLE IN ANY DIRECTION. SEE MATING CONNECTOR DRAWINGS FOR SPECIFIC ALLOWANCE.
 - PARTS ARE NOT DESIGNED FOR CURRENT SHARING.
 - CONNECTORS ASSEMBLIES ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
 - SEE CHART ON SHEET 2 FOR STANDARD, MAKE-FIRST/BREAK-LAST AND PLATING LOCATIONS.
 - ITEM NUMBERS PRECEDED BY AN "X" IN THE CHART ARE NOT AVAILABLE.
 - REFERENCE DIMENSION "C" NOT TO EXCEED .283(7.20) NOMINAL.
 - DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC ' SPECIFICATION PS-45499-002, EXCEPT CLASS "C" ON BOTH SIDE RIBS.
 - CUT OFF PEGS NOT TO PROTRUDE MORE THAN .030(0.76) ON ALL CIRCUIT SIZES EXCEPT 18 CIRCUIT PARTS WILL NOT HAVE CUT OFF PEGS.

36	2.811 (71.40)	3.236 (82.20)
24	1.819 (46.20)	2.244 (57.00)
22	1.654 (42.00)	2.079 (52.80)
20	1.488 (37.80)	1.913 (48.60)
18	1.323 (33.60)	1.748 (44.40)
16	1.157 (29.40)	1.583 (40.20)
14	.992 (25.20)	1.417 (36.00)
12	.827 (21.00)	1.252 (31.80)
10	.661 (16.80)	1.087 (27.60)
8	.496 (12.60)	.921 (23.40)
6	.331 (8.40)	.756 (19.20)
4	.165 (4.20)	.590 (15.00)
2	—	.425 (10.80)
CKT. SIZE	DIM. "A"	DIM. "B"

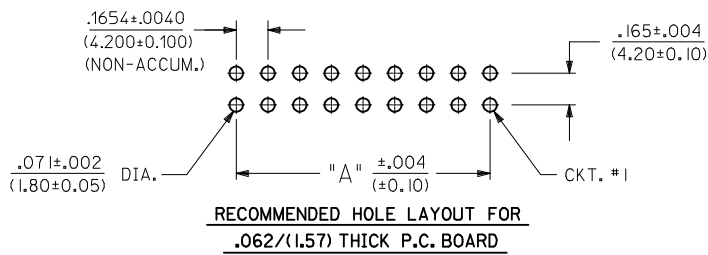


RECOMMENDED HOLE LAYOUT FOR
.062/(1.57) THICK P.C. BOARD

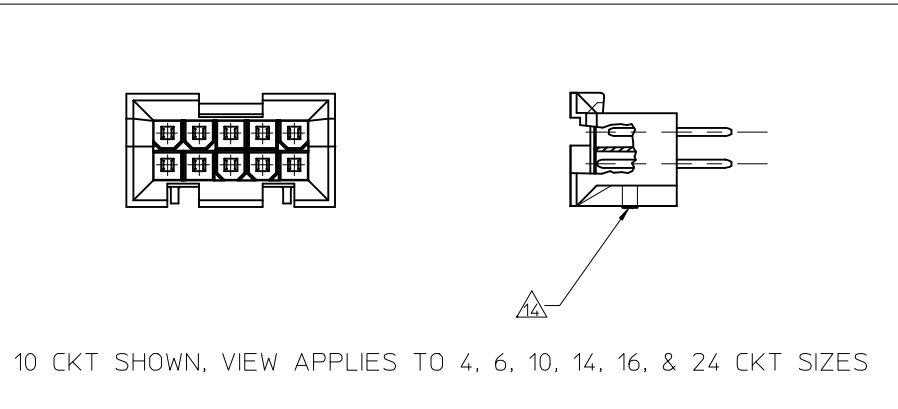

10 CKT SHOWN, VIEW APPLIES TO 4, 6, 10, 14, 16, & 24 CKT SIZES

UPDATE NOTE 14 EC NO: UCP2015-4258 DRWN: JONT CHKD: JELL APPR: FSMITH REV D2	DESCRIPTION 2015/06/25 2015/06/25 2015/07/10	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY GEP	DATE 3/11/96	TITLE VERT. HEADER ASSY WITH MAKE-FIRST/BREAK-LAST MINI-FIT B.M.I. SERIES MOLEX INCORPORATED	DOCUMENT NO. SDA-43693-****	SHEET NO. 1 OF 2
			4 PLACES	± ---	± ---	CHECKED BY RFJ	DATE 3/11/96			
			3 PLACES	± ---	± .015	APPROVED BY RFJ	DATE 3/11/96			
			2 PLACES	± 0.38	± ---	ANGULAR ± 1/2°				
			1 PLACE	± ---	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				
			SEE CHART		SIZE THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					


	13	12	11	10	9	8	7	6	5	4	3	2	1																									
J	ITEM NO.	CHARACTERISTIC DESCRIPTION	CKT. SIZE	TERMINAL VERSION				REQUIRED AT EACH CIRCUIT LOCATION: 'S' = STD. LENGTH 'M' = MAKE-FIRST/BREAK-LAST 'V' = VOIDED CIRCUIT																DIM 'C' REF.														
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		21	22	23	24	25	26	27	28	29	30	31	32	33	34
	43693-0001	IOAC	10	CS	CS	CM	CS	CS	CS	CM	CS	CS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.283 (7.20)		
	43693-0002	24BA	24	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AS	AM	AM	AM	AM	AM	AM	-	-	-	-	-	-	-	-	-	-	.154 (3.91)		
	43693-0005	I6BA	16	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.150 (3.81)			
	43693-0020	I8BA	18	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.209 (5.31)			
	43693-0022	IOBA	10	AS	AM	AM	AM	AM	AM	AM	AM	AM	AM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.154 (3.91)			
I	43693-0024	10BC	10	CS	CS	CM	CS	CS	CM	CM	CM	CS	CS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.321 (8.15)			
	43693-0027	I8BA	18	AS	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.258 (6.55)			
	43693-0030	I8BA	18	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	AS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.283 (7.20)			
	43693-0031	I8BA	18	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AM	AS	AM	AM	AM	AM	AM	AM	-	-	-	-	-	-	-	-	-	-	-	.154 (3.91)		
	43693-0037	18BD	18	DS	DM	DM	DM	DM	DM	DM	DM	DM	DM	DM	DM	DM	DM	DM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.258 (6.55)			
H	X = NOT AVAILABLE SEE NOTE 10																																					H
G																																						G
F																																						F
E																																						E
D																																						D
C																																						C
B																																						B
A																																						A
CHARACTERISTICS LEGEND:		TERMINAL PLATING (SEE NOTE 2)																																				
CIRCUIT SIZE		A = MATTE TIN																																				
(02-24 & 36)		C = SELECT GOLD																																				
		D = REFLOW MATTE TIN																																				
HOUSING MAT'L (SEE NOTE 1)																																						
A = NYLON 6/6, U.L. 94V-2, COLOR: NATURAL																																						
B = NYLON 6/6, U.L. 94V-0, COLOR: NATURAL																																						
C = PBT POLYESTER 94V-0, COLOR: BLACK																																						
SEE SHEET 1																																						
EC NO: UCP2015-4258																																						
DRWN: JONTI																																						
CHKD: IBELL																																						
APPR: FSMITH																																						
D2																																						
REV																																						
QUALITY SYMBOLS																																						
GENERAL TOLERANCES (UNLESS SPECIFIED)																																						
4 PLACES																																						
3 PLACES																																						
2 PLACES																																						
1 PLACE																																						
ANGULAR ±1/2°																																						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																																						
DIMENSION STYLE																																						
IN/MM																																						
DRAWN BY																																						
DATE																																						
CHECKED BY																																						
DATE																																						
APPROVED BY																																						
DATE																																						
MATERIAL NO.																																						
SEE CHART																																						
DOCUMENT NO.																																						
SHEET NO.																																						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																						
12		1																																				
11		2																																				
10		3																																				
9		4																																				
8		5																																				
7		6																																				
6		7																																				
5		8																																				
4		9																																				
3		10																																				
2		11																																				
1		12																																				

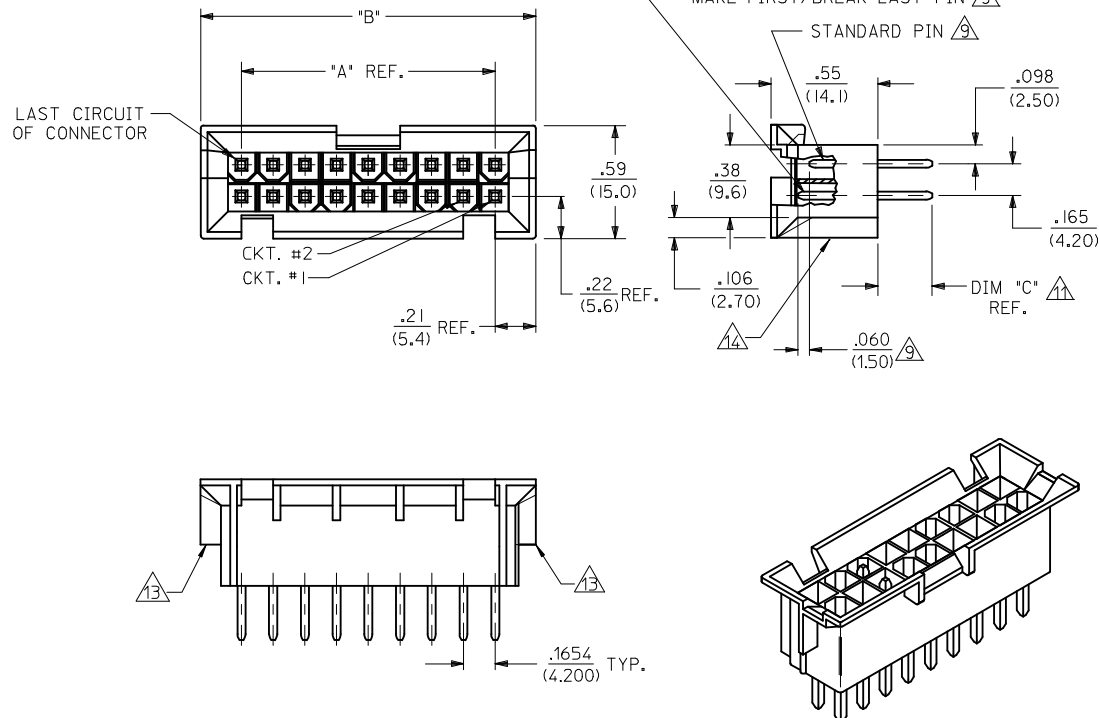


18 CKT PART SHOWN

- NOTES:**
- HOUSING MATERIAL: A = NYLON 6/6. U.L. 94V-2. COLOR: NATURAL.
B = NYLON 6/6. U.L. 94V-0. COLOR: NATURAL.
C = PBT POLYESTER 94V-0 COLOR: BLACK
TERMINAL MATERIAL: BRASS ALLOY
 - TERMINAL PLATING
A = .000100/(.00254) MIN. MATTE TIN OVER
.000050/(.00127) MIN. NICKEL.
C = .000030/(0.00076) MIN. SELECT GOLD AND
.000100/(0.00254) MIN. SELECT MATTE TIN
OVER .000050/(0.00127) MIN. NICKEL OVERALL
D = .000060/(0.00152) MIN. REFLOWED MATTE TIN OVER
.000050/(0.00127) MIN. NICKEL OVERALL.
 - PRODUCT SPECIFICATION: PS-5556-002
 - PACKAGING IN TRAYS PER PK-42404-002 EXCEPT 43693-0024 PACKAGED BULK
 - PART MATES WITH MINI-FIT JR. RECEPTACLES 5557, 42385, 42474 AND 44516.
 - PART ALLOWS FOR UP TO .100(2.54) MISALIGNMENT WITH MATING RECEPTACLE
IN ANY DIRECTION. SEE MATING CONNECTOR DRAWINGS FOR SPECIFIC ALLOWANCE.
 - PARTS ARE NOT DESIGNED FOR CURRENT SHARING.
 - CONNECTORS ASSEMBLIES ARE NOT TO BE MATED OR UNMATED WHILE
CIRCUITS ARE LIVE.
 - SEE CHART ON SHEET 2 FOR STANDARD, MAKE-FIRST/BREAK-LAST AND
PLATING LOCATIONS.
 - ITEM NUMBERS PRECEDED BY AN "X" IN THE CHART ARE NOT AVAILABLE.
 - REFERENCE DIMENSION "C" NOT TO EXCEED .283(7.20) NOMINAL.
 - DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS
INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING
EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL
AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE
HEADER ASSEMBLY.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC '
SPECIFICATION PS-45499-002, EXCEPT CLASS "C" ON BOTH SIDE RIBS.
 - CUT OFF PEGS NOT TO PROTRUDE MORE THAN .030(0.76) ON ALL CIRCUIT SIZES
EXCEPT 18 CIRCUIT PARTS WILL NOT HAVE CUT OFF PEGS.

36	2.811 (71.40)	3.236 (82.20)
24	1.819 (46.20)	2.244 (57.00)
22	1.654 (42.00)	2.079 (52.80)
20	1.488 (37.80)	1.913 (48.60)
18	1.323 (33.60)	1.748 (44.40)
16	1.157 (29.40)	1.583 (40.20)
14	.992 (25.20)	1.417 (36.00)
12	.827 (21.00)	1.252 (31.80)
10	.661 (16.80)	1.087 (27.60)
8	.496 (12.60)	.921 (23.40)
6	.331 (8.40)	.756 (19.20)
4	.165 (4.20)	.590 (15.00)
2	—	.425 (10.80)
CKT. SIZE	DIM. "A"	DIM. "B"

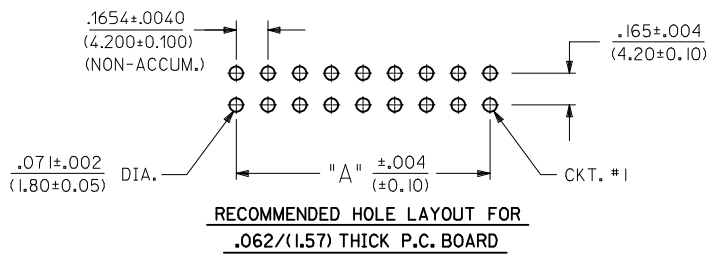

RECOMMENDED HOLE LAYOUT FOR
.062/(1.57) THICK P.C. BOARD

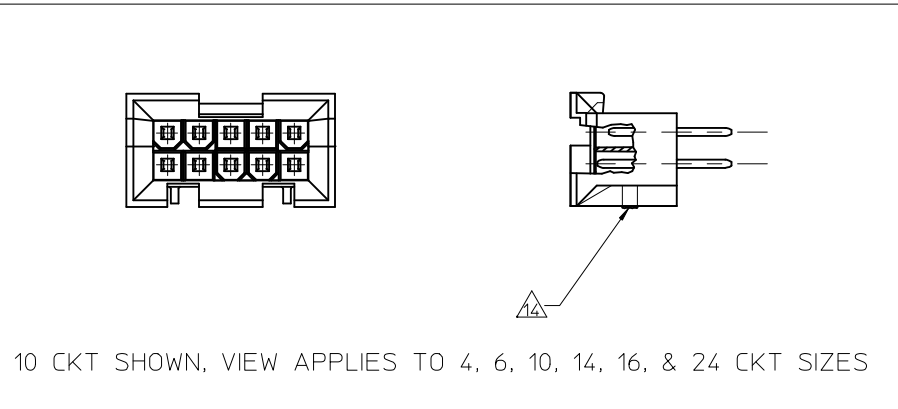

10 CKT SHOWN, VIEW APPLIES TO 4, 6, 10, 14, 16, & 24 CKT SIZES

UPDATE NOTE 14 EC NO: UCP2015-4258 DRWN: JONT CHKD: JELL APPR: FSMITH 2015/06/25 2015/06/25 2015/07/10	QUALITY SYMBOLS	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY GEP	DATE 3/11/96	TITLE VERT. HEADER ASSY WITH MAKE-FIRST/BREAK-LAST MINI-FIT B.M.I. SERIES		
			4 PLACES	± ---	± ---	CHECKED BY RFJ	DATE 3/11/96			
			3 PLACES	± ---	± .015	APPROVED BY RFJ	DATE 3/11/96			
			2 PLACES	± 0.38	± ---	MOLEX INCORPORATED				
			1 PLACE	± ---	± ---					
			ANGULAR ±1/2°			MATERIAL NO. SEE CHART		DOCUMENT NO. SDA-43693-****		SHEET NO. 1 OF 2
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

13		12		11				10				9				8				7				6				5				4				3				2				1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
ITEM NO.		CHARACTERISTIC DESCRIPTION		CKT. SIZE		TERMINAL VERSION				REQUIRED AT EACH CIRCUIT LOCATION:				'S' = STD. LENGTH				'M' = MAKE-FIRST/BREAK-LAST				'V' = VOIDED CIRCUIT																				DIM "C" REF.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
J	43693-0001	IOAC		10		CS CS CM CS				CS CS CS CM				CS CS - - - -				- - - -				- - - -				- - - -				- - - -				- - - -				- - - -				.283 (7.20)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	43693-0002	24BA		24		AM AM AM AM				AM AM AM AM				AM AM AM AM				AM AM AS AM				AM AM AM AM				AM AM AM AM				AM AM - - - -				- - - -				- - - -				.154 (3.91)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	43693-0005	I6BA		16		AS AS AS AS				AS AS AS AS				AS AS AS AS				AS AS - - - -				- - - -				- - - -				- - - -				- - - -				- - - -				.150 (3.81)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
I	43693-0020	I8BA		18		AS AS AS AS				AS AS AS AS				AS AS AS AS				AS AS AS AS				AS AS - - - -				- - - -				- - - -				- - - -				- - - -				- - - -				.209 (5.31)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
	43693-0022	IOBA		10		AS AM AM AM				AM AM AM AM				AM AM - - - -				- - - -				- - - -				- - - -				- - - -				- - - -				- - - -				.154 (3.91)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	43693-0024	10BC		10		CS CS CM CS				CS CM CM CM				CS CS - - - -				- - - -				- - - -				- - - -				- - - -				- - - -				- - - -				.321 (8.15)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	43693-0027	I8BA		18		AS AM AM AM				AM AM AM AM				AM AM AM AM				AM AM AM AM				AM AM - - - -				- - - -				- - - -				- - - -				- - - -				.258 (6.55)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	43693-0030	I8BA		18		AS AS AS AS				AS AS AS AS				AS AS AS AS				AS AS AS AS				AS AS - - - -				- - - -				- - - -				- - - -				- - - -				.283 (7.20)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	43693-0031	I8BA		18		AM AM AM AM				AM AM AM AM				AM AM AM AM				AM AM AS AM				AM AM AM AM				AM AM - - - -				- - - -				- - - -				- - - -				- - - -				.154 (3.91)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
H	43693-0037	18BD		18		DS DM DM DM				DM DM DM DM				DM DM DM DM				DM DM DM DM				DM DM - - - -				- - - -				- - - -				- - - -				- - - -				- - - -				.258 (6.55)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
	X = NOT AVAILABLE SEE NOTE 10																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
CHARACTERISTICS LEGEND:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[43693-0027](#)