

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

FT

0

A2

REVISED PER ECO-10-009375

05MAY10

HMR

CR

MATERIALS:

HOUSING: POLYAMIDE 66, UL94V-0, GREEN.

SOLDER PIN: BRASS, TIN PLATED.

KEYS: POLYAMIDE 66, UL94V-0.

ELECTRICAL:

CURRENT RATING: 12A, 300V.






INSULATION WITHSTANDS: 2000VAC MIN.

INSULATION RESISTANCE: 2000Mohm, 500VDC

OPERATING TEMP.: -40°C TO +105°C.

1 NON CUMULATIVE.

2 TE LOGO LOCATED IN APPROXIMATE AREA SHOWN.

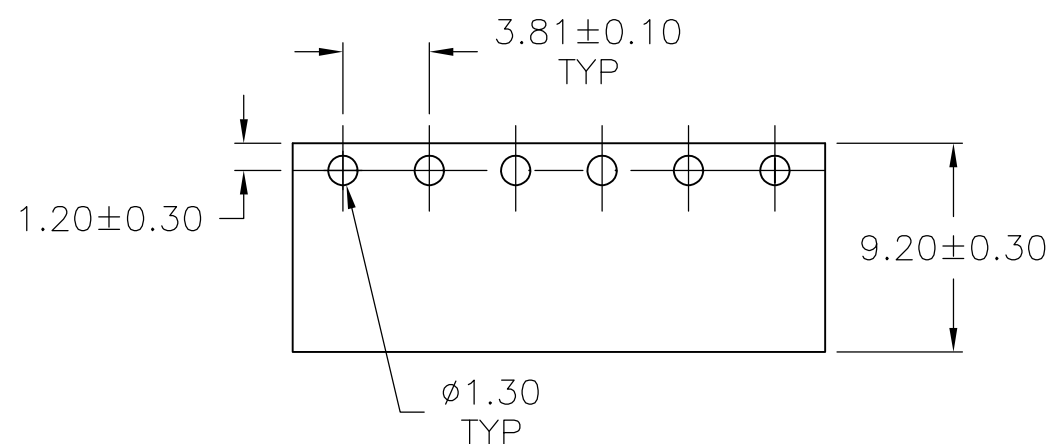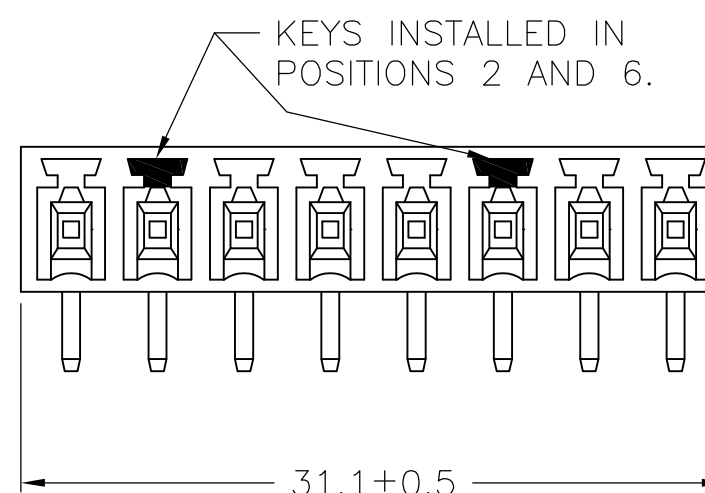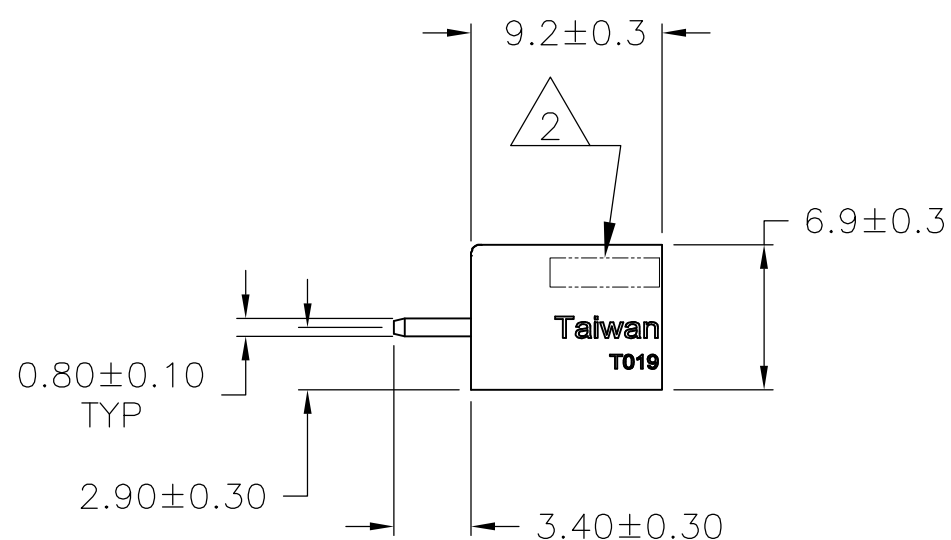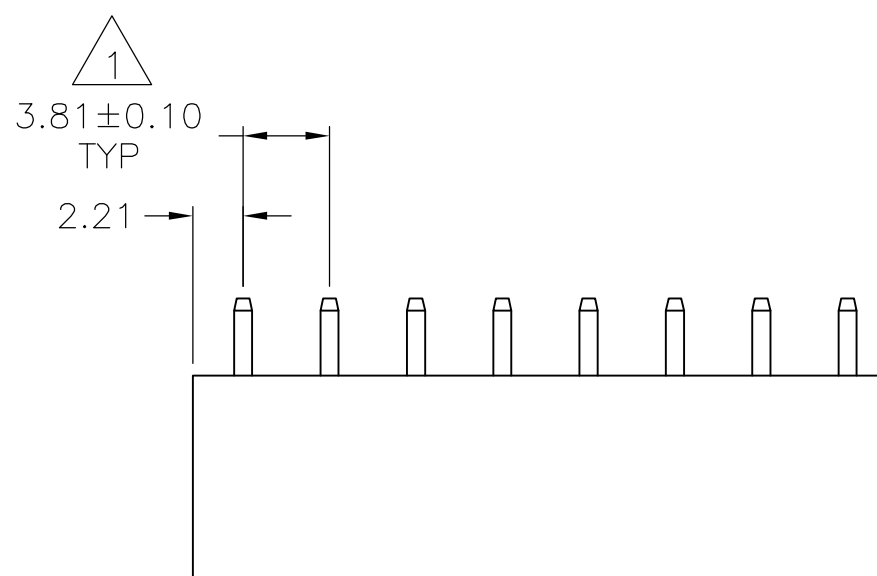

PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S SCHLEGEL 05DEC2005

CHK C RICHARD 12/5/05

APVD C RICHARD 12/5/05

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING



Tyco Electronics Corporation

Harrisburg, PA 17105-3608

NAME VERTICAL HEADER, 3.81mm

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C-1776553

SCALE 3:1 SHEET 1 OF 1 REV A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776553-8](#)