


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
J	—	B	REVISED	11MAY2011	M.M	N.Y

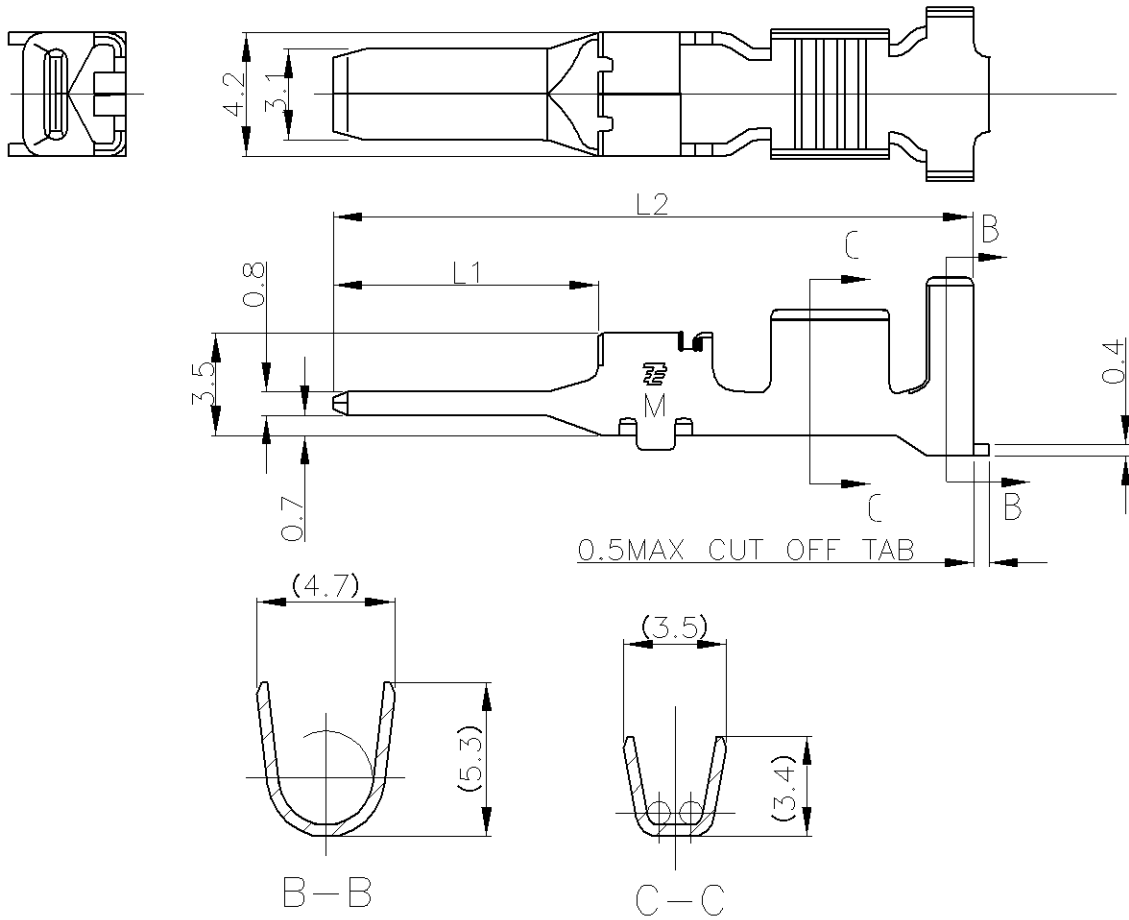

注)

- 1.一般公差: ± 0.25
- 2.材料: 銅合金全面Niめっき $1.3\mu\text{m}$ 以上
接点部金めっき $0.38\mu\text{m}$ 以上めっき
- 3.適用電線: AWG#16-#14(被覆外径 $\phi 2.0 \sim \phi 3.75$)

M SIZE

NOTES)

- 1.GENERAL TOLERANCE: ± 0.25
- 2.MATERIAL: COPPER ALLOY, FINISH: OVER NI PLATING $1.3\mu\text{m}$ MIN.
(CONTACT AREA) $0.38\mu\text{m}$ MIN GOLD PLATING
- 3.APPLICABLE WIRE: AWG#16-#14 (INS DIA $\phi 2.0 \sim \phi 3.75$)

25.5	12.75	1-1747501-2
21.8	9.05	1747501-2
L2	L1	PART NUMBER

DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: SEE NOTE 0 PLC $\pm -$ 1 PLC $\pm -$ 2 PLC $\pm -$ 3 PLC $\pm -$ 4 PLC $\pm -$ ANGLES $\pm -$	DWN T.KUDO 26AUG2004	MATERIAL COPPER ALLOY	FINISH SEE NOTE
	CHK D.MITSUGI 26AUG2004		
	APVD D.MITSUGI 26AUG2004		
	PRODUCT SPEC 108-78182	NAME DYNAMIC D-4200 TAB CONTACT M SIZE LOOSE PIECE	
	APPLICATION SPEC 114-5369	SIZE A4	CAGE CODE 00779
	WEIGHT —	DRAWING NO C-1747501	RESTRICTED TO —
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1
		REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1747501-2](#)