

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	-		A	RELEASED	17APR2008	S.F




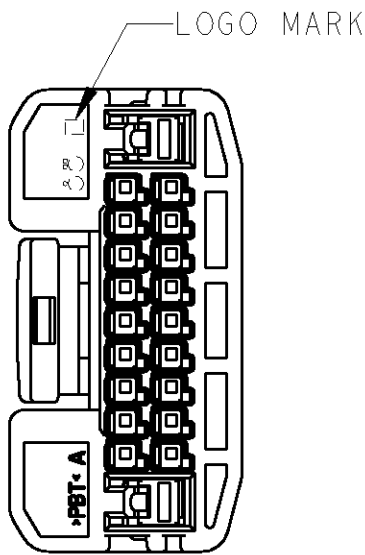


TABLE - 1

POS. 極数	CAP HOUSING P/N キャップハウジング型番
20	1674477-1

TABLE - 2

TYPE 端子種類	FINISH 仕上げ	APPLICABLE TERMINAL P/N 適用端子型番	APPLICABLE WIRE RANGE 適用電線 (mm ²)
SIGNAL 0.64	TIN	1674311-1	AVSS/AVSSH/AESSX 0.3~0.5 CAVS/CAVUS
POWER 2.3	TIN	1981341-1	AVS/CAVS/AVSS/CAVUS 0.3~0.5 AVX/AEX/ABAVX 0.5f
	TIN	1981341-2	AVS/CAVS/CAVUS 0.85~1.25 AVSS 0.75f, 0.85~2.0

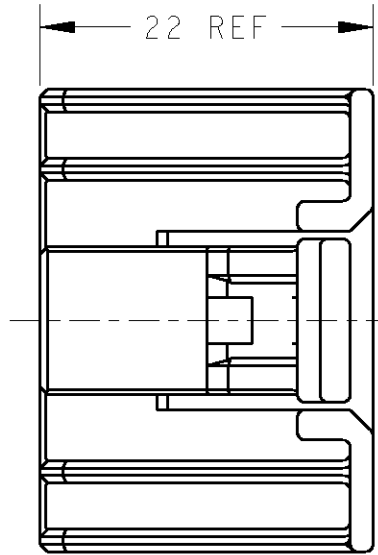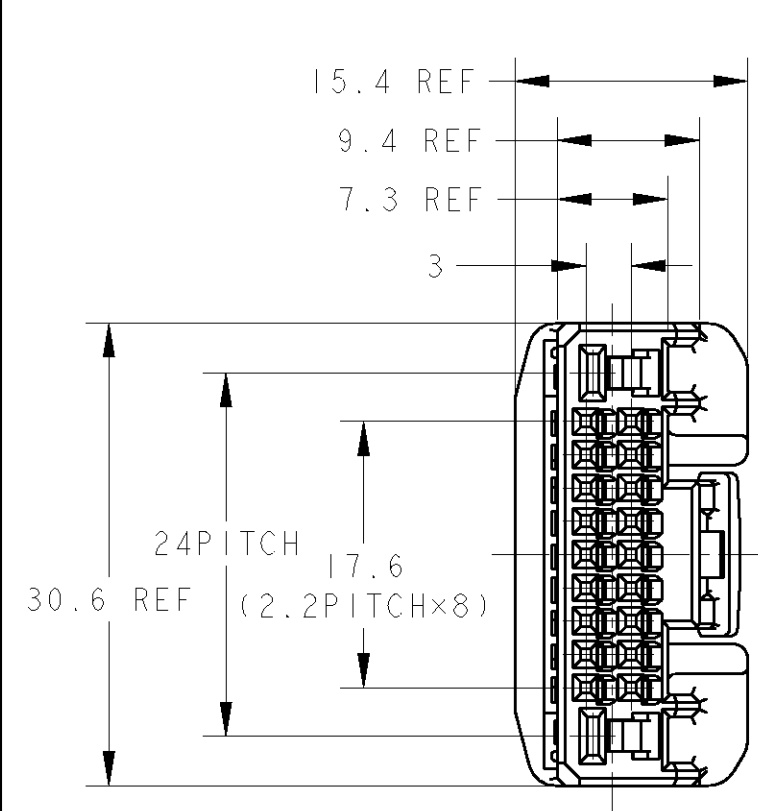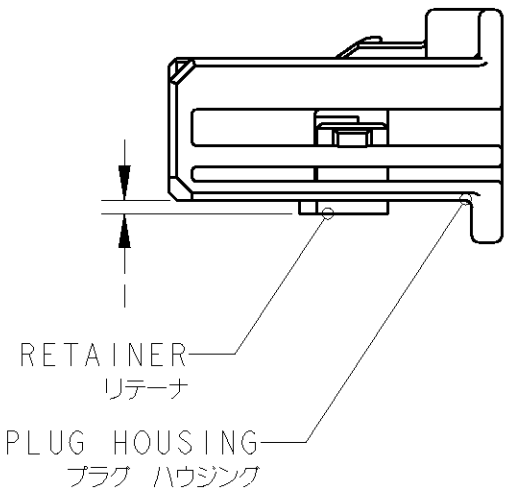

1. プラグハウジングにリテーナを仮係止して出荷される。
2. 嵌合相手型番: TABLE - 1 参照。
3. 適用端子: TABLE - 2 参照
4. 取扱説明書番号: 411-78307

1. RETAINER MUST BE SET TO THE PRE-ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER.
2. PART NUMBER OF CAP HOUSING TO BE MATED: SEE TABLE-1.
3. APPLICABLE TERMINAL: SEE TABLE-2.
4. INSTRUCTION SHEET NO.: 411-78307

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S.FURUYA 17APR2008	Tyco Electronics AMP K.K. Kawasaki, Japan		
DIMENSIONS: 単位: 概 mm		CHK T.KOHNO 17APR2008			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Y.FUJIWARA 17APR2008	NAME 名称 20POS PLUG HOUSING ASSEMBLY 0.64111/2.3TW CONNECTOR		
一般公差 ±0.3 0-PLC ± 1-PLC ±0.5 2-PLC ±0.13 3-PLC ±0.013 4-PLC ±0.001 ANGLES ±3°00'		PRODUCT SPEC 製品規格 108-78547			
MATERIAL 材料 PBT		APPLICATION SPEC 取付適用規格 114-5329, 114-5411	SIZE A3 CAGE CODE 00779 DRAWING NO C=2040487		
FINISH 仕上 SEE TABLE		WEIGHT 5 g			
CUSTOMER DRAWING			RESTRICTED TO -	SCALE 尺 2:1	SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2040487-1](#)