

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850520191

Status:

Active

Overview:

DIN 41612

Description:

2.54mm Pitch DIN 41612 Receptacle, Style R Reverse, 96 Circuits


Documents:

3D Model

RoHS Certificate of Compliance (PDF)

Drawing (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Backplane Connectors
Series	85052
Application	Backplane
Component Type	PCB Receptacle
Overview	DIN 41612
Product Name	IEC 603-2/DIN 41612
Style	R
UPC	800753857940
Physical	
Circuits (Loaded)	96
Circuits (maximum)	96
Durability (mating cycles max)	500
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	Yes
Material - Plating Mating	Gold
Net Weight	15.045/g
Number of Columns	32
Number of Pairs	Open Pin Field
Number of Rows	3
Orientation	Right Angle
PC Tail Length	2.80mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm, 3.20mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55° to +125°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	1.0A
Data Rate	622.0 Mbps
Real Signals (per 25mm)	30
Voltage - Maximum	250V AC (RMS)
Solder Process Data	
Lead-freeProcess Capability	N/A

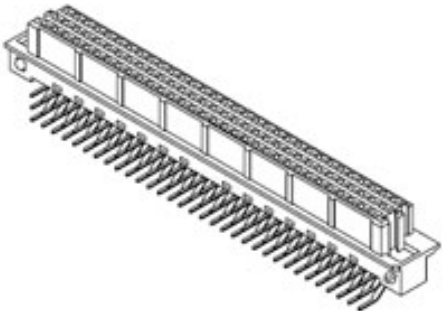

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/88/2018 (15
January 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

85052 Series

Mates With

DIN 41612 Headers 85003 , 85013

Material Info

Reference - Drawing Numbers

Sales Drawing

SDA-85052-0001, SDA-85052-0191

This document was generated on 09/18/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[85052-0191](#)