
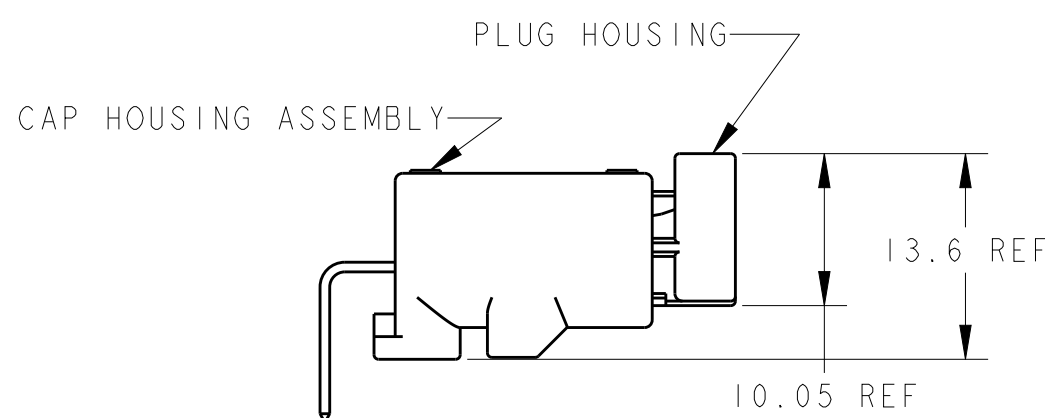
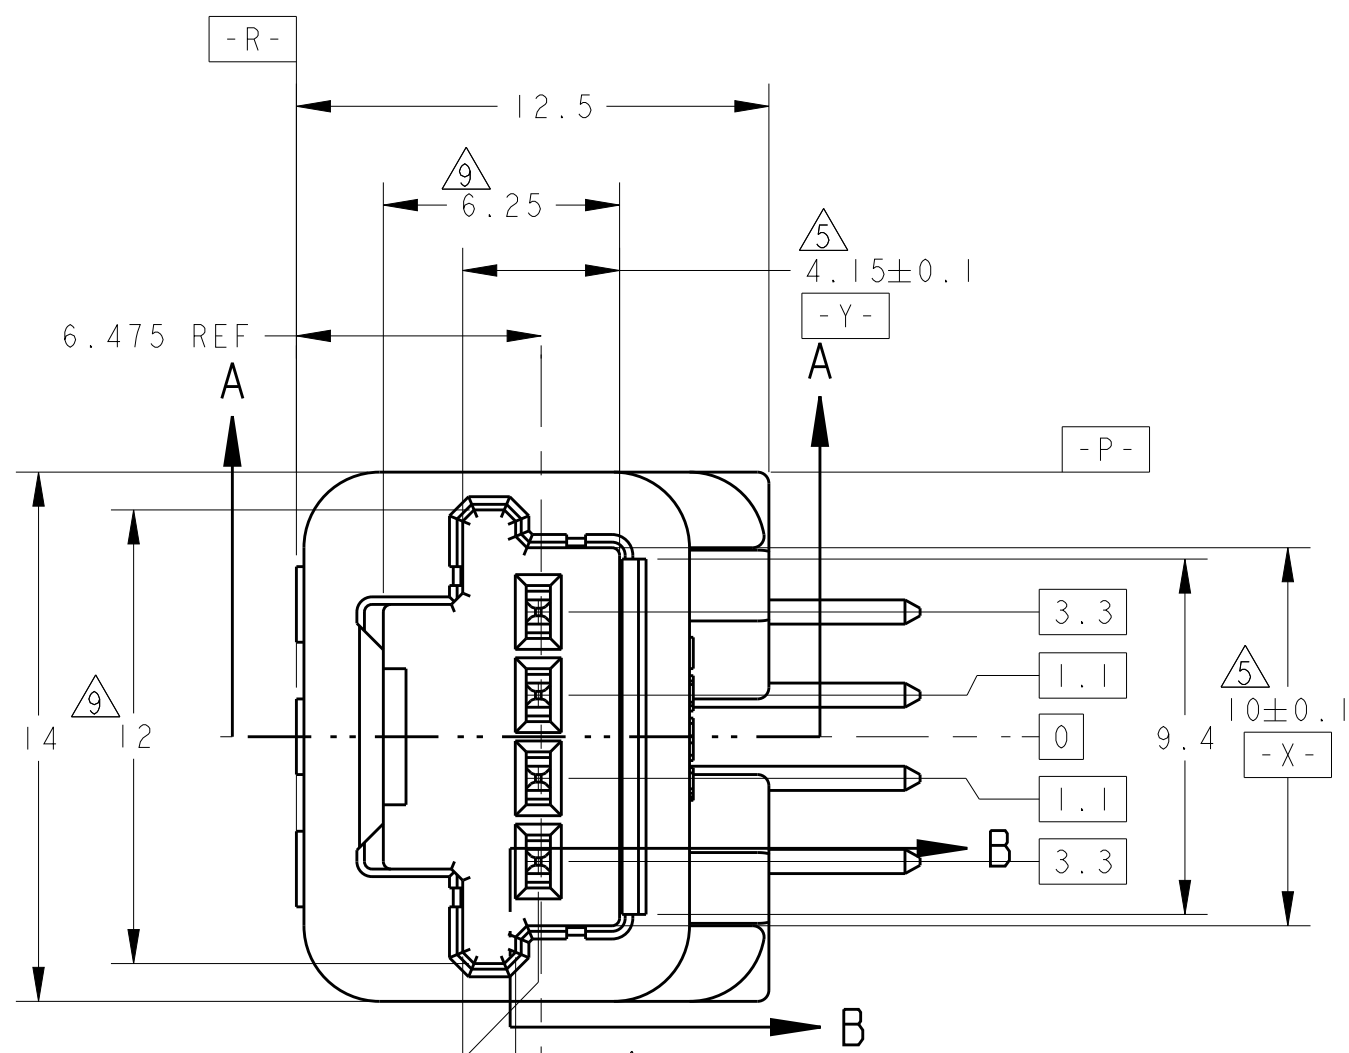



DIMENSIONS FOR P.C. BOARD
プリント基板取付寸法図
SCALE 5:1

CAP HOUSING ASSEMBLY & PLUG HOUSING ENGAGEMENT VIEW
キャップハウジング・アセンブリ&プラグハウジング嵌合状態図




SCALE 2:1

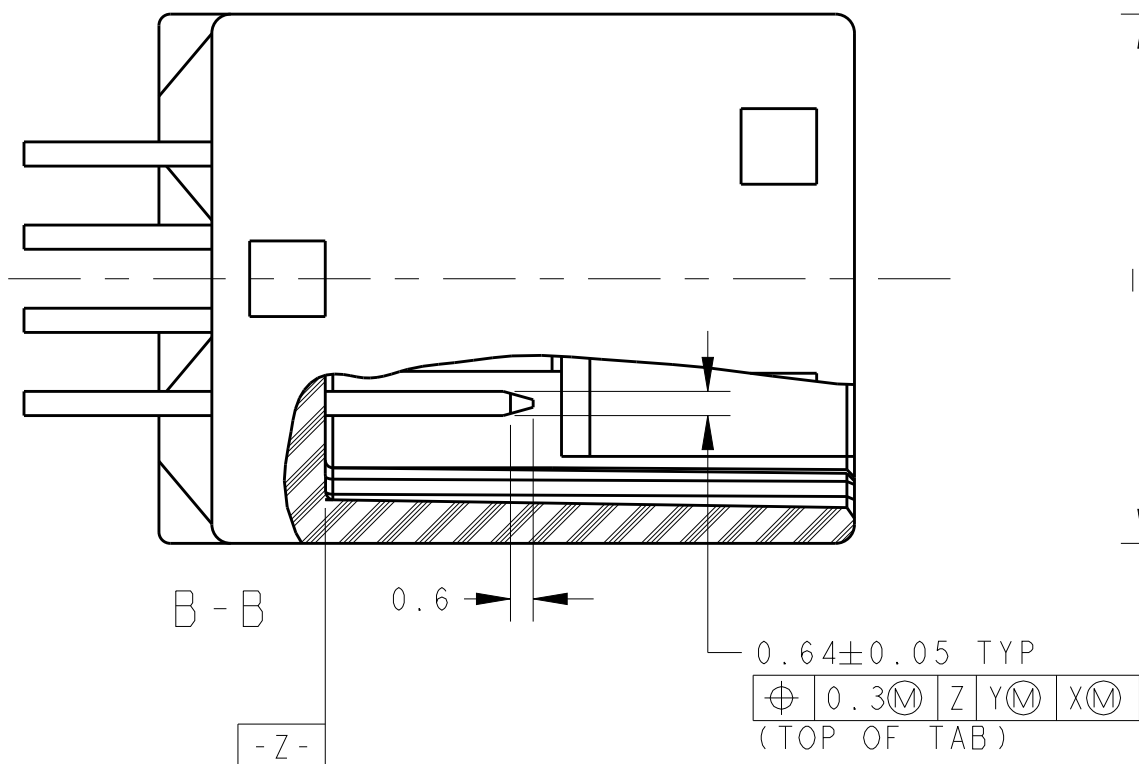

KEYING I

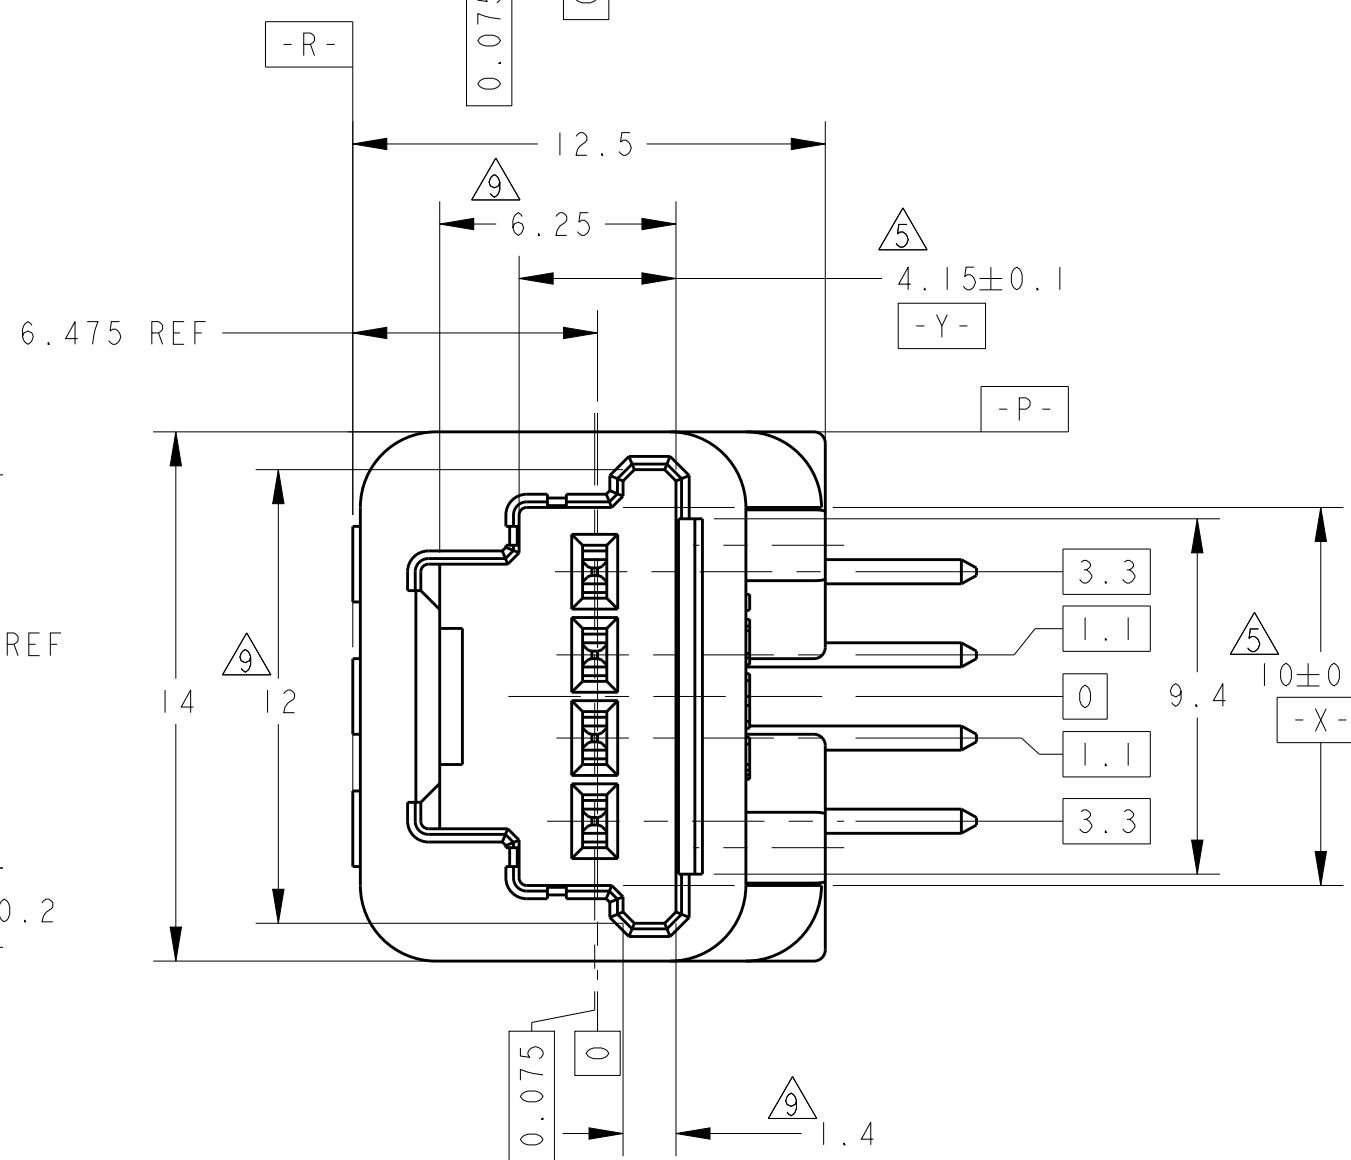

KEYING 2

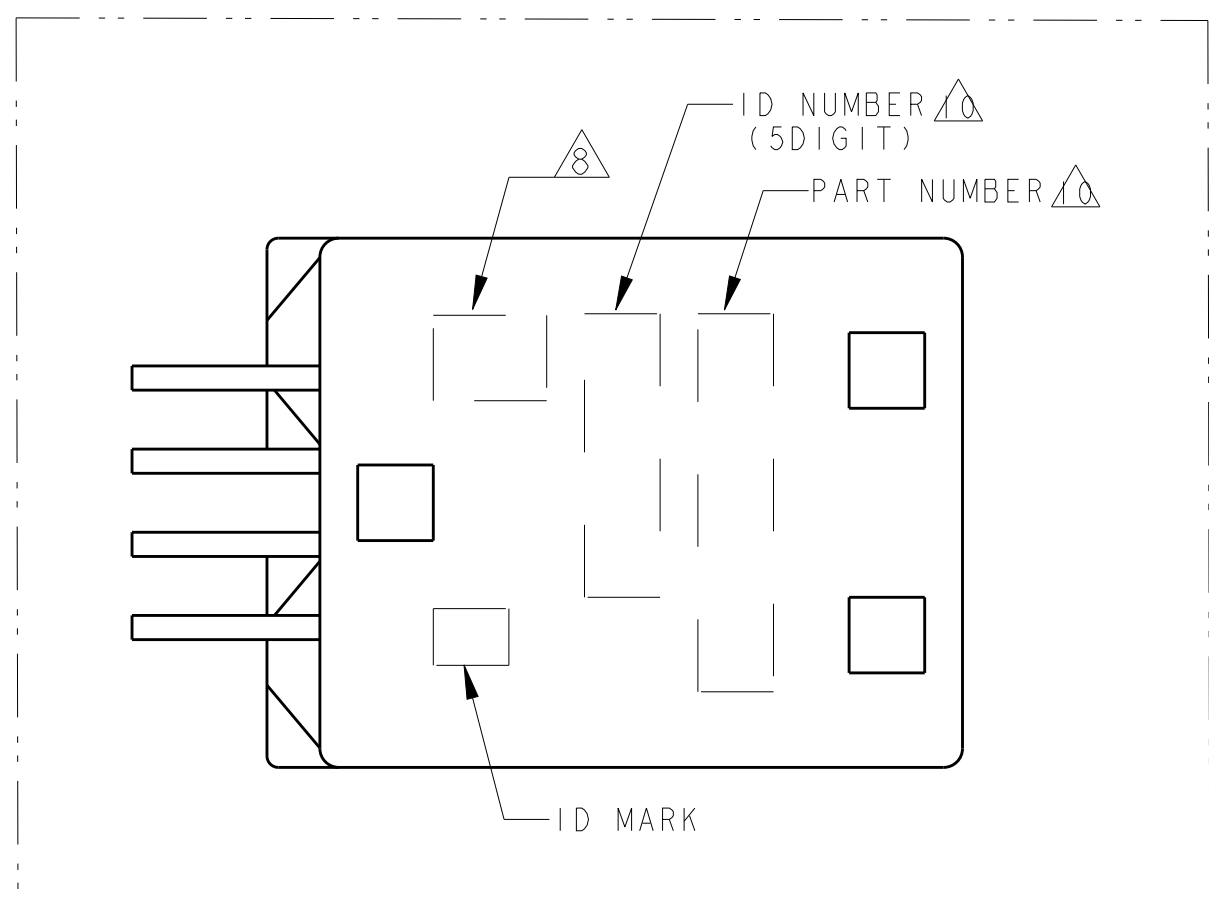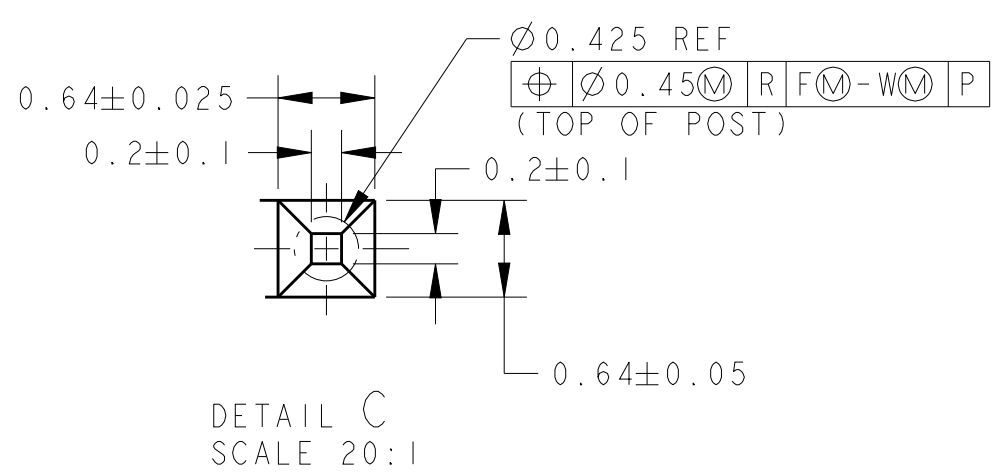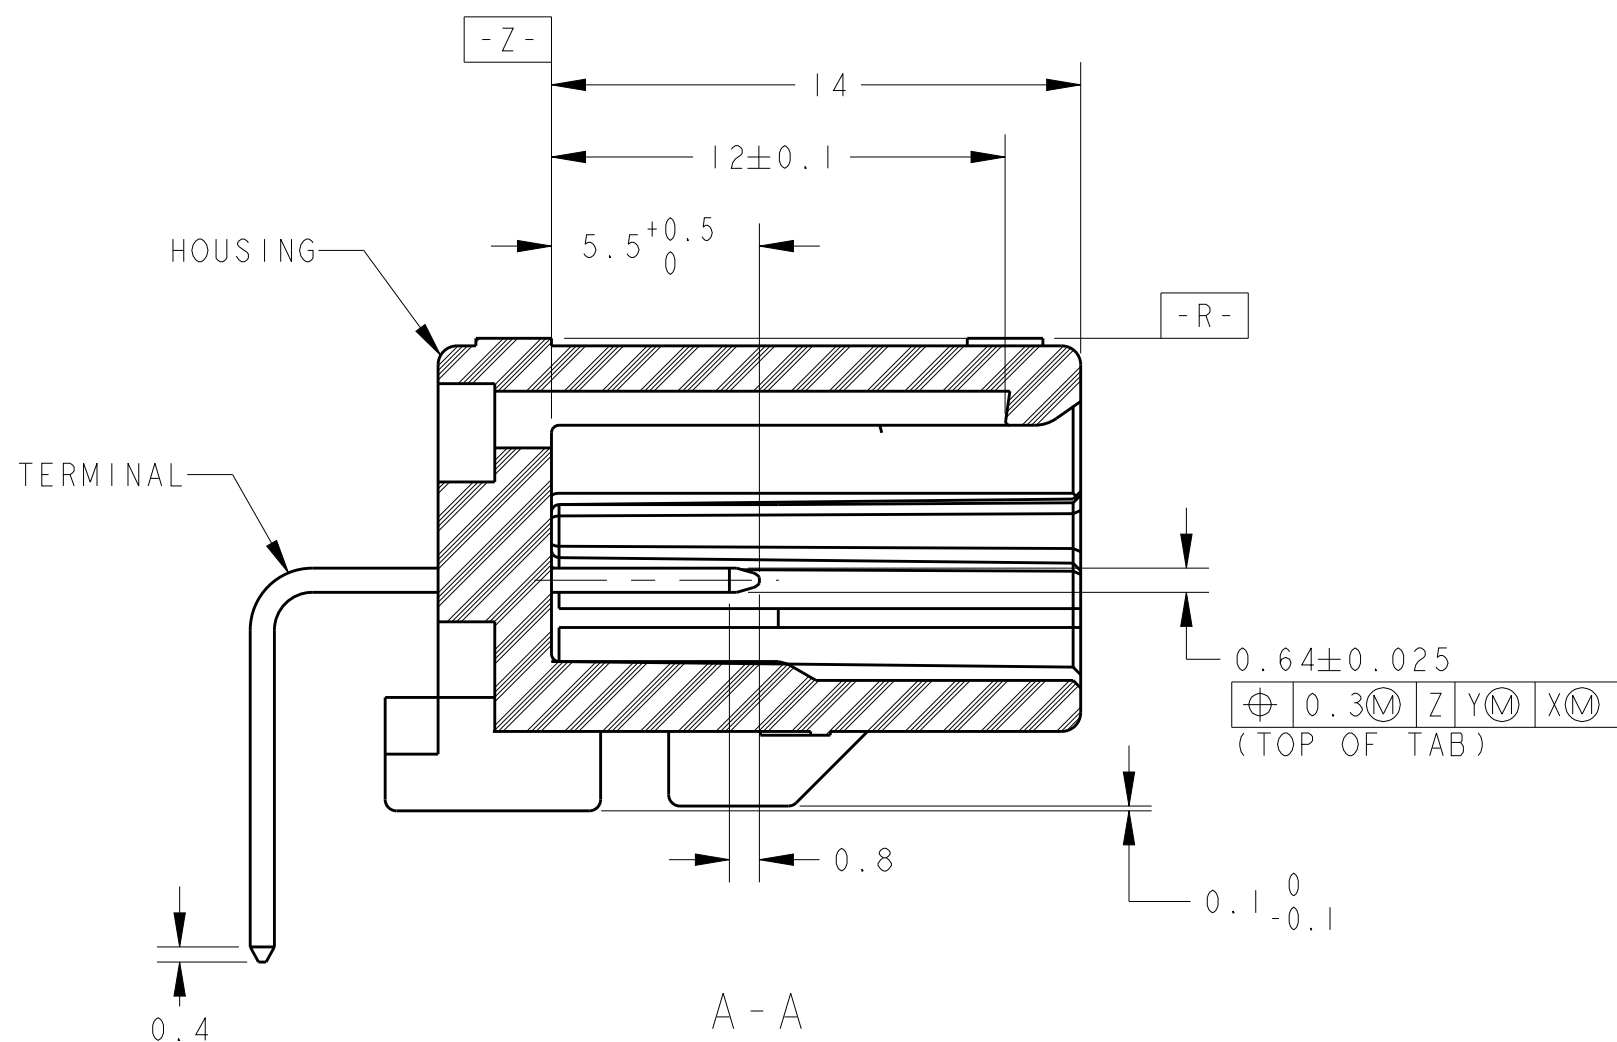

1. PLUG HOUSING TO BE MATED ; SEE TABLE-1
TO BE MATED SMOOTHLY WITH THE PLUG HOUSING
2. RECOMMENDED SCREW: PAN-HEADED, TYPE-2 TAPPING SCREW
OF 3DIA, LENGTH: SEE TABLE-2 (JIS B1115, B1122).
3. FASTENING TPOUE FOR SCREW: 0.392N·m MAX
BUT, TROUE FOR OPERATION SHOULD BE PROVIDED RESPECTIVELY.
4. AS FOR THE HANDLING OF THIS PRODUCT,
FOLLOW THE INSTRUCTION SHEET NO.411-5965

5. MEASURED AT 6mm FROM -Z-.

6. APPLICABLE PRINTED CIRCUIT BOARD: THICKNESS SEE TABLE-2
7. DETAILS OF TERMINALS TO BE MATED ; SEE TABLE-3.

⑧. IDENTIFICATION MARK FOR THE CONTACT FINISH ; SEE TABLE

9. MEASURED AT 2mm FROM -Z-.

 ID MARK, PART NUMBER INDICATED.

TABLE - I

TABLE - 2

TABLE - 3

	FINISH 仕上げ	RECEPTACLE CONTACT P/N	APPLICABLE WIRE RANGE 適用電線
SIGNAL 025	TIN	1123343-1	CAVS/CAVUS 0.22~0.5mm ² AVSS/AESSX/AVSSH-f 0.3~0.5mm ²

	2.4	Ø 2.4	PLASTIC BOX 通し箱	PLASTIC TUBE プラスチックチューブ	PRE-TINED X 4		KEYING 2	PBT GF15	GRAY	I-1565749-3
2	2.4	Ø 2.4	PAPER BOX ダンボール箱	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	KEYING 2	PBT GF15	GRAY	I-1565749-2
1	2.4	Ø 2.4	PLASTIC BOX 通し箱	PLASTIC TUBE プラスチックチューブ	PRE-TINED X 4		KEYING 1	PBT GF15	NATURAL	I-1565749-1
2 	2	Ø 2.63	PAPER BOX ダンボール箱	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	KEYING 1	SPS GF17	NATURAL	I-1565749-0
4 	2	Ø 2.63	PLASTIC BOX 通し箱	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD	KEYING 2	SPS GF17	GRAY	I565749-8
2 	2	Ø 2.63	PLASTIC BOX 通し箱	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	KEYING 1	SPS GF17	NATURAL	I565749-7
3 	2.4	Ø 2.4	PAPER BOX ダンボール箱	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	KEYING 1	PBT GF15	NATURAL	I565749-6
2 	2	Ø 2.63	PLASTIC BOX 通し箱	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	KEYING 2	SPS GF17	GRAY	I565749-5
2 	2	Ø 2.63	PAPER BOX ダンボール箱	PLASTIC TUBE プラスチックチューブ	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	KEYING 2	SPS GF17	GRAY	I565749-4
I	2.4	Ø 2.4	PAPER BOX ダンボール箱	PLASTIC TUBE プラスチックチューブ	PRE-TINED X 4		KEYING 2	PBT GF15	GRAY	I565749-3
I					PRE-TINED X 4		KEYING 1	PBT GF15	NATURAL	I565749-1
 MARKING マーキング	WEIGHT (g) 質量	V	OUTER 外装	INNER 内装	SOLDERING SIDE 半田付け側	CONTACT SIDE 接點部側	KEYING 識別	MATERIAL 材料	COLOR 色	PART NUMBER 型番
			PACKING STYLE 梱包形態		CONTACT FINISH コンタクト仕上					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRAWN M. TASUDA 02NOV01		 TE Connectivity	
DIMENSIONS: mm		CHECKED K. KOHNO 02NOV01			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差=±0.3		APPROVED N. SAI 02NOV01		NAME 025 4P CAP HOUSING ASSY 025 4P キャップ ハウジング アッセンブリ	
		PRODUCT SPEC NO. 108-5664 APPLICATION SPEC 0114-5250			
MATERIAL P-PLC		WEIGHT SEE TABLE		SIZE CAGE CODE DRAWING NO A100779C1565749	
CONTACT: BRASS HOUSING: SEE TABLE		Customer Drawing		RESTRICTED TO SCALE 5:1 SHEET 1 OF 1 REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1565749-4](#)