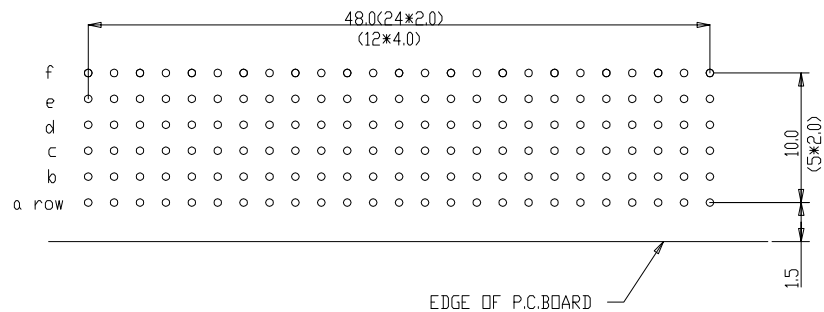
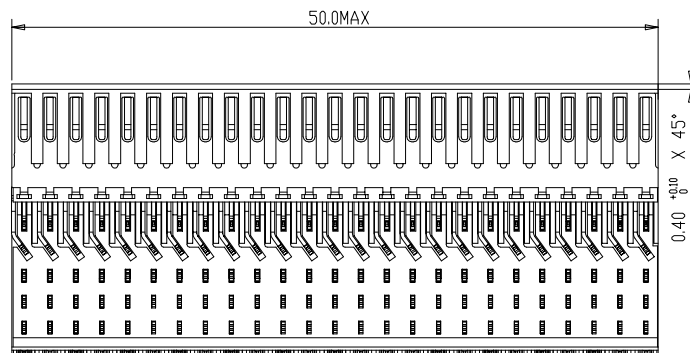
INSULATION RESISTANCE: $10^4 \text{ M}\Omega \text{ MIN}$

Plating code	Plating	Performance Level
AA	0.75µm Au	IEC performance level 2(250mating cycles)orTELCORDIA C0
AB	1.25µm Au	TELCORDIA UE

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- 3 .FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date	Dr	Nickor Zuo	Jul-20-09	size		Scale	
A	DG09-0243	NZ	Jul-20-2009	Eng	Nickor Zuo	Jul-20-09	Product family		A1	5.000
B	DG10-0093	NZ	Mar-08-2010	Chr	PeiMing Zheng	Jul-20-09	Model Name		ECN	
C	DG10-0110	NZ	Jun-08-2010	Appr	Joseph Hsia	Jul-20-09	Model Revision		REL Level	
						title	MPACS 5+2R RA RCP CONN TYPE B	dwg no	BSC201418032	Rev. C
					Pro/E file	CAT.NO. HM2R02PA5101----	CUSTOMER DRAWING			sheet 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R02PA5101E9LF](#) [HM2R02PA5101N9LF](#) [HM2R02PA5101AALF](#) [HM2R02PA5101L9LF](#) [HM2R02PA5101Z1LF](#)