
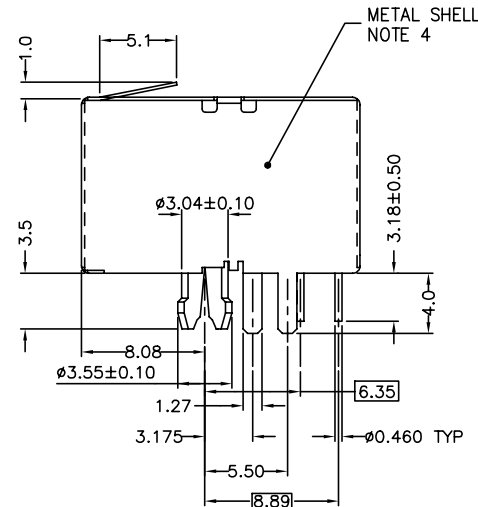



NOTES:

1. RECOMMENDED P.C.B. THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, COLOR: GRAY
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, Ø 0.460 ROUND WIRE, PLATING SEE TABLE.
- ④ METAL SHELL MATERIAL:  
COPPER ALLOY, 0.20MM THICK.  
FINISH: FOR 94927-XXX, TIN-LEAD, 100u" THICK MIN.  
FOR 94927-XXXLF, PURE BRIGHT TIN 80u" THICK MIN.
- ⑤ INSULATED TAPE: 3M COMPANY TAPE #5
6. PACKAGING PER GES-14-361, USING TUBE
7. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD
9. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION

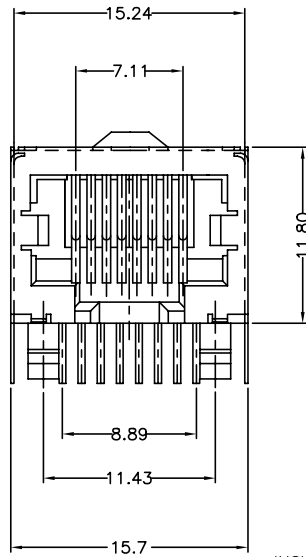


PRODUCT NO	NUMBER OF POS.	LOADED POSITION	PLATING
94927-088	8	ALL POS.	5u" Au + high performance lubricant
94927-088LF			


INSULATED TAPE NOTE 5

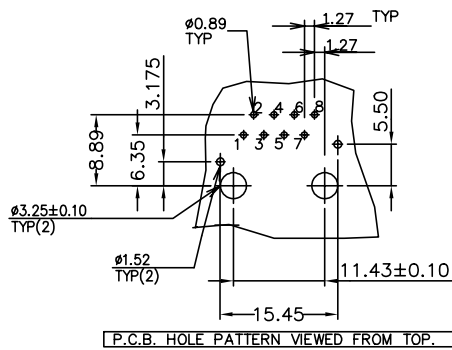

P.C.B. HOLE PATTERN VIEWED FROM TOP.

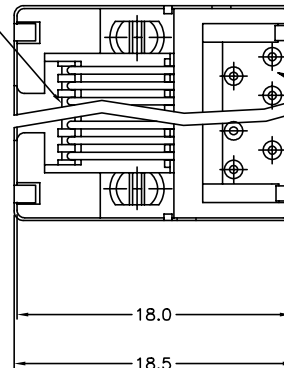

MOD JACK ASS'Y



POS. NO. CONFIGURATION

mat'l. code	surface ISO1302 ✓	tolerance ISO1101 ISO406	projection mm	product family MOD JACK
l trechn nodr	date	tolerances unless otherwise specified	scale: 2.0	title
B T50286	CL 10/20/95	0.X±0.3	mm	LOW PROFILE PCB III 8 POS
C T03-0443	WL 10/06/03	0.XX±0.15		MOD JACK, FULLY SHIELDED
D N05-0030	YS 02/05/05	0.XXX±0.05	scale: 2.0	
E ELX-N-011003	SH MM 03/25/12	dr CL FENG 03/06/95		dwg no sheet 1 of 1 size
		enr TONY CHIEN 03/06/95		94927 A4
		chr TONY CHIEN 03/06/95		type Product Customer Drawing
		app JENN TSAO 03/06/95		
sheet index	revision sheet 1			



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[94927-088LF](#) [94927-088HLF](#)